

Dual Rail-to-Rail I/O, High-Slew-Rate OP Amp

Features

- +2.2V to +5.5V Single-Supply Operation
- Input / Output Rail-to-Rail
- Low Input Current
- High Output Driving Capacity
- Low Quiescent Current: 1mA @ 5V
- High Slew Rate 6V/μs
- High Gain-Bandwidth Product 2.5MHz
- High Open Loop Gain 95dB
- High PSRR 70dB

Applications

- Headphone Driver
- Portable Equipment
- Battery-Powered Equipment
- Multimedia Audio
- ASIC Input or Output Amplifier
- Sensor Amplifier
- Low Power/Low Voltage Applications

General Description

G1224 is a input/output rail-to-rail Operational Amplifier. It can be operated from +2.2V to +5.5V single supply or from $\pm 1.1V$ to $\pm 2.75V$ dual supply. G1224 can drive 66mA into resistor loads to within 10% power rail each amplifier. AC performance is very excellent with 2.5MHz bandwidth, 6V/μs Slew Rate, 95dB open loop gain, 60 degree phase margin and low distortion.

Supply current of G1224 is only 500μA per Amplifier. It is very suitable for low current consumption applications to control high current loads. Applications include audio amplification for computers, sound ports, sound cards and set-top boxes.


G1224 is available in 8pins SOP-8, MSOP-8, TSSOP-8 and SOT-23-8 package.

Ordering Information


ORDER NUMBER	MARKING	TEMP. RANGE	PACKAGE (Green)
G1224P1U	G1224	-40°C to 85°C	SOP-8
G1224P8U	G1224	-40°C to 85°C	MSOP-8
G1224D1U	G1224	-40°C to 85°C	TSSOP-8
G1224TMU	1224x	-40°C to 85°C	SOT-23-8
G1224TMD	1224x	-40°C to 85°C	SOT-23-8

Note: P1: SOP-8 P8: MSOP-8 D1: TSSOP-8 TM: SOT-23-8
U & D: Tape & Reel

Pin Configuration

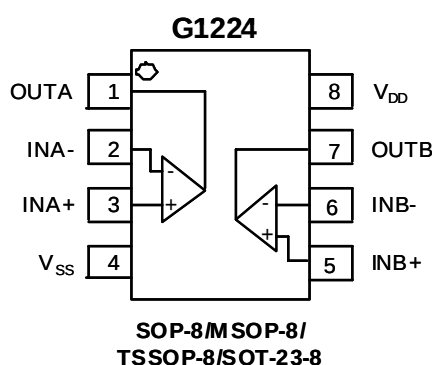

Typical Application Circuit

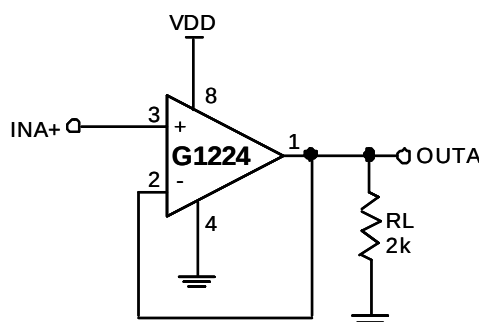

Absolute Maximum Ratings

Supply Voltage (V_{DD} to V_{SS}) 6.5V
 All Other Pins. ($V_{SS}-0.3V$) to ($V_{DD}+0.3V$)
 Continuous Power Dissipation ($T_A=25^{\circ}C$)
 SOP-8. 520mW
 MSOP-8. 520mW
 TSSOP-8. 520mW

θ_{JA} $240^{\circ}C/W$
 Junction Temperature. $150^{\circ}C$
 Operating Temperature Range $-40^{\circ}C$ to $85^{\circ}C$
 Storage Temperature Range $-65^{\circ}C$ to $150^{\circ}C$
 Reflow Temperature (Soldering, 10 sec) $260^{\circ}C$

Electrical Characteristics

$V_{DD} = 5V$; $V_{SS} = 0V$; $T_{amb} = 25^{\circ}C$; $C_L = 10pF$, $R_L = 1k\Omega$ to $V_{DD}/2$; unless otherwise specified.


PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Supplies						
Supply Voltage Range	V_{DD}	Note1	2.2	---	5.5	V
Supply Current	I_{DD}	No load	---	1	1.4	mA
Total Power Dissipation	P_{tot}	No load	---	5	7	mW
DC Characteristics						
Input Offset Voltage	$V_{I(OS)}$		---	± 5	± 20	mV
Common Mode Voltage	V_{CM}	Inferred from CMRR test	0	---	5	V
Input Bias Current	I_B		---	± 1.5	± 20	nA
Input Bias Current Offset	I_{OS}		---	± 1.5	± 20	nA
Input Resistance	R_{IN}		---	1000	---	$M\Omega$
Open Loop Gain	A_V		85	95	---	dB
Maximum Output Current	I_O	$V_{OUT} = \pm V_{IN} \times 90\%$	55	± 66	---	mA
Output Voltage Swing High	V_{OH}	$R_L = 2k\Omega$	4.96	4.99	---	V
Output Voltage Swing Low	V_{OL}	$R_L = 2k\Omega$	---	0.012	0.04	V
Power Supply Rejection Ratio	PSRR	$3V \leq V_{DD} \leq 5.5V$	45	70	---	dB
Common-Mode Rejection Ratio	CMRR	$V_{SS} \leq V_{CM} \leq V_{DD}$	42	65	---	dB
AC Characteristics						
Gain-Bandwidth Product	GBWP	Open-loop; No Load	---	2.5	---	MHz
Slew-Rate	SR	Measured from 10% to 90% of $4V_{P-P}$ step, $R_L = 1k\Omega$, $C_L = 10pF$	---	6	---	V/ μs
Phase Margin	PM		---	60	---	deg
Maximum Output Current with THD	I_O	THD < 0.1%, $R_L = 16\Omega$	---	100	---	mA
Channel Separation	CS	$f = 1kHz$ $R_L = 32\Omega$	---	85	---	dB

Note1: Guaranteed by the Power-Supply Rejection Ratio (PSRR) test




Typical Performance Characteristics





$V_{DD} = 5V$; $V_{SS} = 0V$; $T_{amb} = 25^{\circ}C$; $C_L = 10pF$, $R_L = 1k\Omega$ to $V_{DD}/2$; unless otherwise specified.

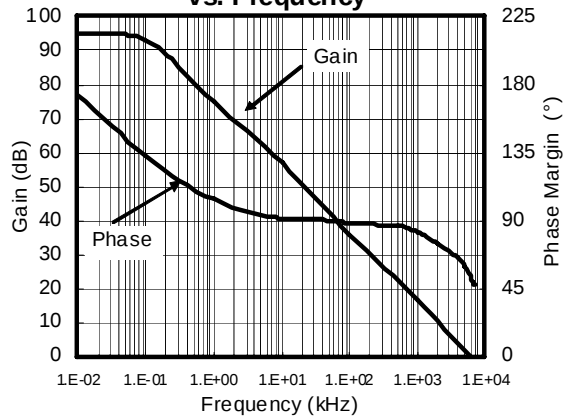Open Loop Gain & Phase Margin
vs. Frequency

PSRR vs. Frequency

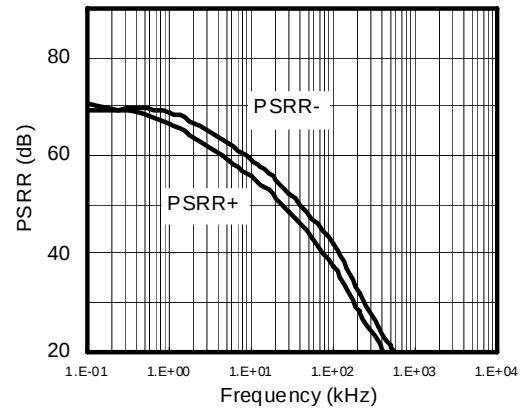


CMRR vs. Frequency

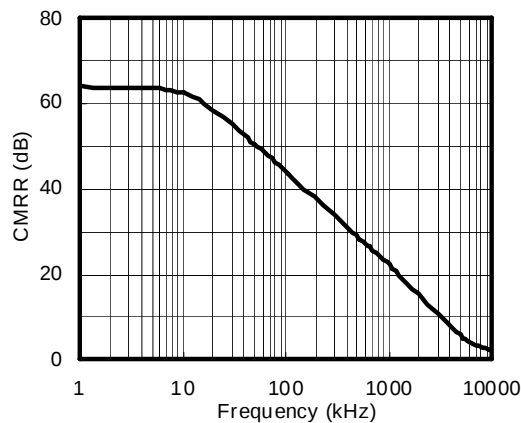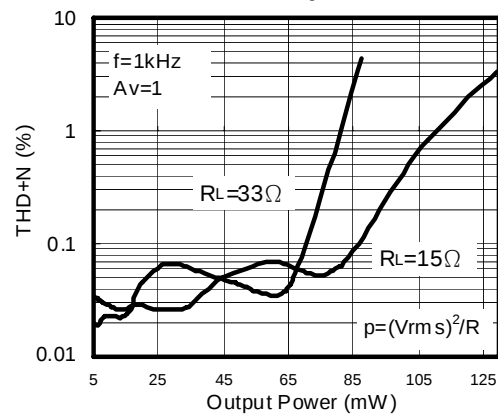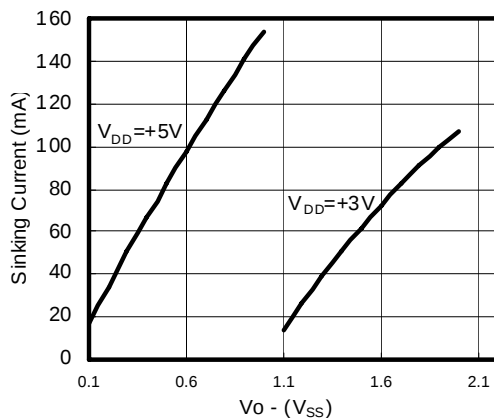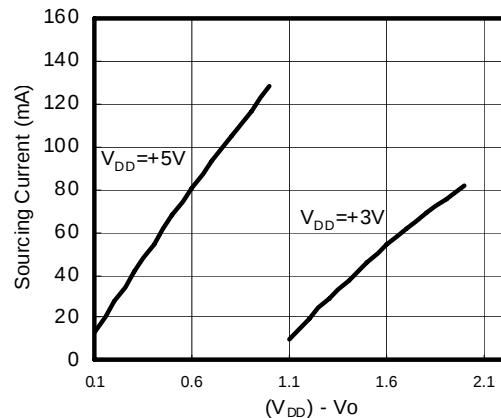
Total Harmonic Distortion Plus
Noise vs. Output PowerSinking Current vs. $V_O - (V_{SS})$ Sourcing Current vs. $(V_{DD}) - V_O$ 

Typical Performance Characteristics (Continued)


Large Signal Transient Response

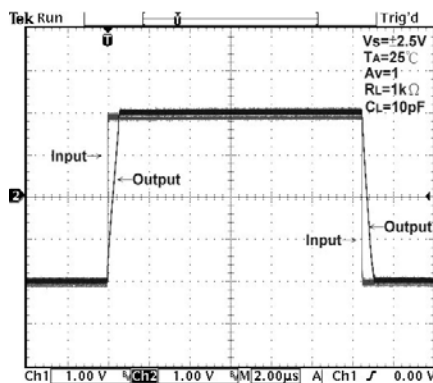


Small Signal Transient Response

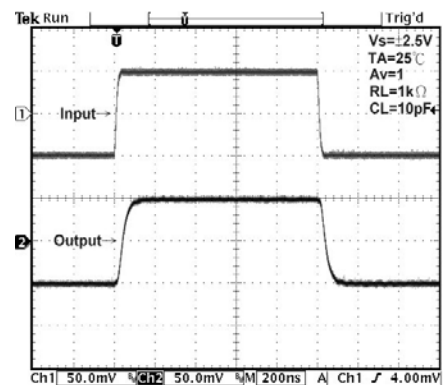


Operation with Rail-to-Rail Input and Output

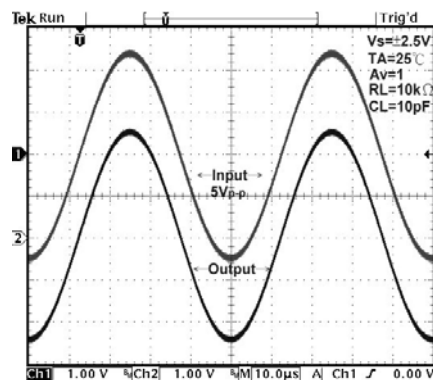


Operation with Beyond-the Rail Input

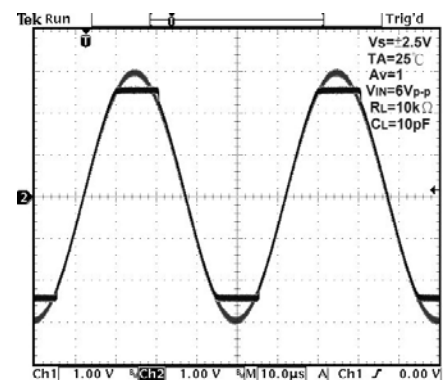

Minimum Footprint PCB Layout Section

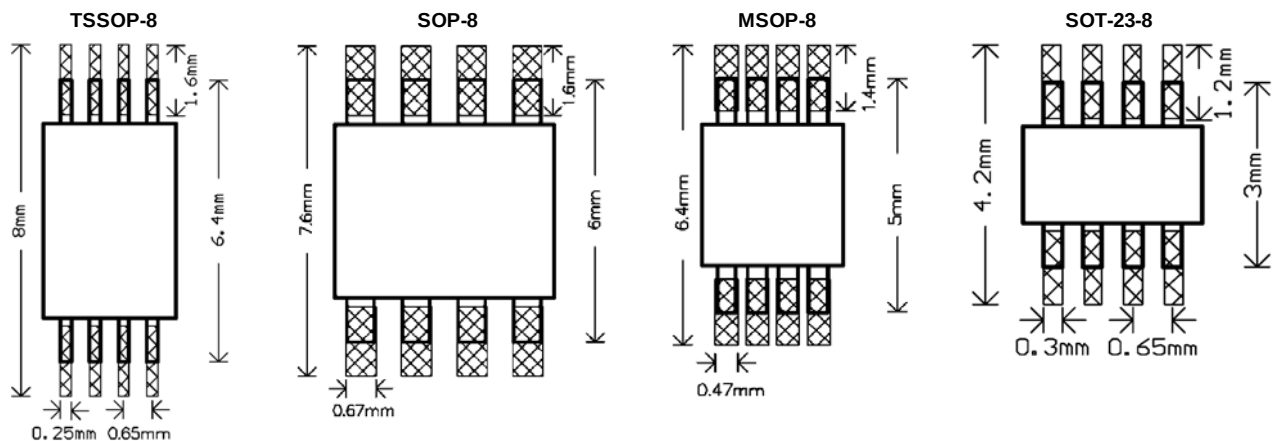


Package Information

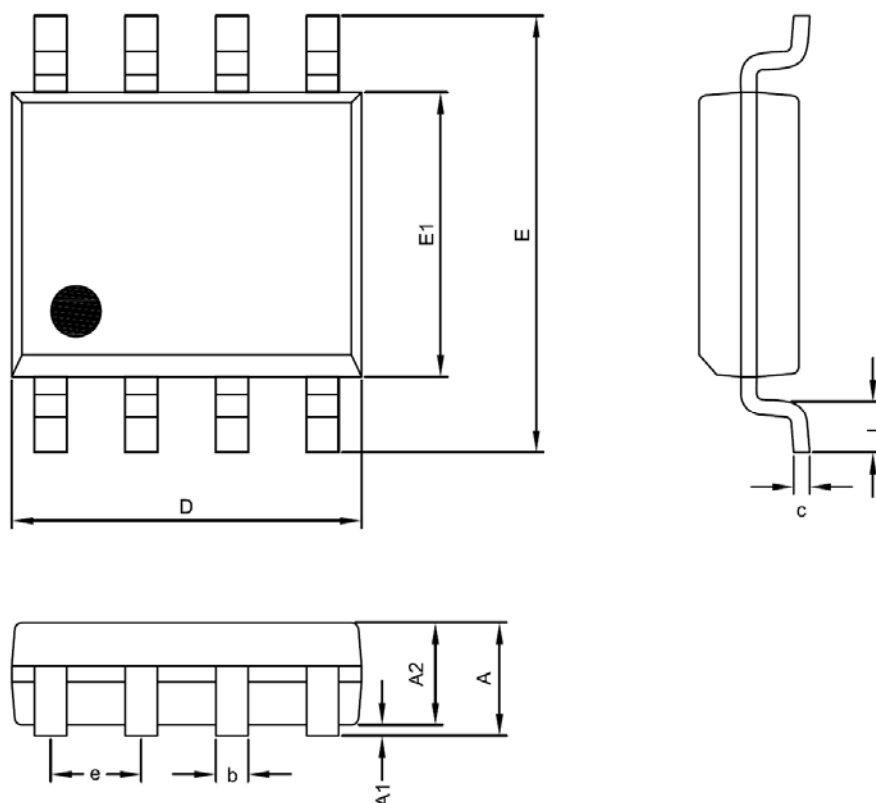


SOP-8 Package

Symble	DIMENSION IN MM			DIMENSION IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	1.35	1.55	1.75	0.053	0.061	0.069
A1	0.00	---	0.25	0.000	---	0.010
A2	1.15	1.35	1.50	0.045	0.053	0.059
D	4.80	4.90	5.00	0.189	0.192	0.197
E	5.80	6.00	6.20	0.228	0.236	0.244
E1	3.80	3.90	4.00	0.150	0.153	0.157
c	0.19	0.23	0.27	0.007	0.009	0.011
b	0.33	0.43	0.53	0.013	0.017	0.021
e	1.27 BSC			0.050 BSC		
L	0.40	0.7	1.00	0.016	0.028	0.039

Taping Specification




PACKAGE	Q'TY/REEL
SOP-8	2,500 ea

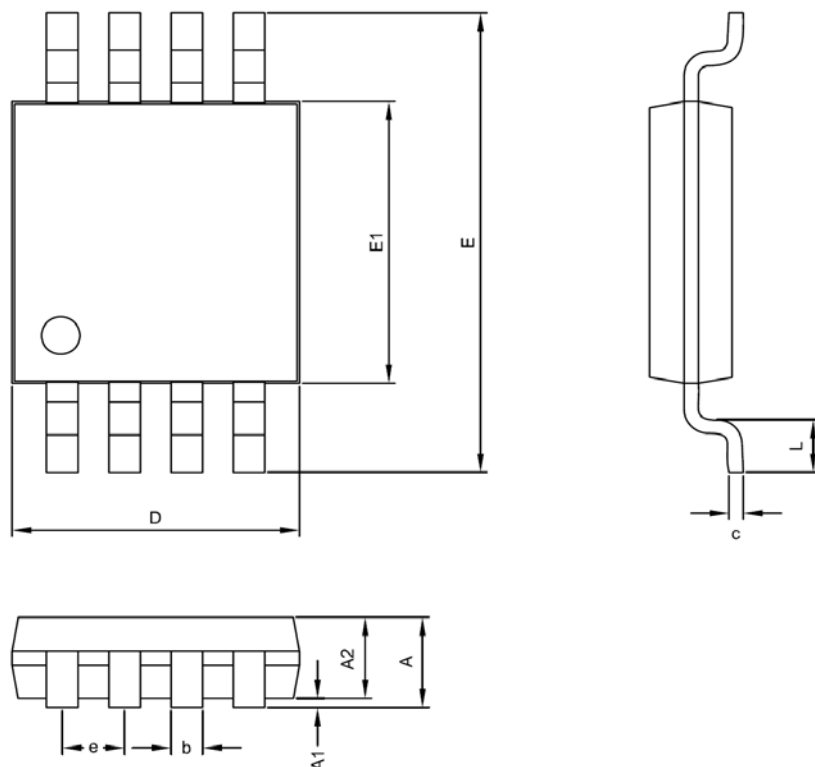


MSOP-8 Package

Symble	DIMENSION IN MM			DIMENSION IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.81	0.95	1.10	0.032	0.037	0.043
A1	0.00	---	0.15	0.000	---	0.006
A2	0.76	0.86	0.96	0.030	0.034	0.038
D	2.90	3.00	3.10	0.114	0.118	0.122
E	4.80	4.90	5.00	0.189	0.193	0.197
E1	2.90	3.00	3.10	0.114	0.118	0.122
c	0.13	0.15	0.23	0.005	0.006	0.009
b	0.28	0.30	0.38	0.011	0.012	0.015
e	0.65 BSC			0.026 BSC		
L	0.4	0.53	0.8	0.016	0.021	0.026

Taping Specification

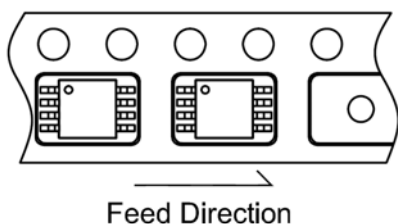


PACKAGE	Q'TY/REEL
MSOP-8	3,000 ea

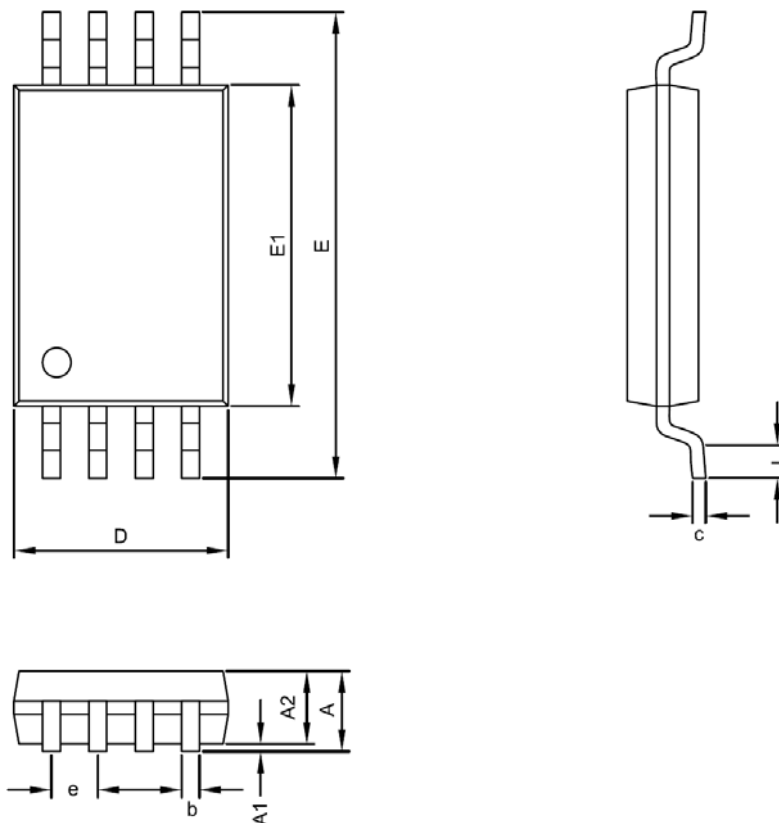


TSSOP-8 Package

Symble	DIMENSION IN MM			DIMENSION IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	---	---	1.20	---	---	0.048
A1	0.00	---	0.15	0.000	---	0.006
A2	0.85	1.00	1.05	0.033	0.039	0.041
D	2.90	3.00	3.10	0.114	0.118	0.122
E	6.20	6.40	6.60	0.244	0.252	0.260
E1	4.30	4.40	4.50	0.169	0.173	0.177
c	0.09	---	0.20	0.004	---	0.008
b	0.19	0.22	0.30	0.008	0.009	0.012
e	0.65 BSC			0.026 BSC		
L	0.45	0.60	0.75	0.018	0.024	0.030

Taping Specification




PACKAGE	Q'TY/REEL
TSSOP-8	3,000 ea

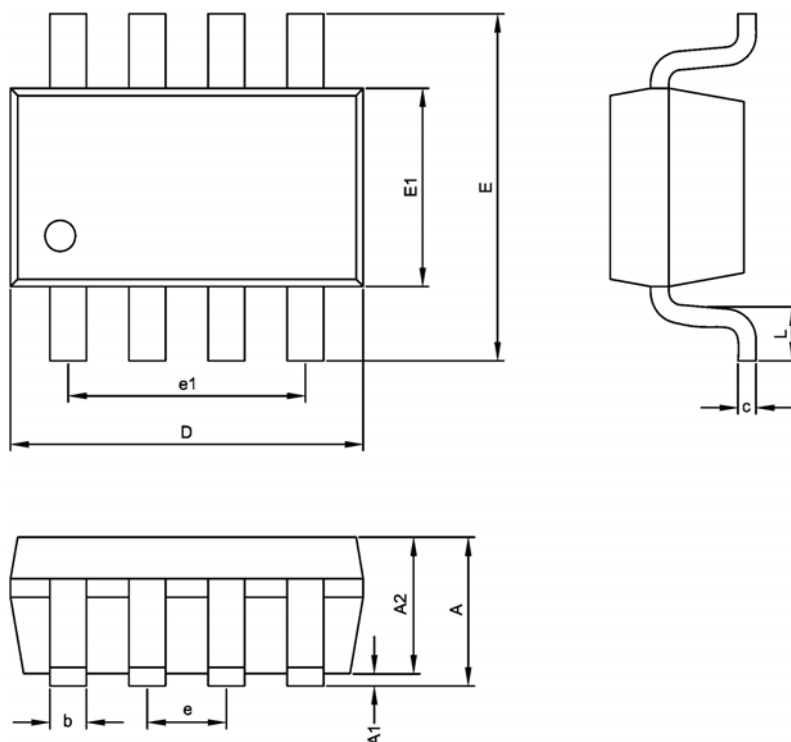

SOT-23-8 Package

Symble	DIMENSION IN MM			DIMENSION IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	1.00	1.10	1.45	0.039	0.043	0.057
A1	0.00	---	0.15	0.000	---	0.006
A2	1.00	1.10	1.30	0.039	0.043	0.051
D	2.80	2.90	3.00	0.110	0.114	0.118
E	2.60	2.80	3.00	0.102	0.110	0.118
E1	1.50	1.60	1.70	0.059	0.063	0.067
c	0.08	0.15	0.25	0.003	0.006	0.010
b	0.22	0.30	0.40	0.008	0.012	0.016
e	0.65 BSC			0.026 BSC		
e1	1.95 BSC			0.077 BSC		
L	0.30	0.45	0.60	0.012	0.018	0.024

Taping Specification

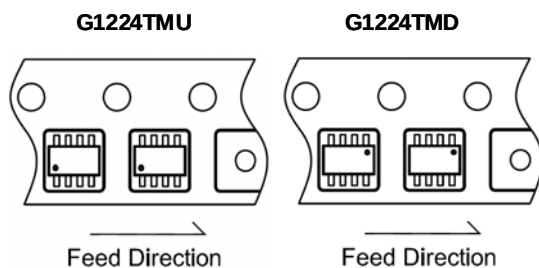

PACKAGE	Q'TY/REEL
SOT-23-8	3,000 ea

GMT Inc. does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and GMT Inc. reserves the right at any time without notice to change said circuitry and specifications.