

## Power Distribution Switch

### Features

- 40mΩ/70mΩ High-Side MOSFET
- Available with Current Limits with Foldback
- Operating Range: 2.7V to 5.5V
- 1mS Typical Rise Time
- Fast Overcurrent Response -1.5μs (TYPICAL)
- Under voltage Lockout
- Logic Level Enable Pin, Available with Active-High or Active-Low Version
- No Reverse Current when Power Off
- Deglitched Open-Drain Over-Current Flag Output (FLAG)
- Output Reverse Current Protection
- SOT-23-5, TSOT-23-6, TDFN2x2-6, WDFN2x2-6, TSOT-23-6 FC, TSOT-23-5 FC, and MSOP-8 Packages (Halogen Free/Pb Free)
- UL 2367 Recognition-File NO. E232223
- IEC 60950-1 Certified
- IEC 62368-1 Certified

### Applications

- High-Side Power Protection Switch
- USB Power Management
- USB Host and Self-Powered Bubs
- USB Bus-Powered Hubs
- Hot Plug-In Power Supplies
- Battery-Charger Circuits


### General Description

The G517 is an integrated power switch for self-powered and bus-powered Universal Serial Bus (USB) applications.


Several Protection features include current limiting and thermal shutdown to prevent catastrophic switch failure caused by increasing power dissipation when continuous heavy loads or short circuit occurs. A built-in charge pump is used to drive the N-channel MOSFET that is free of parasitic body diode to eliminate any reversed current flow across the switch when it is powered off. The output reverse-current protection turns off the MOSFET switch whenever the unexpected continuously reverse current occurs.

FLAG is an open-drain output report over-current or over-temperature event and has typical 9ms deglitch timeout period.

### Pin Configuration

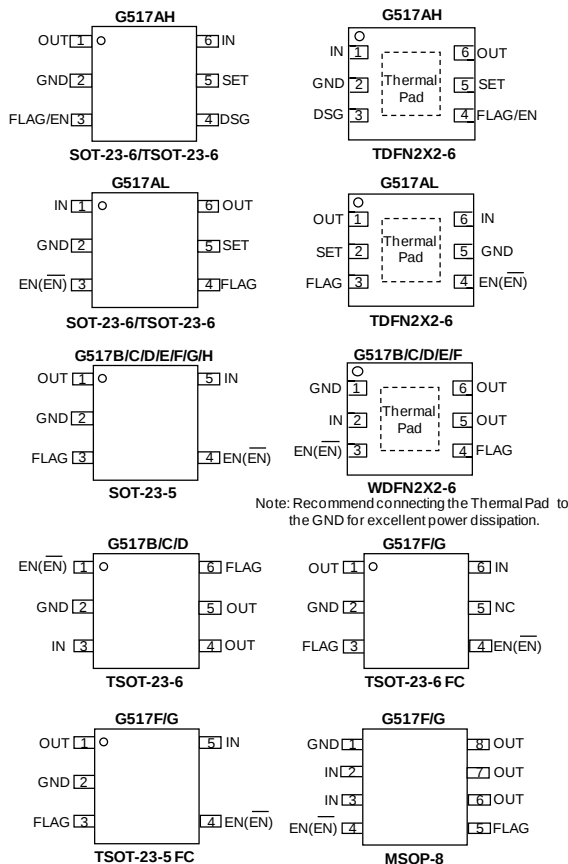

### Typical Application Circuit

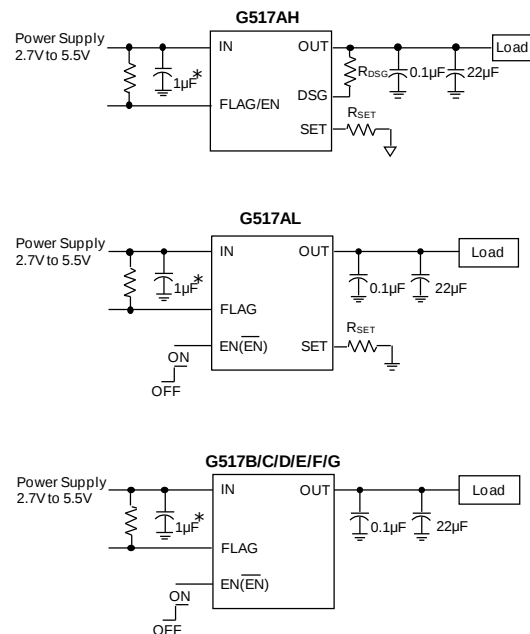

\*: 1μF of input capacitor is enough in most application cases.  
If the PCB trace of power rail to IN is long, larger input capacitor is necessary.

**Ordering Information**

| ORDER NUMBER | MARKING | ENABLE      | Current Limit | Output MOS $R_{DS(ON)}$ | Discharge Resistor | TEMP. RANGE    | PACKAGE (Green) |
|--------------|---------|-------------|---------------|-------------------------|--------------------|----------------|-----------------|
| G517AH1TP1U  | 5AACx   | Active High | SET           | 70m $\Omega$            | Yes                | -40°C to +85°C | TSOT-23-6       |
| G517AH1TB1U  | 5AACx   | Active High | SET           | 60m $\Omega$            | Yes                | -40°C to +85°C | SOT-23-6        |
| G517AH1RB1U  | 5AAC    | Active High | SET           | 60m $\Omega$            | Yes                | -40°C to +85°C | TDFN2x2-6       |
| G517AL1TP1U  | 5AAAx   | Active High | SET           | 70m $\Omega$            | Yes                | -40°C to +85°C | TSOT-23-6       |
| G517AL2TP1U  | 5AABx   | Active Low  | SET           | 70m $\Omega$            | Yes                | -40°C to +85°C | TSOT-23-6       |
| G517AL1TB1U  | 5AAAx   | Active High | SET           | 60m $\Omega$            | Yes                | -40°C to +85°C | SOT-23-6        |
| G517AL2TB1U  | 5AABx   | Active Low  | SET           | 60m $\Omega$            | Yes                | -40°C to +85°C | SOT-23-6        |
| G517AL1RB1U  | 5AAA    | Active High | SET           | 60m $\Omega$            | Yes                | -40°C to +85°C | TDFN2x2-6       |
| G517AL2RB1U  | 5AAB    | Active Low  | SET           | 60m $\Omega$            | Yes                | -40°C to +85°C | TDFN2x2-6       |
| G517AL1RB1D  | 5AAA    | Active High | SET           | 60m $\Omega$            | Yes                | -40°C to +85°C | TDFN2x2-6       |
| G517AL2RB1D  | 5AAB    | Active Low  | SET           | 60m $\Omega$            | Yes                | -40°C to +85°C | TDFN2x2-6       |
| G517B1T11U   | 5AB1x   | Active High | 0.4A          | 75m $\Omega$            | Yes                | -40°C to +85°C | SOT-23-5        |
| G517B1T12U   | 5ABAx   | Active High | 0.4A          | 75m $\Omega$            | Yes                | -40°C to +85°C | SOT-23-5        |
| G517B2T11U   | 5AB2x   | Active Low  | 0.4A          | 75m $\Omega$            | Yes                | -40°C to +85°C | SOT-23-5        |
| G517B3T11U   | 5AB3x   | Active High | 0.4A          | 75m $\Omega$            | No                 | -40°C to +85°C | SOT-23-5        |
| G517B4T11U   | 5AB4x   | Active Low  | 0.4A          | 75m $\Omega$            | No                 | -40°C to +85°C | SOT-23-5        |
| G517B1U51U   | 5AB1    | Active High | 0.4A          | 70m $\Omega$            | Yes                | -40°C to +85°C | WDFN2x2-6       |
| G517B2U51U   | 5AB2    | Active Low  | 0.4A          | 70m $\Omega$            | Yes                | -40°C to +85°C | WDFN2x2-6       |
| G517C1T11U   | 5AC1x   | Active High | 0.8A          | 75m $\Omega$            | Yes                | -40°C to +85°C | SOT-23-5        |
| G517C1T12U   | 5ACAx   | Active High | 0.8A          | 75m $\Omega$            | Yes                | -40°C to +85°C | SOT-23-5        |
| G517C2T11U   | 5AC2x   | Active Low  | 0.8A          | 75m $\Omega$            | Yes                | -40°C to +85°C | SOT-23-5        |
| G517C3T11U   | 5AC3x   | Active High | 0.8A          | 75m $\Omega$            | No                 | -40°C to +85°C | SOT-23-5        |
| G517C4T11U   | 5AC4x   | Active Low  | 0.8A          | 75m $\Omega$            | No                 | -40°C to +85°C | SOT-23-5        |
| G517C1U51U   | 5AC1    | Active High | 0.8A          | 70m $\Omega$            | Yes                | -40°C to +85°C | WDFN2x2-6       |
| G517C2U51U   | 5AC2    | Active Low  | 0.8A          | 70m $\Omega$            | Yes                | -40°C to +85°C | WDFN2x2-6       |
| G517D1T11U   | 5AD1x   | Active High | 1.3A          | 75m $\Omega$            | Yes                | -40°C to +85°C | SOT-23-5        |
| G517D1T12U   | 5ADAx   | Active High | 1.3A          | 75m $\Omega$            | Yes                | -40°C to +85°C | SOT-23-5        |
| G517D1TP2U   | 5ADAx   | Active High | 1.3A          | 75m $\Omega$            | Yes                | -40°C to +85°C | TSOT-23-6       |
| G517D2T11U   | 5AD2x   | Active Low  | 1.3A          | 75m $\Omega$            | Yes                | -40°C to +85°C | SOT-23-5        |
| G517D1U51U   | 5AD1    | Active High | 1.3A          | 70m $\Omega$            | Yes                | -40°C to +85°C | WDFN2x2-6       |
| G517D2U51U   | 5AD2    | Active Low  | 1.3A          | 70m $\Omega$            | Yes                | -40°C to +85°C | WDFN2x2-6       |
| G517E1T11U   | 5AE1x   | Active High | 1.8A          | 75m $\Omega$            | Yes                | -40°C to +85°C | SOT-23-5        |
| G517E2T11U   | 5AE2x   | Active Low  | 1.8A          | 75m $\Omega$            | Yes                | -40°C to +85°C | SOT-23-5        |
| G517E1U51U   | 5AE1    | Active High | 1.8A          | 70m $\Omega$            | Yes                | -40°C to +85°C | WDFN2x2-6       |
| G517E2U51U   | 5AE2    | Active Low  | 1.8A          | 70m $\Omega$            | Yes                | -40°C to +85°C | WDFN2x2-6       |

**Ordering Information (Continued)**

| ORDER NUMBER | MARKING | ENABLE      | Current Limit | Output MOS $R_{DS(ON)}$ | Discharge Resistor | TEMP. RANGE    | PACKAGE (Green) |
|--------------|---------|-------------|---------------|-------------------------|--------------------|----------------|-----------------|
| G517F1T11U   | 5AF1x   | Active High | 2.5A          | 65mΩ                    | Yes                | -40°C to +85°C | SOT-23-5        |
| G517F2T11U   | 5AF2x   | Active Low  | 2.5A          | 65mΩ                    | Yes                | -40°C to +85°C | SOT-23-5        |
| G517F1U51U   | 5AF1    | Active High | 2.5A          | 64mΩ                    | Yes                | -40°C to +85°C | WDFN2x2-6       |
| G517F2U51U   | 5AF2    | Active Low  | 2.5A          | 64mΩ                    | Yes                | -40°C to +85°C | WDFN2x2-6       |
| G517F1TP1U   | 5AF1x   | Active High | 2.5A          | 40mΩ                    | Yes                | -40°C to +85°C | TSOT-23-6 FC    |
| G517F2TP1U   | 5AF2x   | Active Low  | 2.5A          | 40mΩ                    | Yes                | -40°C to +85°C | TSOT-23-6 FC    |
| G517F1TO1U   | 5AF1x   | Active High | 2.5A          | 40mΩ                    | Yes                | -40°C to +85°C | TSOT-23-5 FC    |
| G517F2TO1U   | 5AF2x   | Active Low  | 2.5A          | 40mΩ                    | Yes                | -40°C to +85°C | TSOT-23-5 FC    |
| G517F1P81U   | G517F1  | Active High | 2.5A          | 56mΩ                    | Yes                | -40°C to +85°C | MSOP-8          |
| G517F2P81U   | G517F2  | Active Low  | 2.5A          | 56mΩ                    | Yes                | -40°C to +85°C | MSOP-8          |
| G517G1T11U   | 5AG1x   | Active High | 3.4A          | 65mΩ                    | Yes                | -40°C to +85°C | SOT-23-5        |
| G517G2T11U   | 5AG2x   | Active Low  | 3.4A          | 65mΩ                    | Yes                | -40°C to +85°C | SOT-23-5        |
| G517H1T11U   | 5AH1x   | Active High | 3.2A          | 65mΩ                    | Yes                | -40°C to +85°C | SOT-23-5        |
| G517H2T11U   | 5AH2x   | Active Low  | 3.2A          | 65mΩ                    | Yes                | -40°C to +85°C | SOT-23-5        |
| G517G1TP1U   | 5AG1x   | Active High | 3.4A          | 40mΩ                    | Yes                | -40°C to +85°C | TSOT-23-6 FC    |
| G517G2TP1U   | 5AG2x   | Active Low  | 3.4A          | 40mΩ                    | Yes                | -40°C to +85°C | TSOT-23-6 FC    |
| G517G1TO1U   | 5AG1x   | Active High | 3.4A          | 40mΩ                    | Yes                | -40°C to +85°C | TSOT-23-5 FC    |
| G517G2TO1U   | 5AG2x   | Active Low  | 3.4A          | 40mΩ                    | Yes                | -40°C to +85°C | TSOT-23-5 FC    |
| G517G1P81U   | G517G1  | Active High | 3.4A          | 56mΩ                    | Yes                | -40°C to +85°C | MSOP-8          |
| G517G2P81U   | G517G2  | Active Low  | 3.4A          | 56mΩ                    | Yes                | -40°C to +85°C | MSOP-8          |

Note: T1:SOT-23-5 TB: SOT-23-6 TP:TSOT-23-6/TSOT-23-6 FC RB:TDFN2x2-6

U5:WDFN2x2-6 TO:TSOT-23-5 FC P8: MSOP-8

1, 2: Bonding Code

U&D: Tape & Reel

Green : Lead Free / Halogen Free

## Absolute Maximum Ratings

Terminal Voltage (with respect to GND)

|                                       |                        |
|---------------------------------------|------------------------|
| IN Pin Voltage, $V_{IN}$              | -0.3V to +6.0V         |
| OUT Pin Voltage, $V_{OUT}$            | -0.3V to +6.0V         |
| EN Pin Voltage, $V_{EN}$              | -0.3V to +6.0V         |
| SET Pin Voltage, $V_{SET}$            | -0.3V to $V_{IN}+0.3V$ |
| FLAG Pin Voltage, $V_{FLAG}$          | -0.3V to +6.0V         |
| DSG Pin Voltage, $V_{DSG}$            | -0.3V to +6.0V         |
| Junction Temperature                  | 150°C                  |
| Storage Temperature ( $T_S$ )         | -65°C to +150°C        |
| Reflow Temperature (soldering, 10sec) | 260°C                  |
| ESD(HBM) <sup>(1)</sup>               | 2KV                    |
| ESD(MM)                               | 200V                   |
| ESD(CDM)                              | 1KV                    |
| Output ESD Protection                 | 4KV                    |

Continuous Power Dissipation ( $T_A = +25^\circ\text{C}$ )\*

|                                                            |         |
|------------------------------------------------------------|---------|
| SOT-23-5                                                   | 0.52W   |
| TSOT-23-6                                                  | 0.52W   |
| TDFN2X2-6/WDFN2X2-6                                        | 0.55W   |
| MSOP-8                                                     | 0.57W   |
| TSOT-23-5/6 FC                                             | 0.9W    |
| Thermal Resistance Junction to Ambient, ( $\theta_{JA}$ )* |         |
| SOT-23-5                                                   | 240°C/W |
| TSOT-23-6                                                  | 240°C/W |
| TDFN2X2-6/WDFN2X2-6                                        | 255°C/W |
| MSOP-8                                                     | 200°C/W |
| TSOT-23-5/6 FC                                             | 125°C/W |
| Thermal Resistance Junction to Case, ( $\theta_{JC}$ )     |         |
| SOT-23-5                                                   | 60°C/W  |
| TSOT-23-6                                                  | 60°C/W  |
| TDFN2X2-6/WDFN2X2-6                                        | 63°C/W  |
| MSOP-8                                                     | 55°C/W  |
| TSOT-23-5/6 FC                                             | 33°C/W  |

## Operating Ratings

|                                 |                |
|---------------------------------|----------------|
| Supply Voltage ( $V_{IN}$ )     | 2.7V to 5.5V   |
| Operating Temperature ( $T_A$ ) | -40°C to +85°C |

\*Please refer to Minimum Footprint PCB Layout Section.

(1) Human body model is a 100pF capacitor discharged through a 1.5k $\Omega$  resistor into each pin.

## Electrical Characteristics (G517AH)

$V_{IN} = 5V$ ,  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $R_L = 10\Omega$ ,  $T_A = 25^\circ\text{C}$ .

The device is not guaranteed to function outside its operating conditions. Parameters with MIN and/or MAX limits are 100% tested at +25°C, unless otherwise specified.

| DESCRIPTION                              | SYMBOL            | CONDITION                                                     | MIN        | TYP      | MAX      | UNIT       |
|------------------------------------------|-------------------|---------------------------------------------------------------|------------|----------|----------|------------|
| Operation Voltage                        | $V_{IN}$          |                                                               | 2.7        | ---      | 5.5      | V          |
| Quiescent Current                        | $I_Q$             | $V_{IN} = 5V$ , $I_{OUT} = 0$ , not including $I_{RSET}$      | ---        | 150      | 200      | $\mu A$    |
| Off Supply Current                       | $I_{Q(OFF)}$      | $V_{IN} = 5V$ , FLAG/EN=0                                     | ---        | 20       | 40       | $\mu A$    |
| $V_{IN}$ Under-Voltage Lockout           | $V_{UVLO}$        |                                                               | 2.0        | ---      | 2.6      | V          |
| Output MOS $R_{DS(ON)}$                  | $R_{DS(ON)}$      | $I_{OUT} = 1.5A$ , $R_{SET} = 10.5k\Omega$                    |            |          |          | m $\Omega$ |
|                                          |                   | TSOT-23-6                                                     | ---        | 70       | 90       |            |
|                                          |                   | SOT-23-6<br>TDFN2x2-6                                         | ---        | 60       | 75       |            |
| Over Current Trigger Point               | $I_{LIM}$         | $R_{SET} = 7.68k\Omega$                                       | 2.43       | 2.7      | 2.97     | A          |
|                                          |                   | $R_{SET} = 10.5k\Omega$                                       | 1.8        | 2        | 2.2      |            |
|                                          |                   | $R_{SET} = 21k\Omega$                                         | 0.9        | 1        | 1.1      |            |
|                                          |                   | $R_{SET} = 42k\Omega$                                         | 0.4        | 0.5      | 0.6      |            |
| EN Input Threshold-High $V_{IH}$         | $V_{EN(H)}$       | $V_{IN} = 2.7V$ to 5.5V                                       | 1.2        | ---      | ---      | V          |
| EN Input Threshold-Low $V_{IL}$          | $V_{EN(L)}$       | $V_{IN} = 2.7V$ to 5.5V                                       | ---        | ---      | 0.6      | V          |
| Output Turn-on Rising Time               | $T_r$             | $R_{LOAD} = 100\Omega$ , $C_{OUT} = 1\mu F$ ,<br>90% Settling |            |          |          | ms         |
|                                          |                   | $V_{IN} = 5V$<br>$V_{IN} = 3.3V$                              | 1.0<br>1.6 | 1.5<br>2 | 2<br>2.4 |            |
| FLAG Deglitch                            | $T_{FLAG}$        | Over Current Condition                                        | 2          | 3        | 4        | ms         |
|                                          | $T_{SCS}$         | Short Circuit Start                                           | 3          | 5        | 7        | ms         |
| Shutdown DSG Pull Low Resistance         |                   |                                                               | ---        | 15       | 30       | $\Omega$   |
| $t_{IOS}$ Response Time to Short Circuit | $t_{IOS}$         | $V_{IN} = 5V$ , see figure 1, 2                               | ---        | 1.5      | ---      | $\mu s$    |
| Output Reverse-Current Trigger Point     |                   | $V_{IN} = 5V$                                                 | 0.2        | 0.8      | ---      | A          |
| Output Reverse- Current Deglitch Time    |                   | $V_{IN} = 5V$                                                 | ---        | 0.7      | ---      | ms         |
| Thermal Shutdown                         | OT                | Rising temperature                                            | ---        | 150      | ---      | $^\circ C$ |
|                                          | OT <sub>HYS</sub> | Hysteresis                                                    | ---        | 50       | ---      |            |

**Electrical Characteristics (G517AL)**
 $V_{IN} = 5V$ ,  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $R_L = 10\Omega$   $T_A = 25^\circ C$ .

The device is not guaranteed to function outside its operating conditions. Parameters with MIN and/or MAX limits are 100% tested at  $+25^\circ C$ , unless otherwise specified.

| DESCRIPTION                              | SYMBOL            | CONDITION                                                          | MIN   | TYP  | MAX   | UNIT       |
|------------------------------------------|-------------------|--------------------------------------------------------------------|-------|------|-------|------------|
| Operation Voltage                        | $V_{IN}$          |                                                                    | 2.7   | ---  | 5.5   | V          |
| Quiescent Current                        | $I_Q$             | $V_{IN}=5V$ , $I_{OUT}=0$ ,<br>$EN(\overline{EN}) = \text{Active}$ |       |      |       |            |
|                                          |                   | $R_{SET} = 20k\Omega$                                              | ---   | 150  | ---   | $\mu A$    |
|                                          |                   | $R_{SET} = 100k\Omega$                                             | ---   | 135  | ---   |            |
| Off Supply Current                       | $I_{Q(OFF)}$      | $V_{IN}=5.5V$ , $EN(\overline{EN}) = \text{Inactive}$              | ---   | ---  | 1     | $\mu A$    |
| $V_{IN}$ Under-Voltage Lockout           | $V_{UVLO}$        |                                                                    | 1.7   | 2.1  | 2.4   | V          |
| Output MOS $R_{DS(ON)}$                  | $R_{DS(ON)}$      | $I_{OUT}=2A$ , $R_{SET}=10k\Omega$                                 |       |      |       |            |
|                                          |                   | TSOT-23-6                                                          | ---   | 70   | 90    | $m\Omega$  |
|                                          |                   | SOT-23-6<br>TDFN2x2-6                                              | ---   | 60   | 75    |            |
| $R_{SET}$ Resistor Range                 |                   | $V_{IN}=3V$                                                        | 20    | ---  | 100   | $k\Omega$  |
|                                          |                   | $V_{IN}=5V$                                                        | 10    | ---  | 100   |            |
| Over Current Trigger Point               | $I_{LIM}$         | $R_{SET}=9.76k\Omega$                                              | 2.58  | 2.87 | 3.16  | A          |
|                                          |                   | $R_{SET}=11k\Omega$                                                | 2.25  | 2.5  | 2.75  |            |
|                                          |                   | $R_{SET}=24.9k\Omega$                                              | 0.9   | 1    | 1.1   |            |
|                                          |                   | $R_{SET}=37.4k\Omega$                                              | 0.6   | 0.7  | 0.8   |            |
|                                          |                   | $R_{SET}=49.9k\Omega$                                              | 0.425 | 0.5  | 0.575 |            |
|                                          |                   | $R_{SET}=75k\Omega$                                                | 0.264 | 0.33 | 0.4   |            |
|                                          |                   | $R_{SET}=100k\Omega$                                               | 0.175 | 0.25 | 0.325 |            |
| Short-Circuit Fold-Back Current          | $I_{SFB}$         | $R_{SET}=11k\Omega$ , $V_{IN}>3.5V$ and $V_{OUT}<1V$               | ---   | 1.67 | ---   | A          |
|                                          |                   | $R_{SET}=24.9k\Omega$ , $V_{IN}>3.5V$ and $V_{OUT}<1V$             | ---   | 0.67 | ---   |            |
|                                          |                   | $R_{SET}=37.4k\Omega$ , $V_{IN}>3.5V$ and $V_{OUT}<1V$             | ---   | 0.47 | ---   |            |
|                                          |                   | $R_{SET}=49.9k\Omega$ , $V_{IN}>3.5V$ and $V_{OUT}<1V$             | ---   | 0.33 | ---   |            |
|                                          |                   | $R_{SET}=75k\Omega$ , $V_{IN}>3.5V$ and $V_{OUT}<1V$               | ---   | 0.22 | ---   |            |
|                                          |                   | $R_{SET}=100k\Omega$ , $V_{IN}>3.5V$ and $V_{OUT}<1V$              | ---   | 0.17 | ---   |            |
| EN Input Threshold-High $V_{IH}$         | $V_{EN(H)}$       | $V_{IN}=2.7V$ to $5.5V$                                            | 1.4   | ---  | ---   | V          |
| EN Input Threshold-Low $V_{IL}$          | $V_{EN(L)}$       | $V_{IN}=2.7V$ to $5.5V$                                            | ---   | ---  | 0.6   | V          |
| Output Turn-on Rising Time               | $T_r$             | $R_{LOAD}=100\Omega$ , $C_{OUT}=1\mu F$ ,<br>90% Settling          |       |      |       |            |
|                                          |                   | $V_{IN}=5V$                                                        | 1.0   | 1.5  | 2     | $ms$       |
|                                          |                   | $V_{IN}=3.3V$                                                      | 1.6   | 2    | 2.4   |            |
| FLAG Deglitch                            | $T_{FLAG}$        | FLAG assertion or deassertion                                      | 5     | 9    | 15    | $ms$       |
| Shutdown OUT Pull Low Resistance         |                   |                                                                    | ---   | 600  | 900   | $\Omega$   |
| $t_{IOS}$ Response Time to Short Circuit | $t_{IOS}$         | $V_{IN}=5V$ , see figure 1, 2                                      | ---   | 1.5  | ---   | $\mu s$    |
| Output Reverse-Current threshold         |                   |                                                                    | 0.2   | 1.9  | ---   | A          |
| Output Reverse-Current Deglitch Time     |                   | $V_{IN}=5V$                                                        | ---   | 5    | ---   | $ms$       |
| Over Current Regulation Time             | $T_{REG}$         | $V_{IN}=5V$                                                        | ---   | 9    | ---   | $ms$       |
| Over Current Protection Time             | $T_{OCP}$         | $V_{IN}=5V$                                                        | ---   | 64   | ---   | $ms$       |
| Thermal Shutdown                         | OT                | Rising temperature                                                 | ---   | 150  | ---   | $^\circ C$ |
|                                          | OT <sub>HYS</sub> | Hysteresis                                                         | ---   | 20   | ---   |            |

**Electrical Characteristics (G517B/C/D/E/F/G/H)**
 $V_{IN} = 5V$ ,  $C_{IN} = 1\mu F$ ,  $C_{OUT} = 1\mu F$ ,  $R_L = 10\Omega$ ,  $T_A = 25^\circ C$ .

 The device is not guaranteed to function outside its operating conditions. Parameters with MIN and/or MAX limits are 100% tested at  $+25^\circ C$ , unless otherwise specified.

| PARAMETER                                       | SYMBOL                | CONDITION                                                                                                                        |                     | MIN   | TYP | MAX | UNIT |
|-------------------------------------------------|-----------------------|----------------------------------------------------------------------------------------------------------------------------------|---------------------|-------|-----|-----|------|
| Input Voltage Rage                              | V <sub>IN</sub>       |                                                                                                                                  |                     | 2.7   | --- | 5.5 | V    |
| Quiescent Current                               | I <sub>Q</sub>        |                                                                                                                                  |                     | ---   | 130 | 190 | μA   |
| Off Supply Current                              | I <sub>Q(OFF)</sub>   | V <sub>IN</sub> =5.5V, EN( $\overline{EN}$ ) =Inactive                                                                           |                     | ---   | 0.1 | 1   | μA   |
| V <sub>IN</sub> Under Voltage Lockout           | V <sub>UVLO</sub>     |                                                                                                                                  |                     | 2.2   | 2.4 | 2.6 | V    |
| Output MOS R <sub>DS(ON)</sub>                  | R <sub>DS(ON)</sub>   | G517B, I <sub>OUT</sub> =0.1A<br>G517C, I <sub>OUT</sub> =0.3A<br>G517D, I <sub>OUT</sub> =0.8A<br>G517E, I <sub>OUT</sub> =1.3A | SOT-23-5            | ---   | 78  | 85  | mΩ   |
|                                                 |                       |                                                                                                                                  | WDFN2x2-6           | ---   | 70  | 85  |      |
|                                                 |                       | G517F, I <sub>OUT</sub> =2.0A<br>G517G, I <sub>OUT</sub> =2.9A<br>G517H, I <sub>OUT</sub> =2.5A                                  | SOT-23-5            | ---   | 66  | 75  |      |
|                                                 |                       |                                                                                                                                  | WDFN2x2-6           | ---   | 64  | 76  |      |
|                                                 |                       |                                                                                                                                  | MSOP-8              | ---   | 56  | 68  |      |
|                                                 |                       |                                                                                                                                  | TSOT-23-5/6 FC      | ---   | 40  | 50  |      |
|                                                 |                       | Over Current Trigger Point                                                                                                       | I <sub>LIM</sub>    | G517B | 0.3 | 0.4 |      |
| G517C                                           | 0.6                   |                                                                                                                                  |                     | 0.8   | 1.0 |     |      |
| G517D                                           | 1.1                   |                                                                                                                                  |                     | 1.3   | 1.5 |     |      |
| G517E                                           | 1.6                   |                                                                                                                                  |                     | 1.8   | 2.0 |     |      |
| G517F                                           | 2.2                   |                                                                                                                                  |                     | 2.5   | 2.8 |     |      |
| G517G                                           | 3.1                   |                                                                                                                                  |                     | 3.4   | 4.0 |     |      |
| G517H                                           | 2.7                   |                                                                                                                                  |                     | 3.2   | 3.9 |     |      |
| Short-Circuit Fold-Back Current                 | I <sub>SFB</sub>      | G517B, V <sub>IN</sub> >3.5V and V <sub>OUT</sub> <1V                                                                            | ---                 | 0.3   | --- | A   |      |
|                                                 |                       | G517C, V <sub>IN</sub> >3.5V and V <sub>OUT</sub> <1V                                                                            | ---                 | 0.5   | --- |     |      |
|                                                 |                       | G517D, V <sub>IN</sub> >3.5V and V <sub>OUT</sub> <1V                                                                            | ---                 | 0.8   | --- |     |      |
|                                                 |                       | G517E, V <sub>IN</sub> >3.5V and V <sub>OUT</sub> <1V                                                                            | ---                 | 1.2   | --- |     |      |
|                                                 |                       | G517F, V <sub>IN</sub> >3.5V and V <sub>OUT</sub> <1V                                                                            | ---                 | 1.7   | --- |     |      |
|                                                 |                       | G517G, V <sub>IN</sub> >3.5V and V <sub>OUT</sub> <1V                                                                            | ---                 | 2.3   | --- |     |      |
|                                                 |                       | G517H, V <sub>IN</sub> >3.5V and V <sub>OUT</sub> <1V                                                                            |                     | 2.1   |     |     |      |
| EN Input Threshold-High VIH                     | V <sub>EN(H)</sub>    |                                                                                                                                  |                     | 1.2   | --- | --- | V    |
| EN Input Threshold-Low VIL                      | V <sub>EN(L)</sub>    |                                                                                                                                  |                     | ---   | --- | 0.6 | V    |
| Output Turn-on Rising Time                      | Tr                    | R <sub>LOAD</sub> =10Ω, C <sub>OUT</sub> =10μF,<br>90% Settling                                                                  | V <sub>IN</sub> =5V | 1     | 1.5 | 3   | ms   |
|                                                 | V <sub>IN</sub> =3.3V |                                                                                                                                  | 1.5                 | 2.4   | 3   |     |      |
| FLAG Deglitch                                   | T <sub>FLAG</sub>     | FLAG assertion or deassertion                                                                                                    |                     | 4     | 9   | 15  | ms   |
| Shutdown OUT Pull Low Resistance                |                       | G517X1/2, X=B, C, D, E, F, G, H                                                                                                  |                     | ---   | 150 | 225 | Ω    |
| t <sub>IOS</sub> Response Time to Short Circuit | t <sub>IOS</sub>      | V <sub>IN</sub> =5V, see figure 1,2                                                                                              |                     | ---   | 1.5 | --- | μs   |
| Output Leakage Current                          |                       | EN="0", V <sub>OUT</sub> =5V                                                                                                     |                     | ---   | 0.5 | 1   | μA   |
| Output Reverse-Current threshold                |                       | G517B/C/D/E                                                                                                                      |                     | 0.2   | 0.8 | --- | A    |
|                                                 |                       | G517F/G/H                                                                                                                        |                     | 0.05  | 0.4 | --- |      |
| Output Reverse-Current Deglitch Time            |                       | V <sub>IN</sub> =5V                                                                                                              |                     | ---   | 5   | --- | ms   |
| Thermal Limit                                   | OT                    |                                                                                                                                  |                     | ---   | 140 | --- | °C   |
| Thermal Limit Hysteresis                        | OT <sub>HYS</sub>     |                                                                                                                                  |                     | ---   | 20  | --- | °C   |

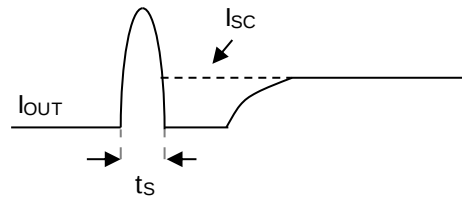


Figure 1

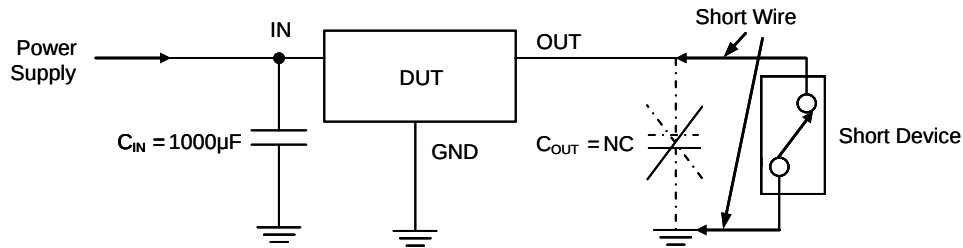


Figure 2


**Note:**

To exactly identify the short circuit characteristic of IC, avoid the test result interfered by parasitic inductor, output capacitor, and contact resistor. It is necessary to follow the recommendation as follows.

Please,







1. Add 1000μF of capacitor between  $V_{IN}$  and GND, and close to IC.
2. Remove output capacitor.
3. Shorter the short circuit device wire.
4. Measure output current ( $I_{OUT}$ ).

**Minimum Footprint PCB Layout Section**






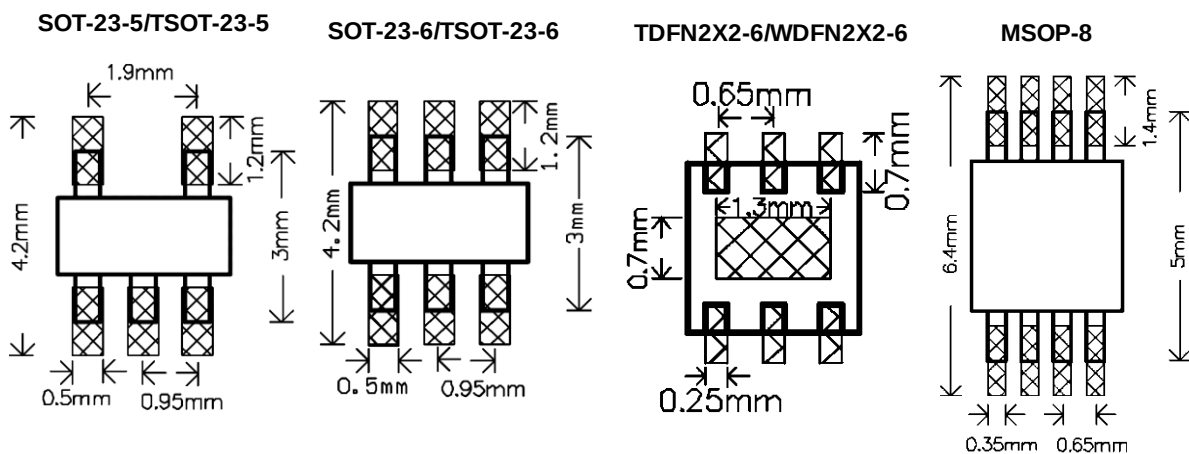


## Typical Performance Characteristics


G517AH,  $V_{IN}=5V$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ ,  $T_A=25^\circ C$ , unless otherwise noted.

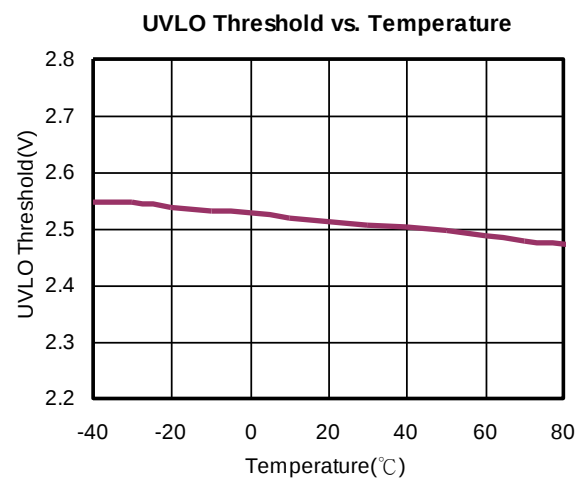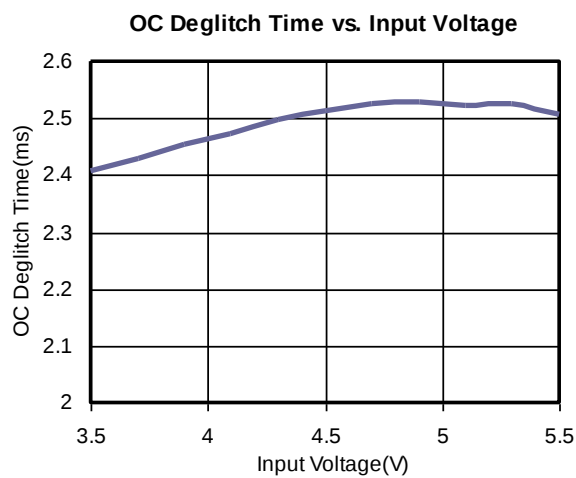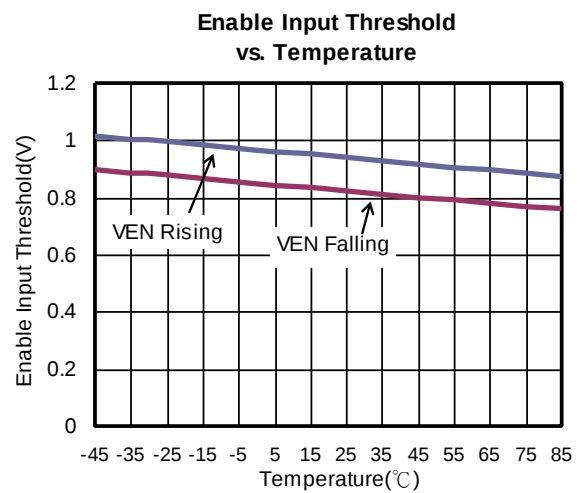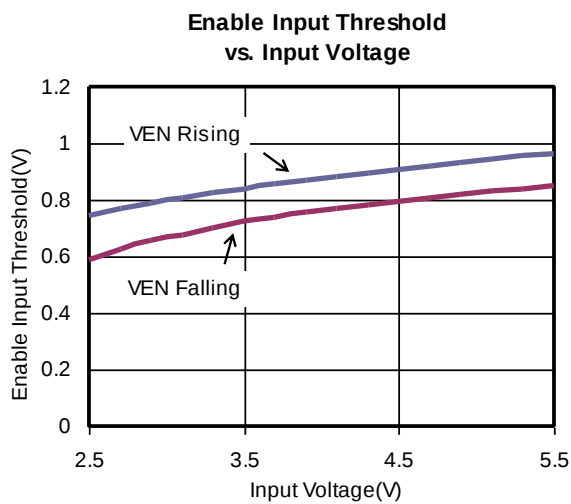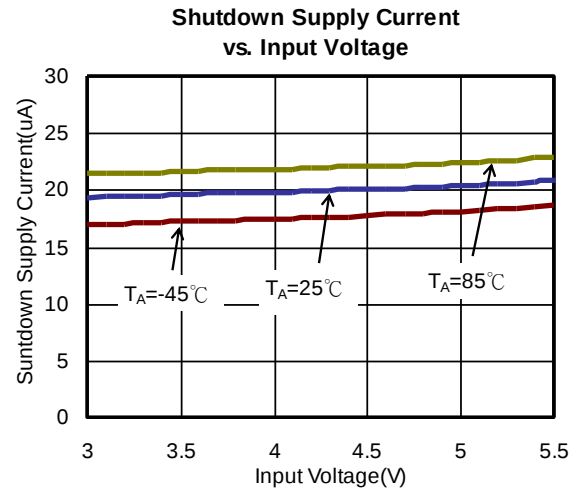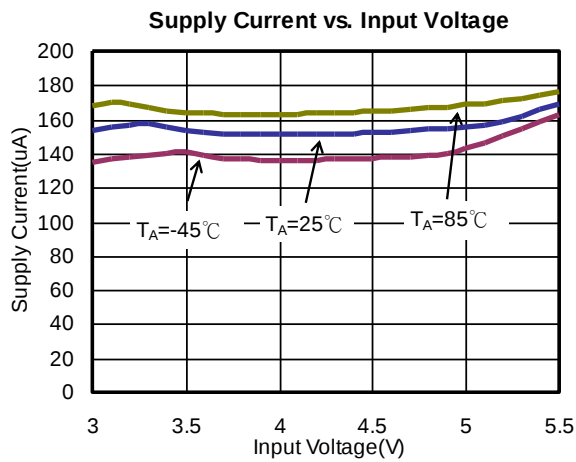

Typical Performance Characteristics (Continued)

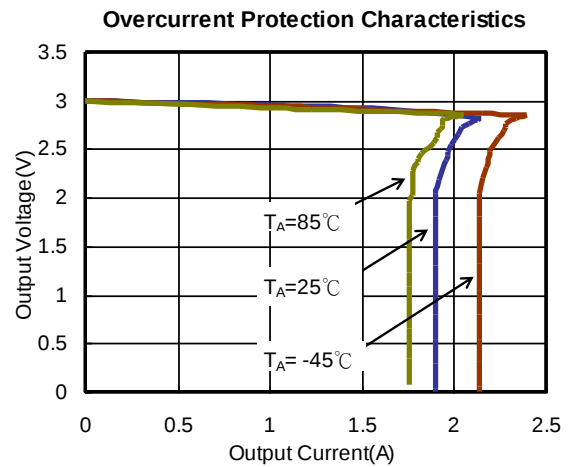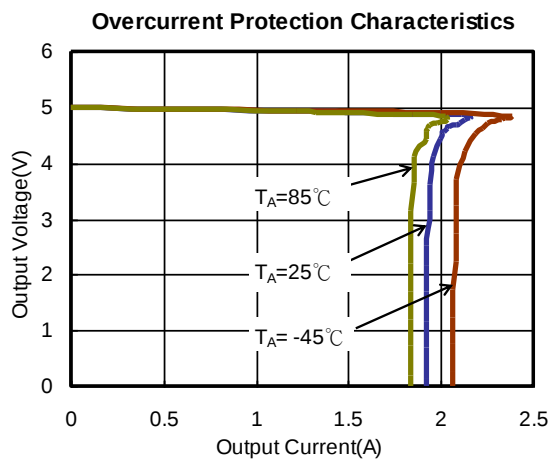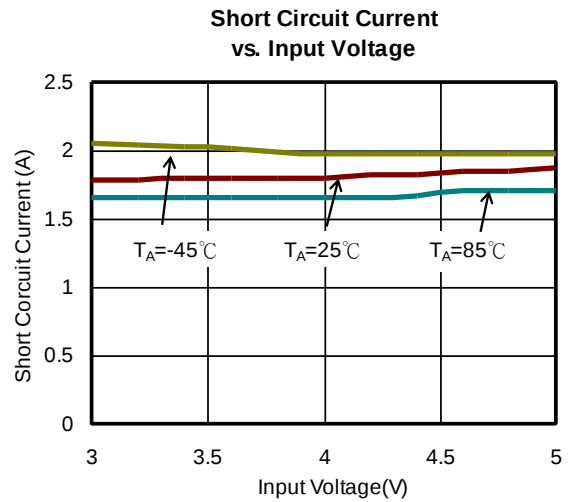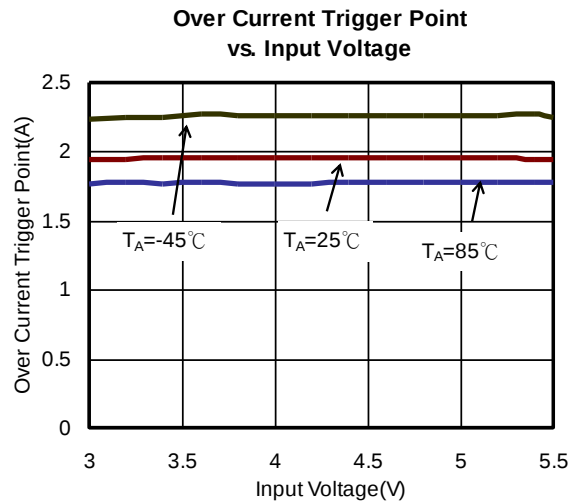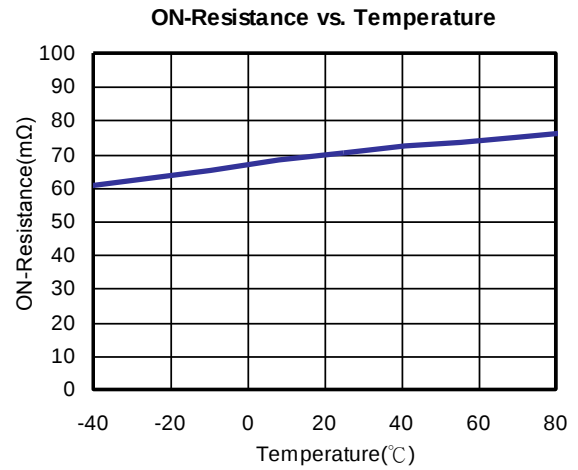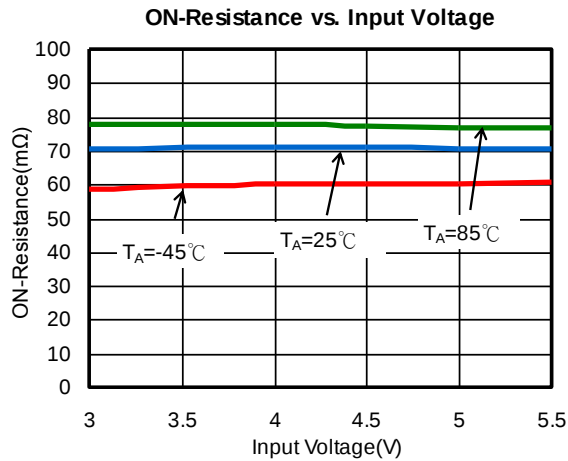


Typical Performance Characteristics (Continued)

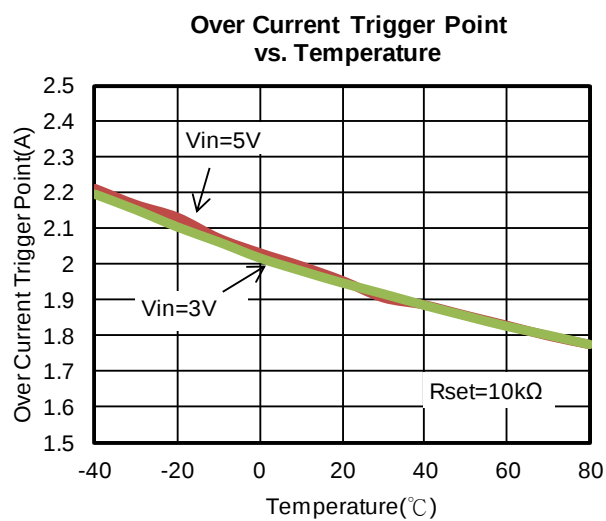


Typical Performance Characteristics (Continued)


Turn on Delay Time and Rise Time

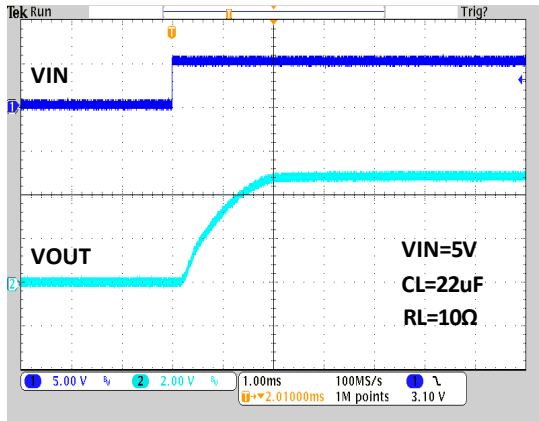


Turn off Delay Time and Fall Time

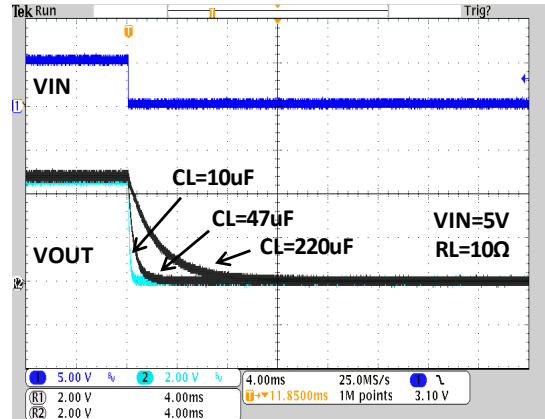


Inrush Current with Load Capacitance

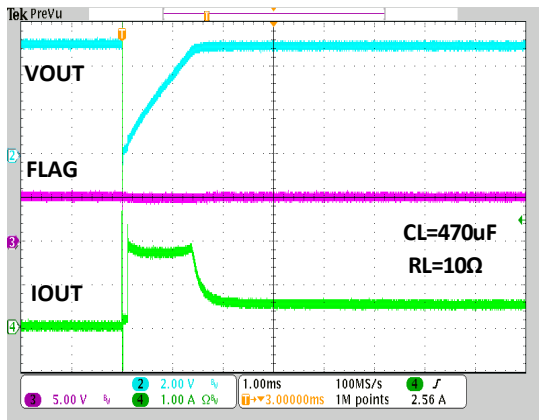


Over Current Protection

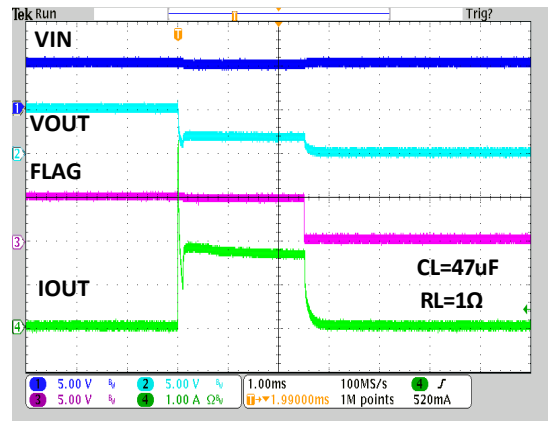

UVLO Protection at Rising

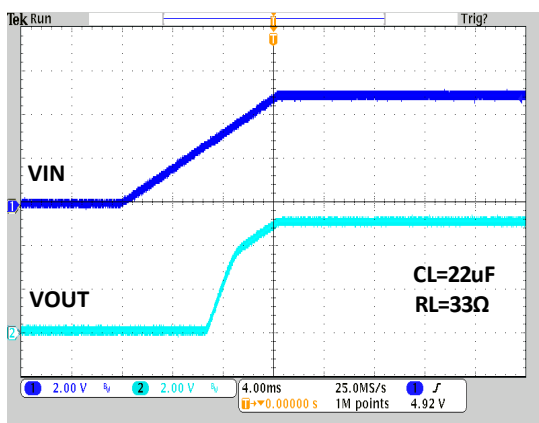


UVLO Protection at Falling

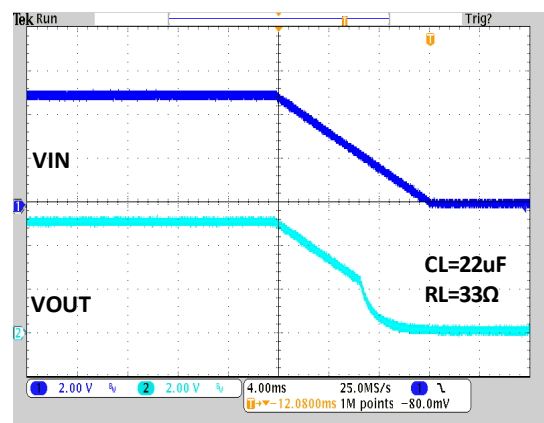


Typical Performance Characteristics (Continued)


Inrush Short Circuit Response

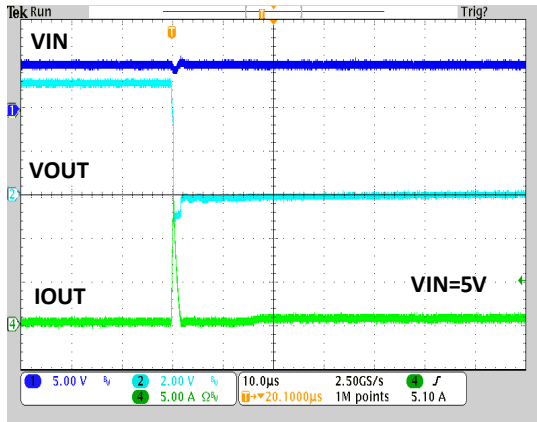


Resistance Load Inrush Response

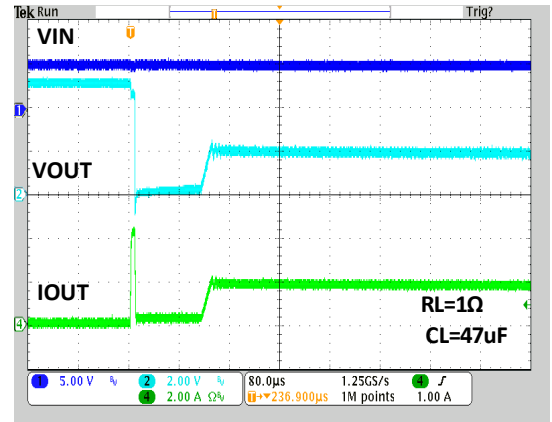


Short-Circuit Current, Device Enable into Short

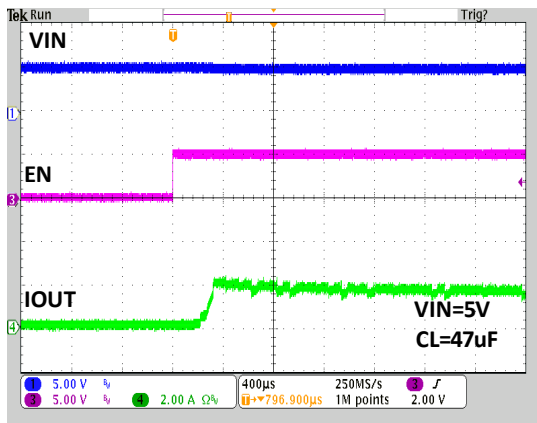


Short Circuit Response at Start up

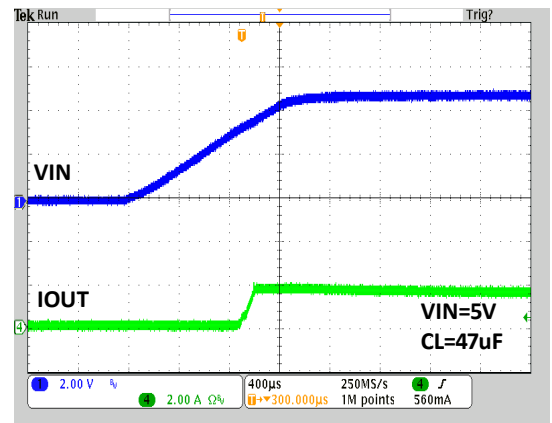

Capacitance Load Inrush Response

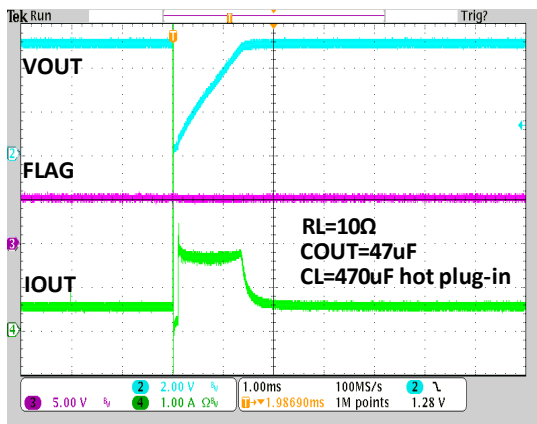


Capacitance Load Inrush Response

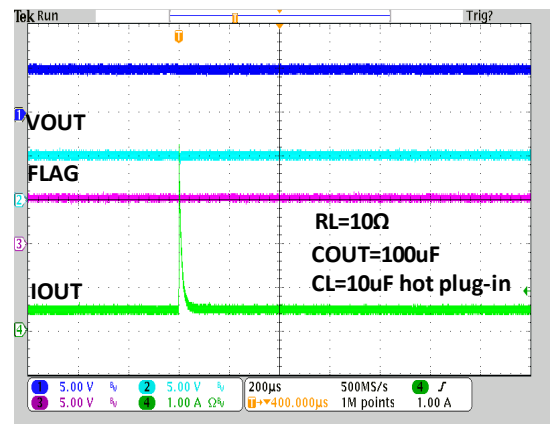


Typical Performance Characteristics (Continued)

Reverse-Current Protection Response

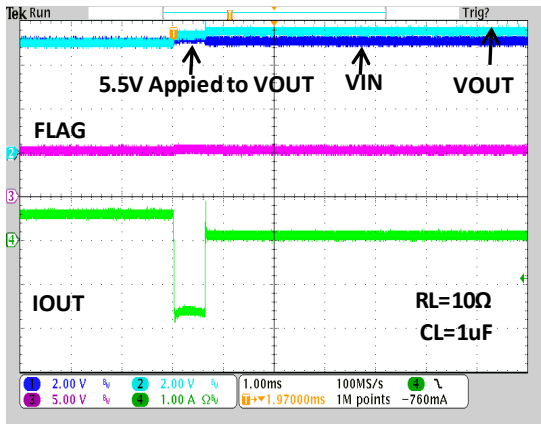


Reverse-Current Protection Recovery

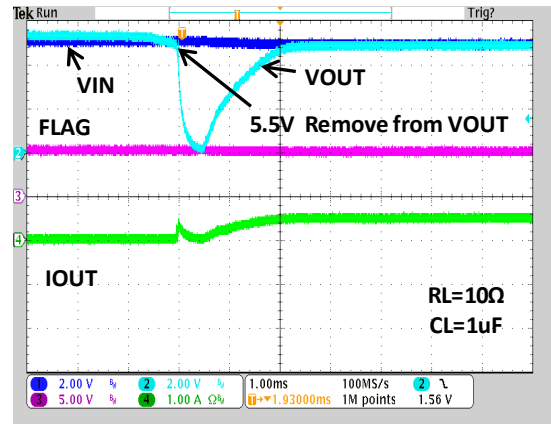


## Typical Performance Characteristics

G517AL,  $V_{IN}=5V$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ ,  $T_A=25^\circ C$ , unless otherwise noted.)


Supply Current vs. Input Voltage

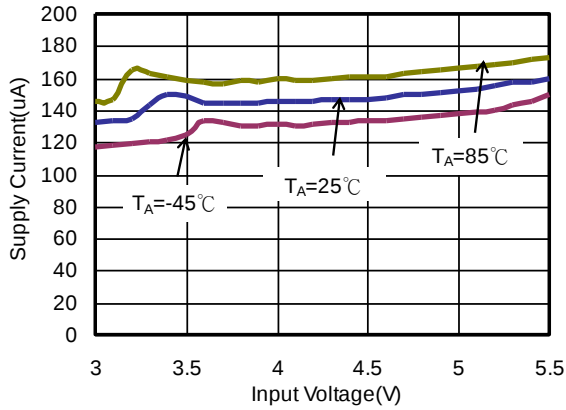


Shutdown Supply Current vs. Input Voltage

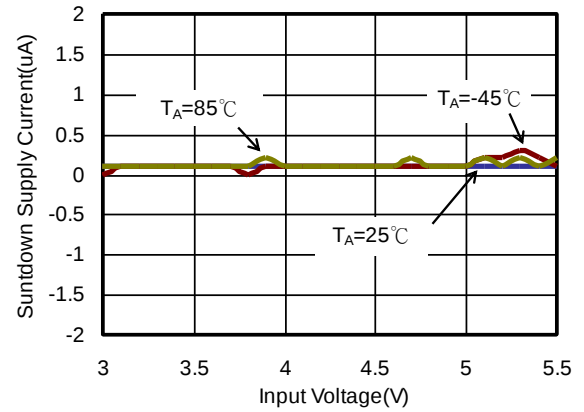


Enable Input Threshold vs. Input Voltage

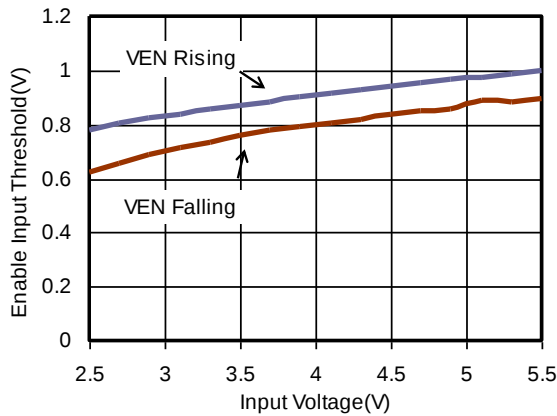


Enable Input Threshold vs. Temperature

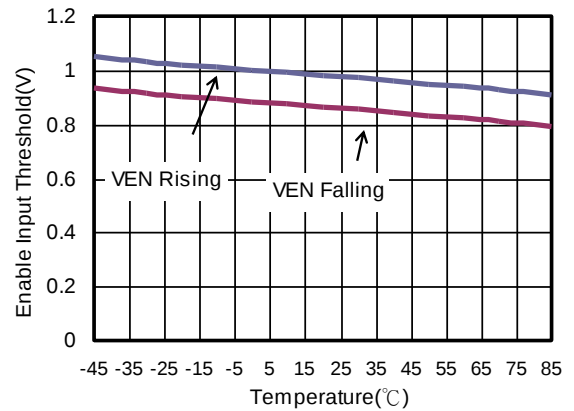







OC Deglitch Time vs. Input Voltage

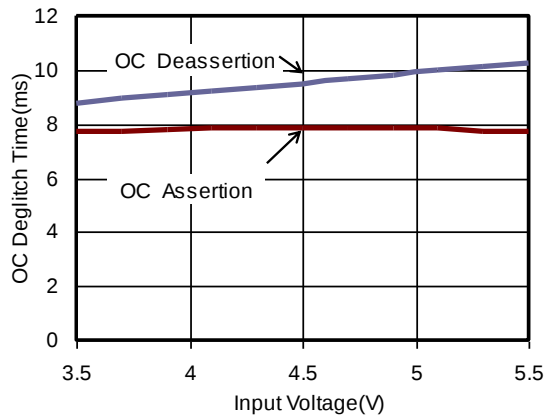

UVLO Threshold vs. Temperature

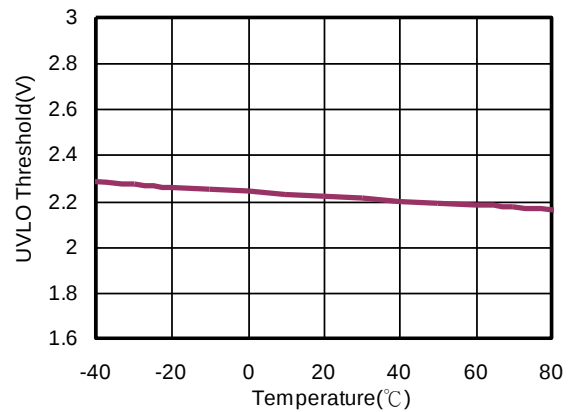


Typical Performance Characteristics (Continued)

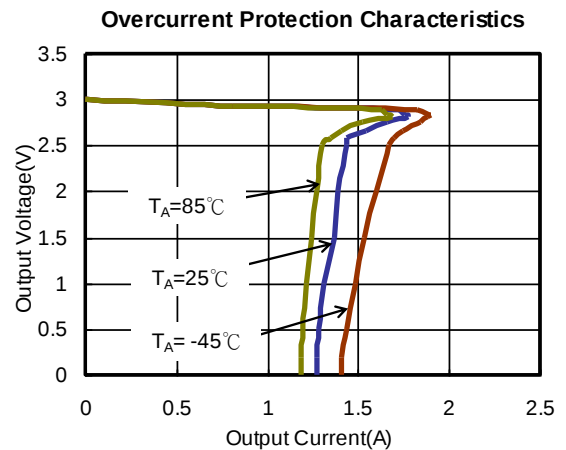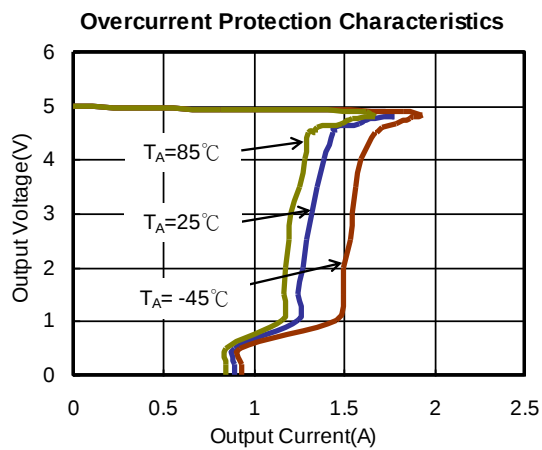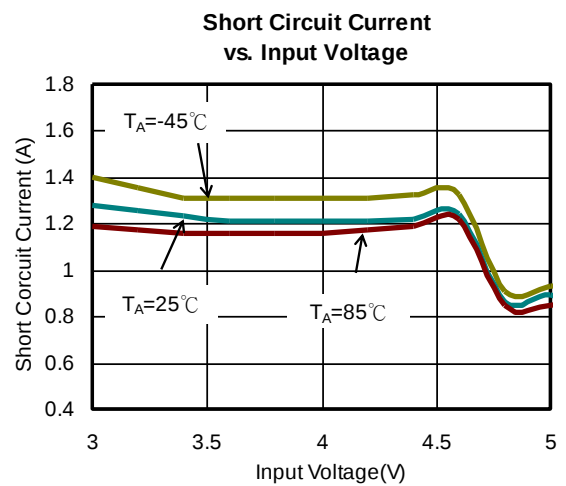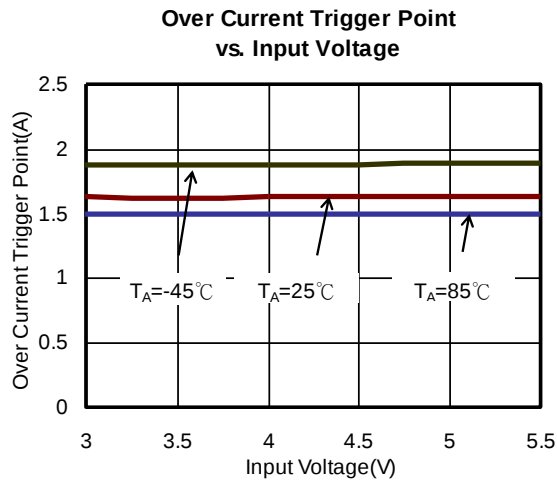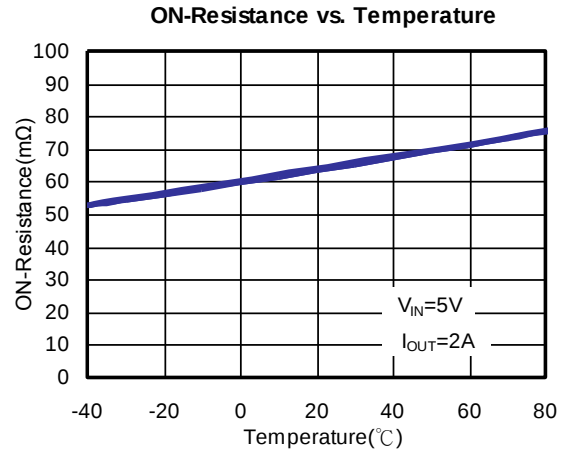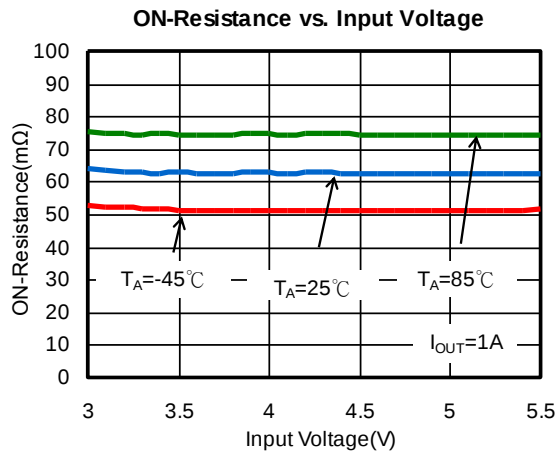


Typical Performance Characteristics (Continued)


Turn on Delay Time and Rise Time

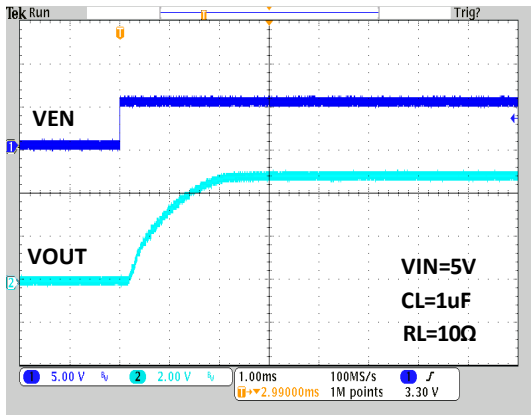


Turn off Delay Time and Fall Time

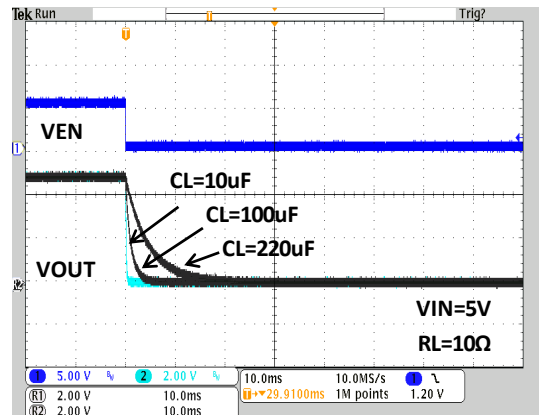


Inrush Current with Load Capacitance

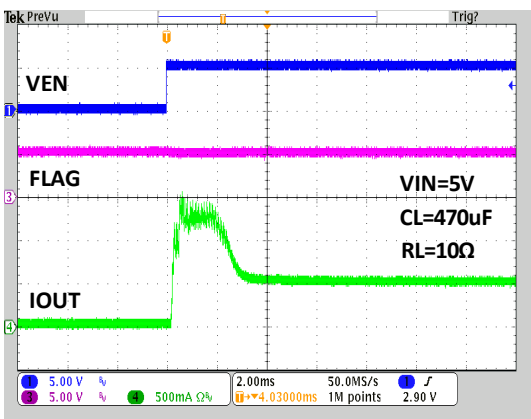


Thermal shutdown Response

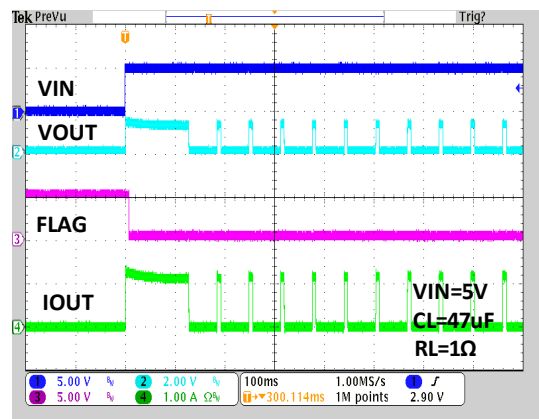

UVLO Protection at Rising

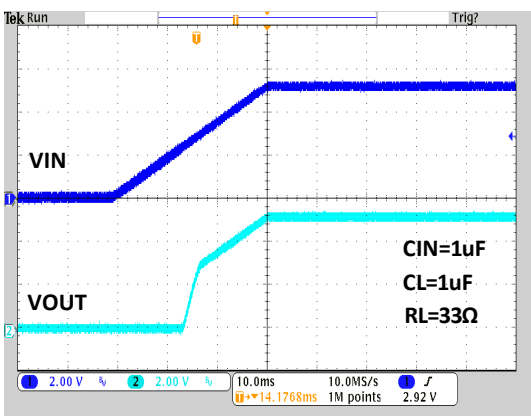


UVLO Protection at Falling

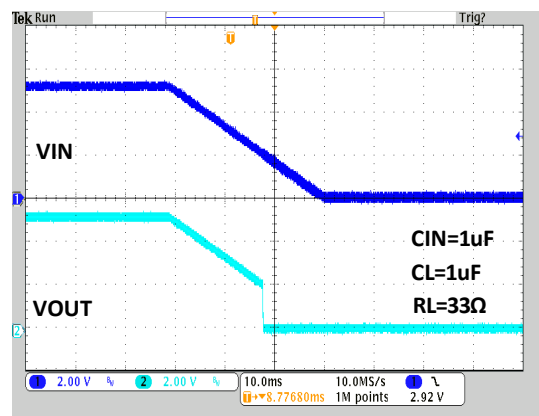


Typical Performance Characteristics (Continued)


Inrush Short Circuit Response

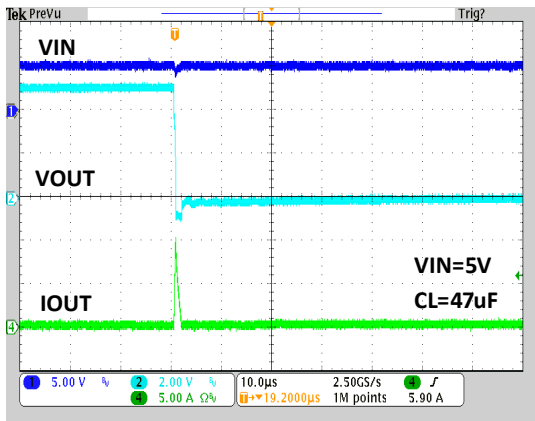


Resistance Load Inrush Response

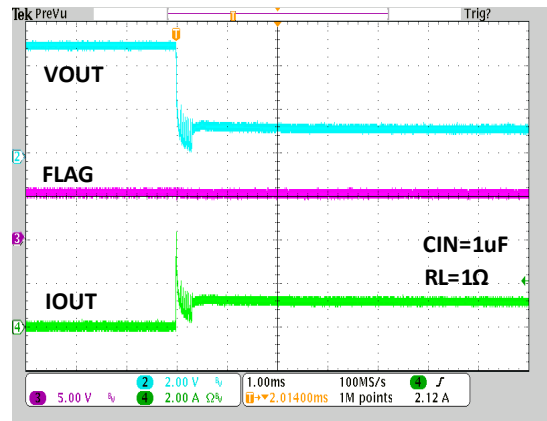


Short-Circuit Current, Device Enable into Short

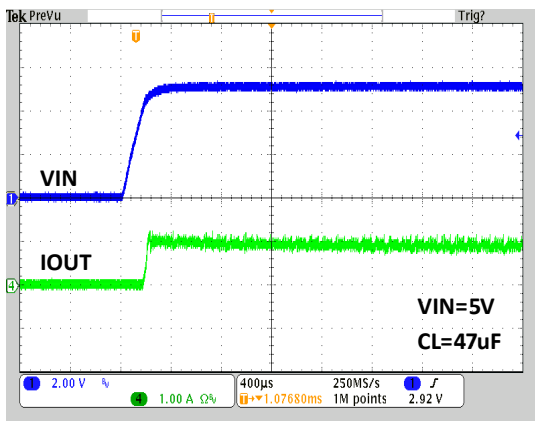


Short Circuit Response at Start up

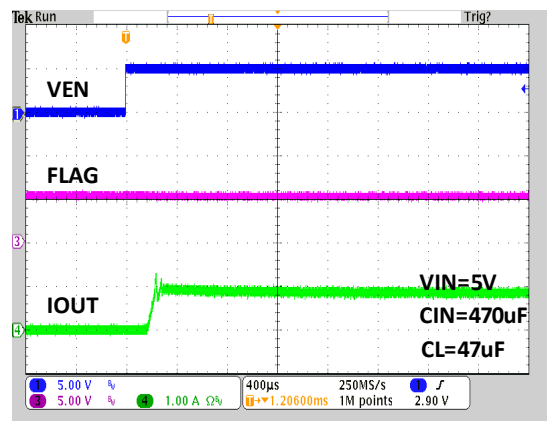

Reverse-Current Protection Response

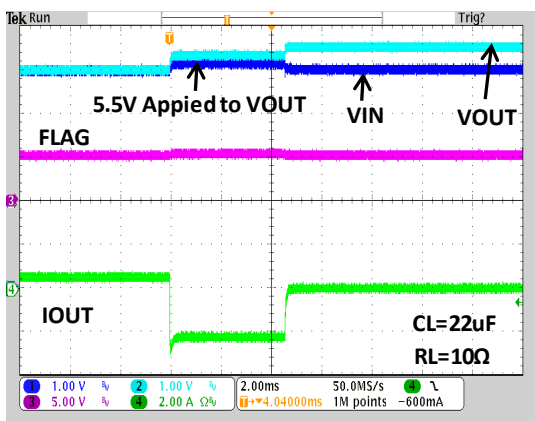


Reverse-Current Protection Recovery

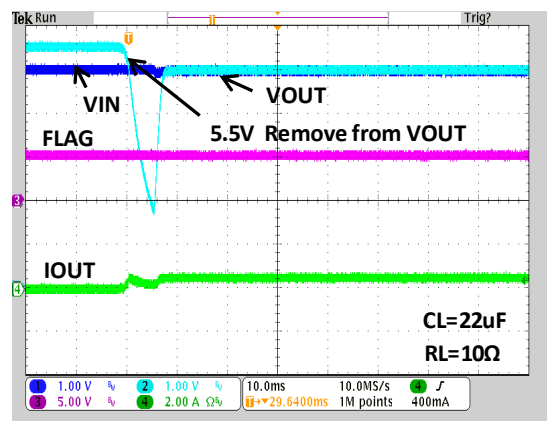


**Typical Performance Characteristics (Continued)**

G517G,  $V_{IN}=5V$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ ,  $T_A=25^\circ C$ , unless otherwise noted.


**Supply Current vs. Input Voltage**

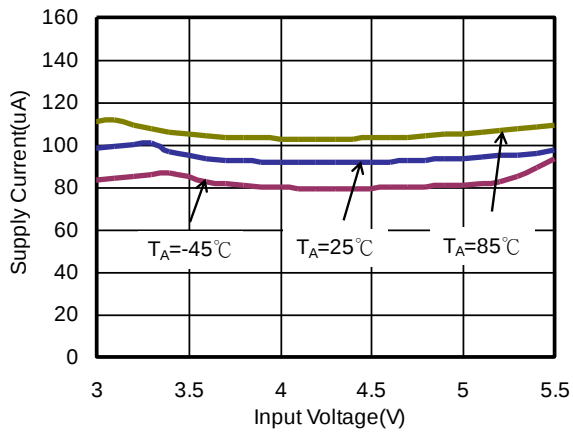


**Shutdown Supply Current vs. Input Voltage**

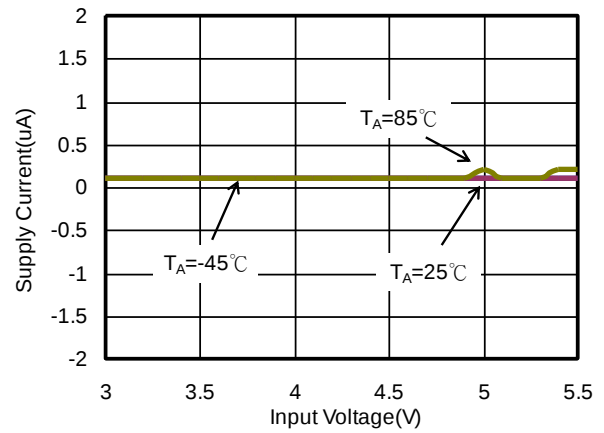


**Enable Input Threshold vs. Input Voltage**

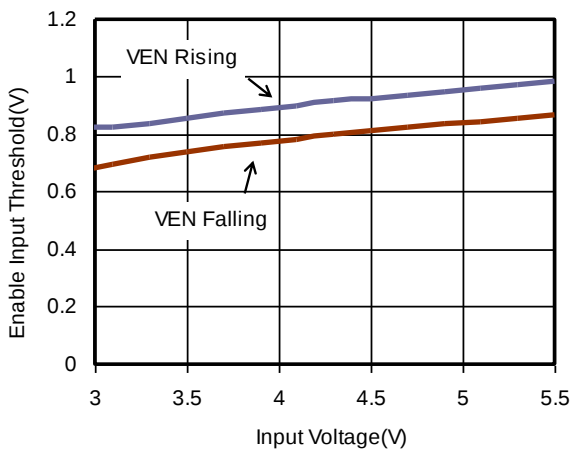


**Enable Input Threshold vs. Temperature**

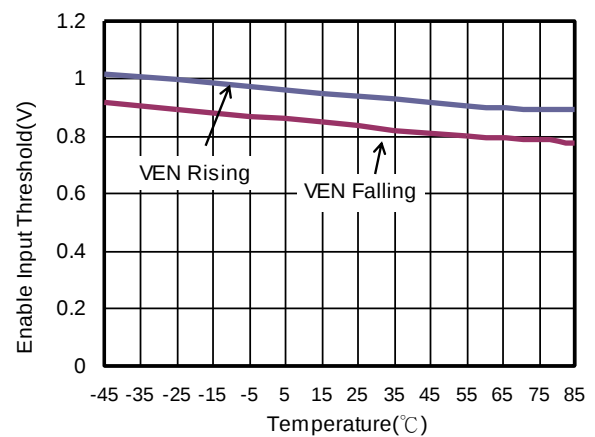







**OC Deglitch Time vs. Input Voltage**

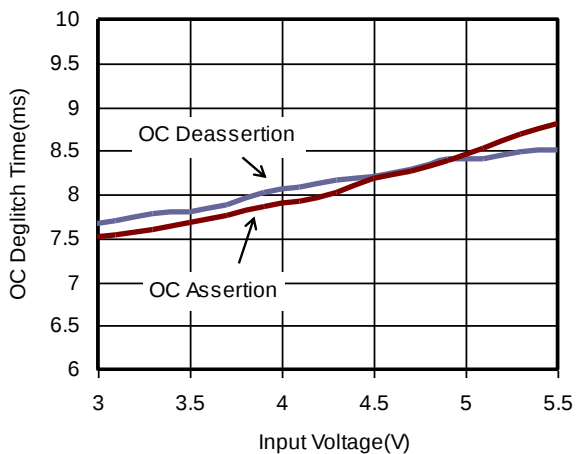

**UVLO Threshold vs. Temperature**

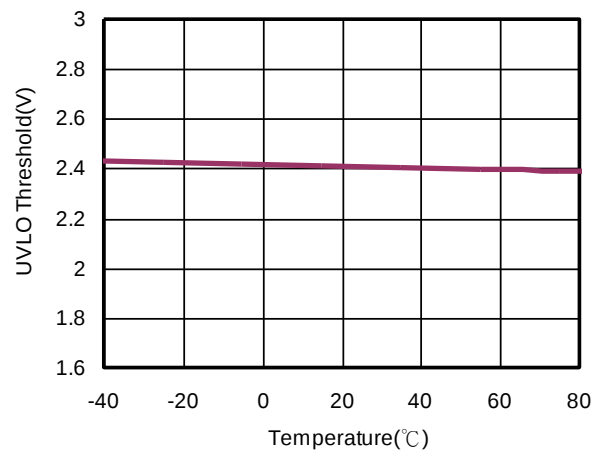


Typical Performance Characteristics (Continued)

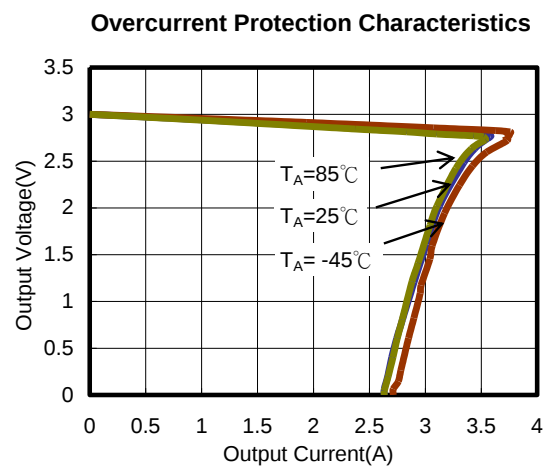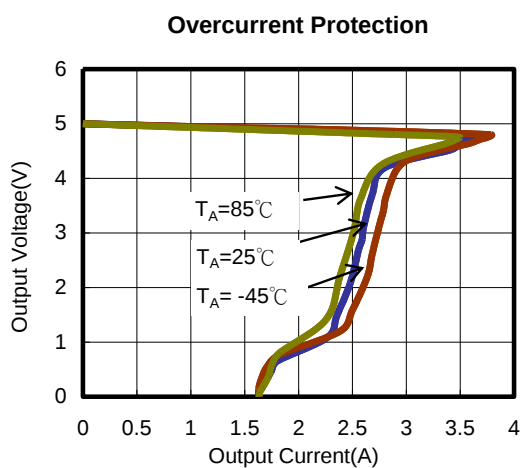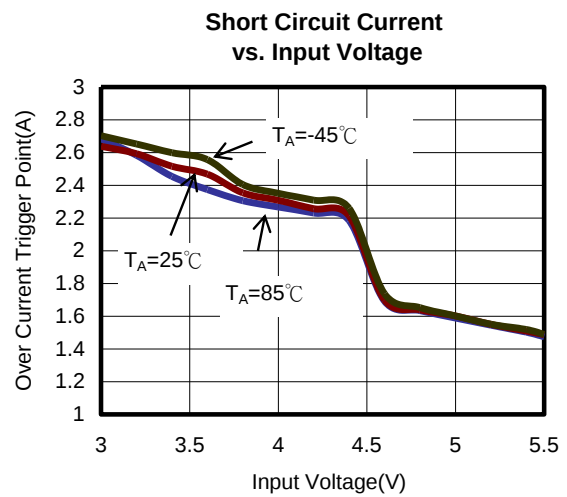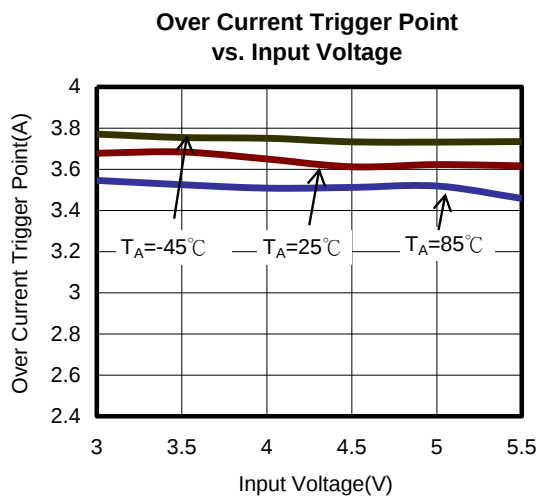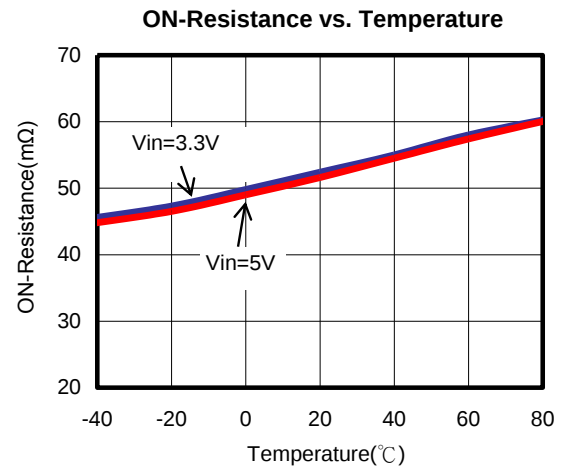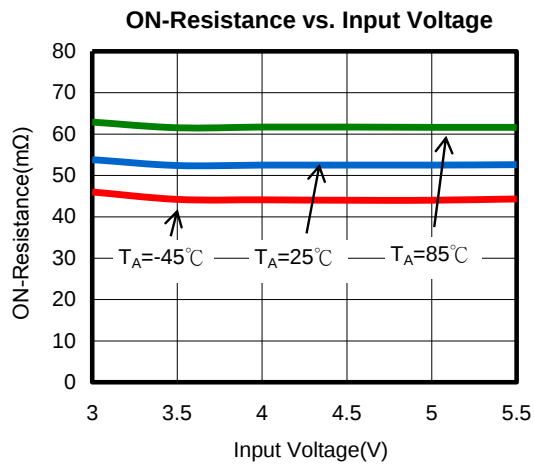


Typical Performance Characteristics (Continued)


Turn on Delay Time and Rise Time

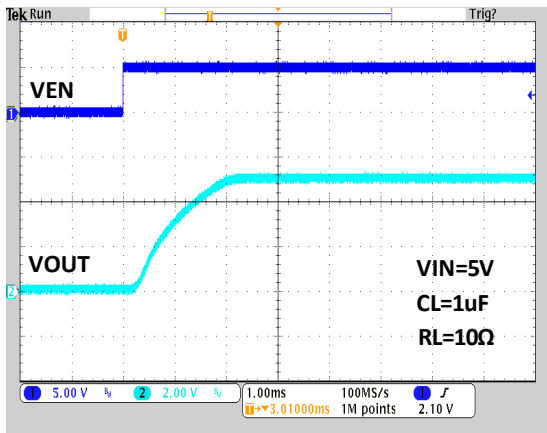


Turn off Delay Time and Fall Time

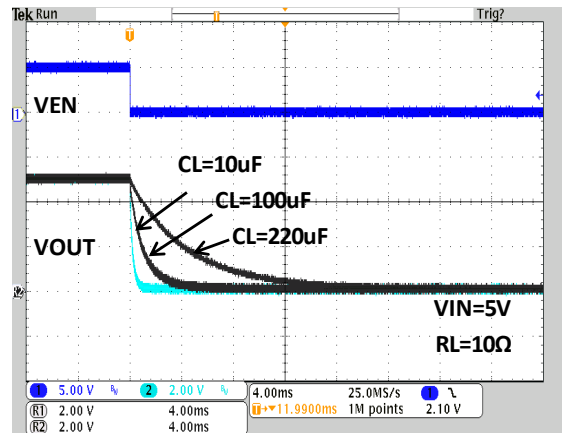


Inrush Current with Load Capacitance

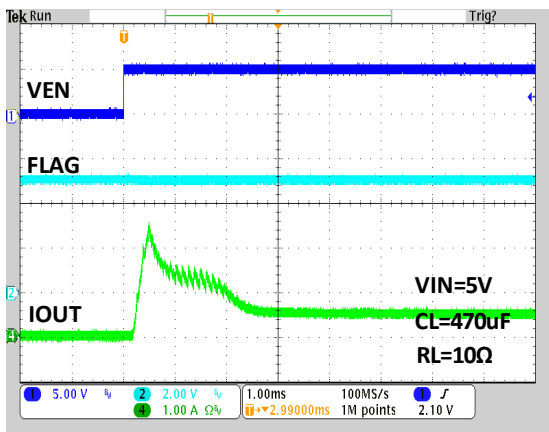


Thermal shutdown Response

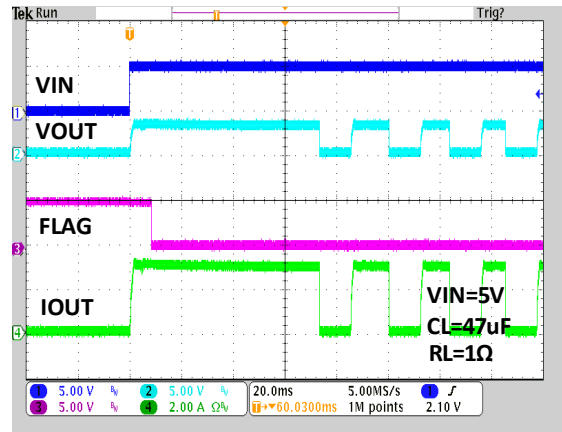

UVLO Protection at Rising

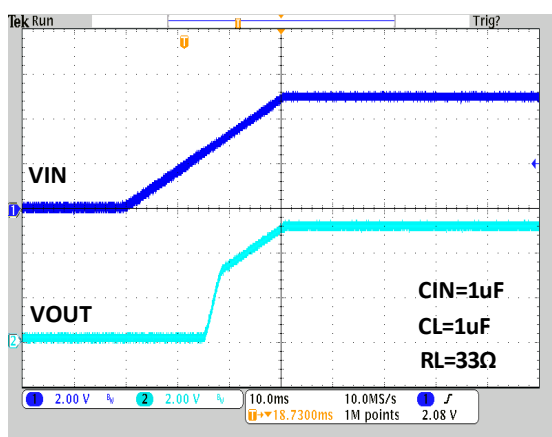


UVLO Protection at Falling

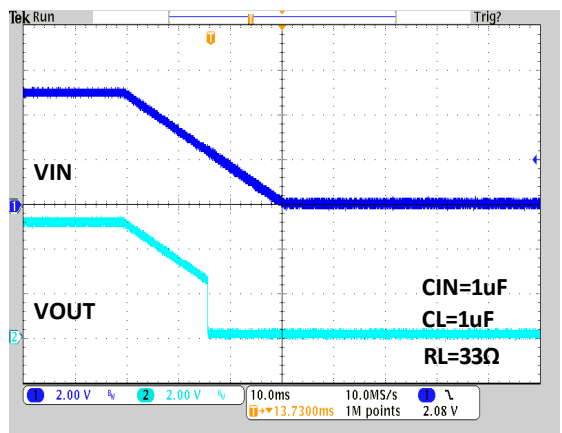


Typical Performance Characteristics (Continued)


Inrush Short Circuit Response

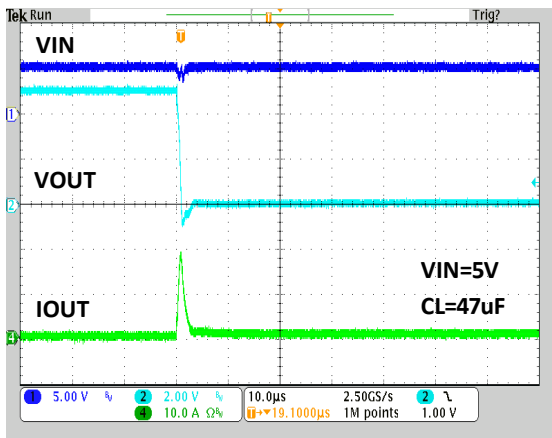


Resistance Load Inrush Response

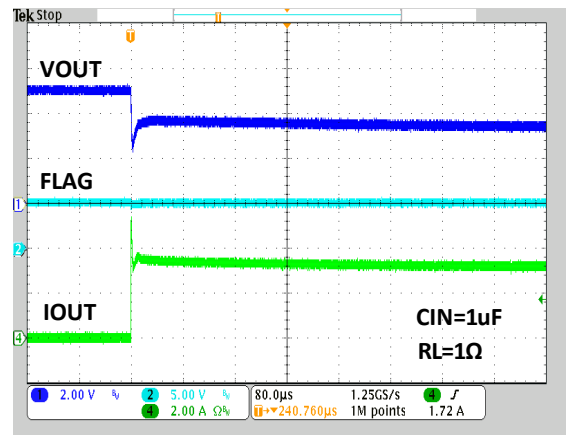


Short-Circuit Current, Device Enable into Short

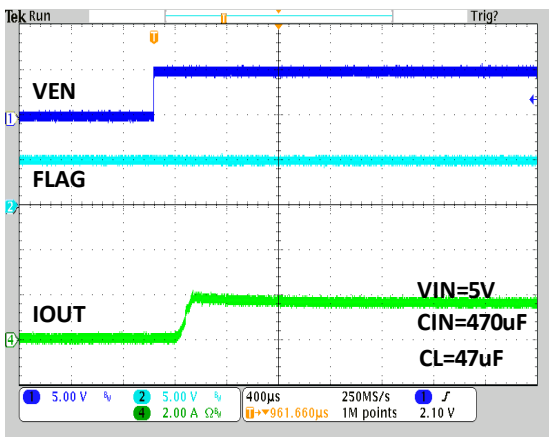


Short Circuit Response at Start up

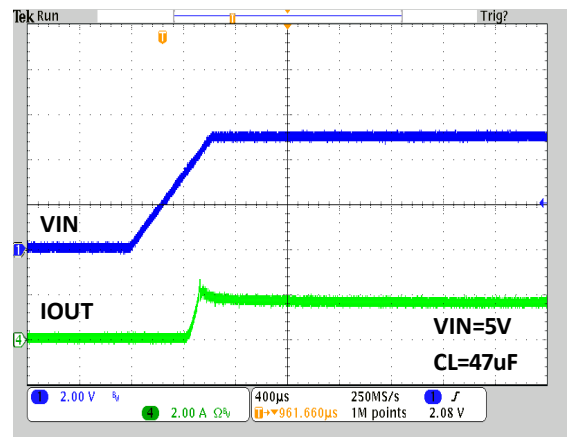

Capacitance Load Inrush Response

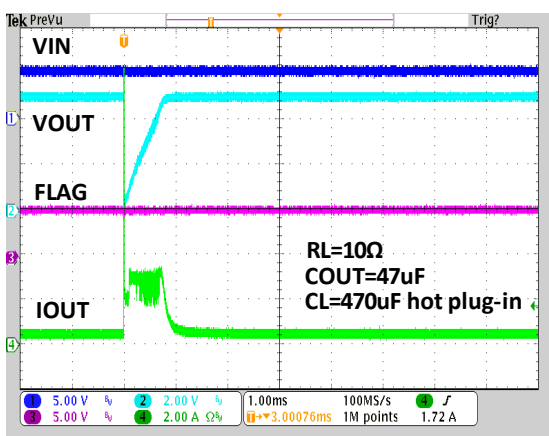


Capacitance Load Inrush Response

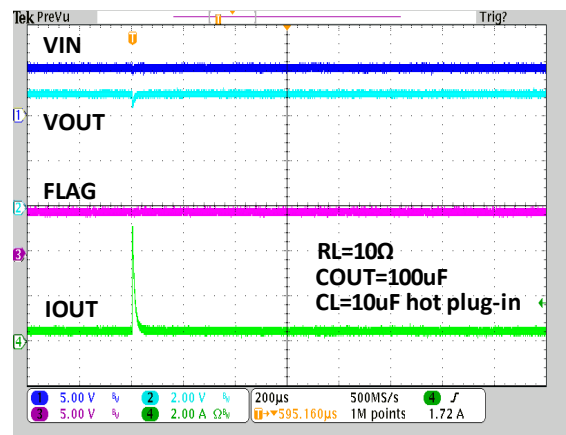


Typical Performance Characteristics (Continued)

Reverse-Current Protection Response

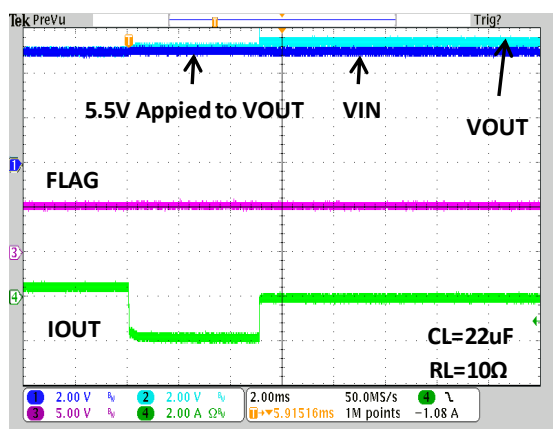


Reverse-Current Protection Recovery

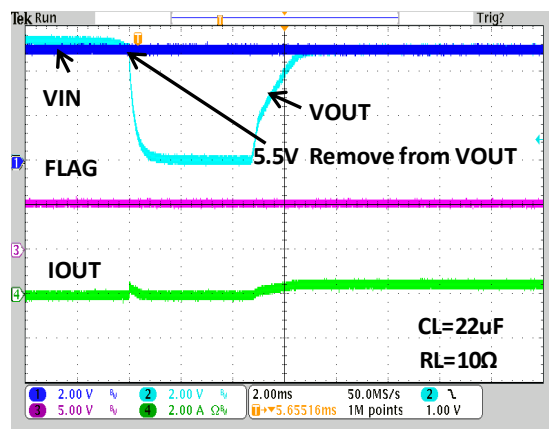


**Typical Performance Characteristics (Continued)**

G517\_FC,  $V_{IN}=5V$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ ,  $T_A=25^\circ C$ , unless otherwise noted.)


**Supply Current vs. Input Voltage**

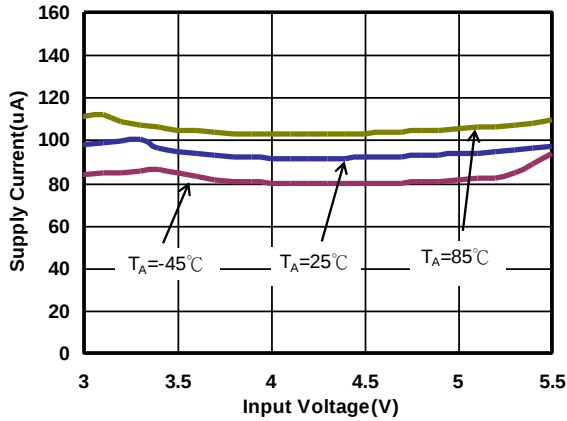


**Shutdown Supply Current vs. Input Voltage**

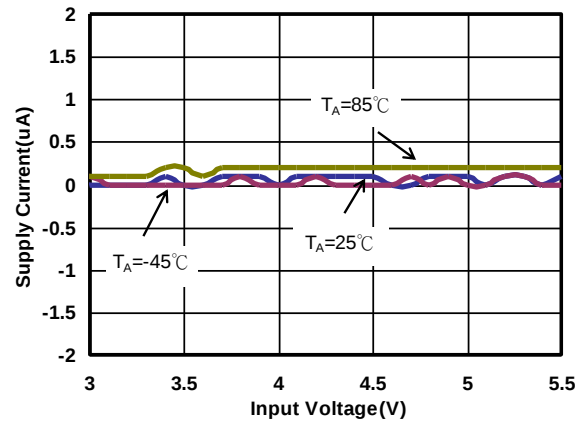


**Enable Input Threshold vs. Input Voltage**

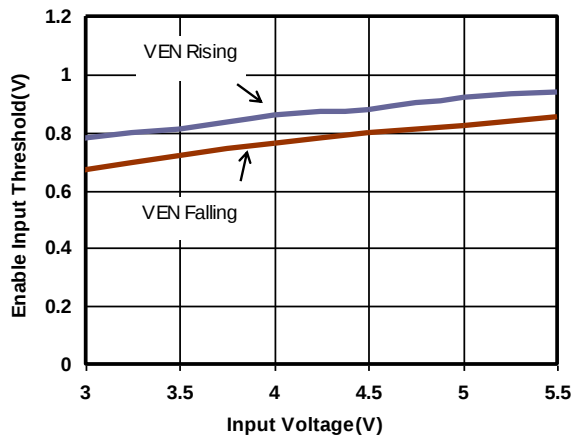


**Enable Input Threshold vs. Temperature**

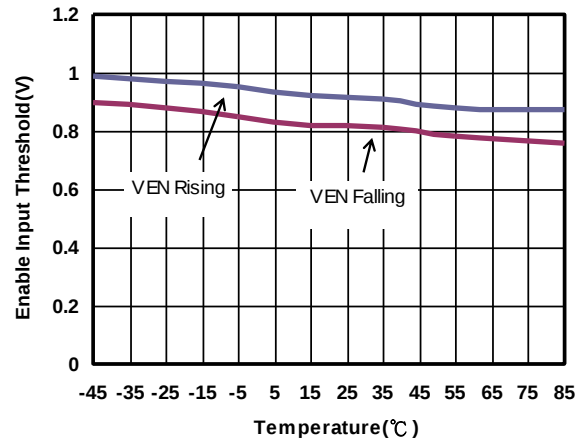







**OC Deglitch Time vs. Input Voltage**

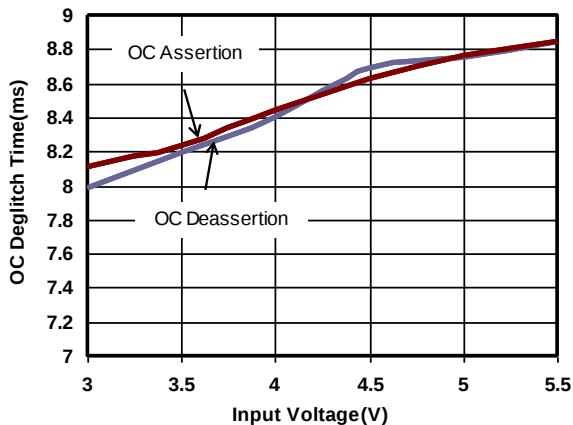

**UVLO Threshold vs. Temperature**

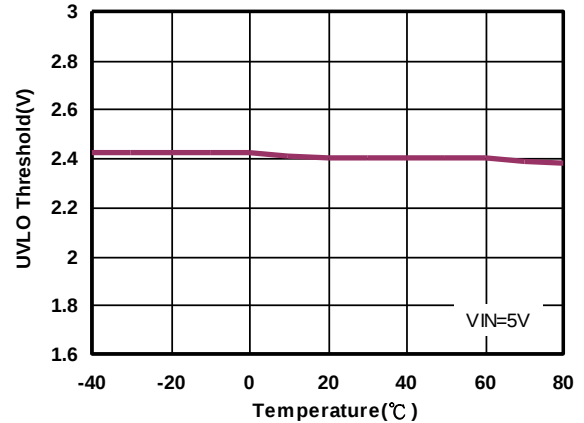


Typical Performance Characteristics (Continued)

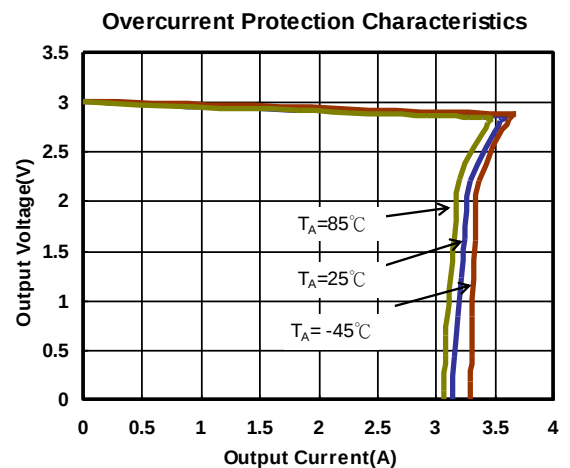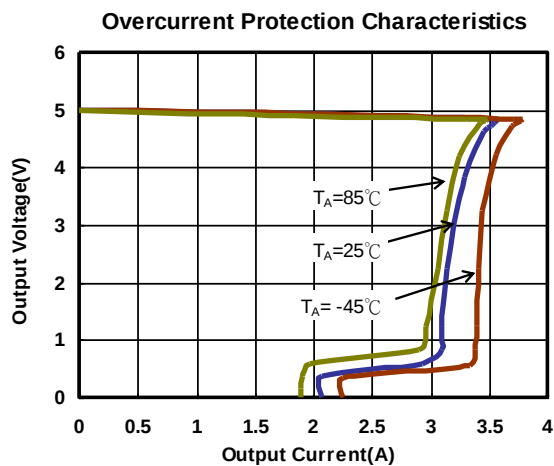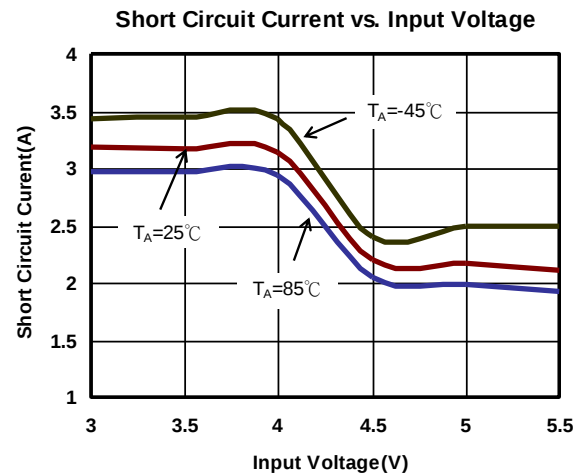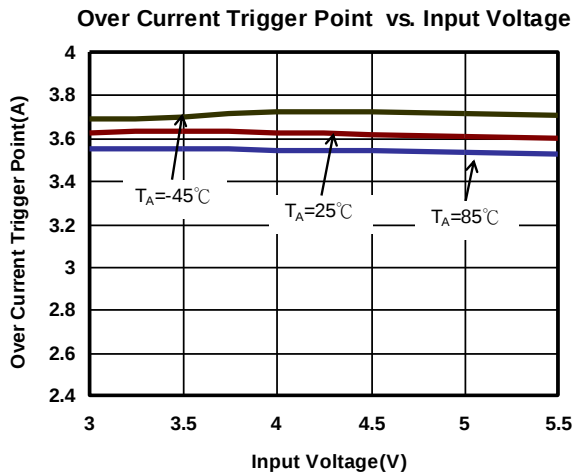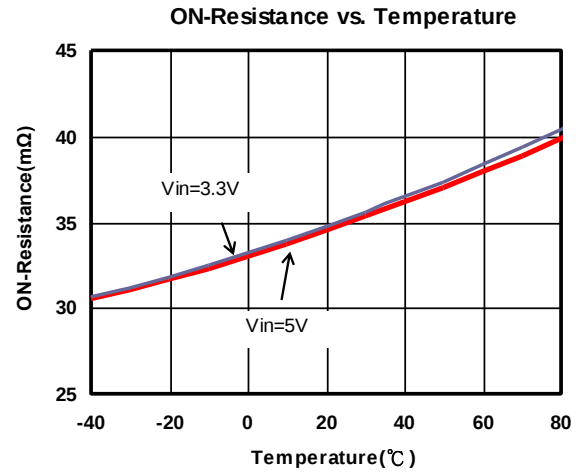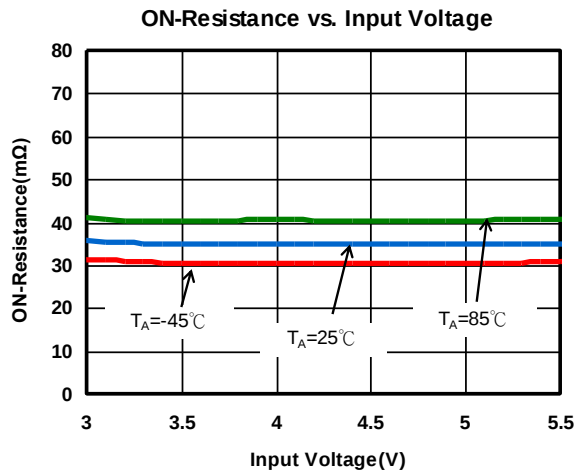


**Typical Performance Characteristics (Continued)**

G517\_FC,  $V_{IN}=5V$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ ,  $T_A=25^\circ C$ , unless otherwise noted.)


**Turn on Delay Time and Rise Time**

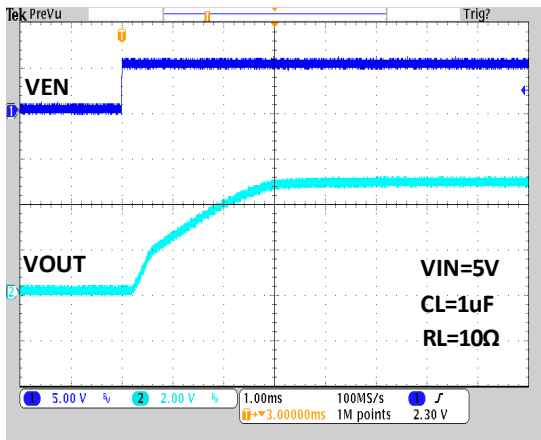


**Turn off Delay Time and Fall Time**

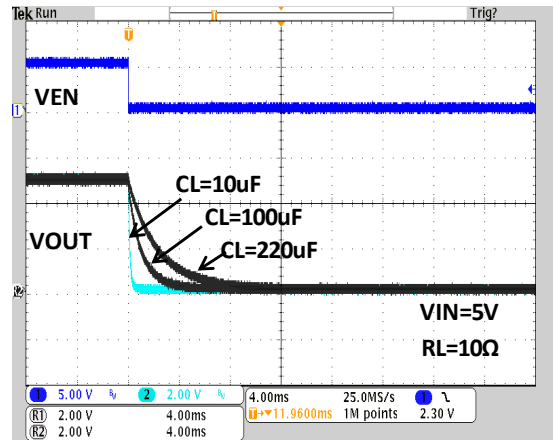


**Inrush Current with Load Capacitance**

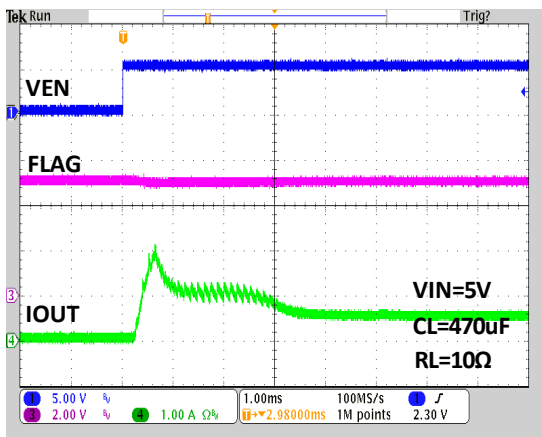


**Thermal shutdown Response**

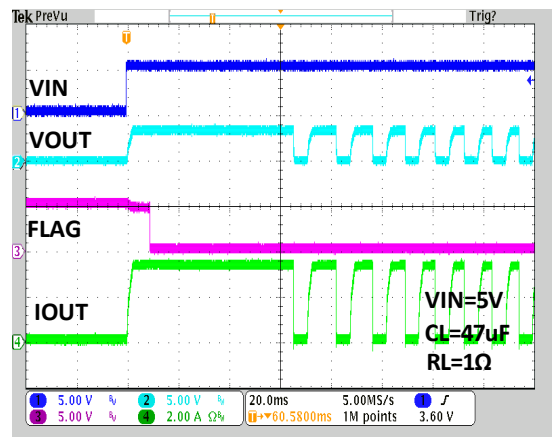

**UVLO Protection at Rising**

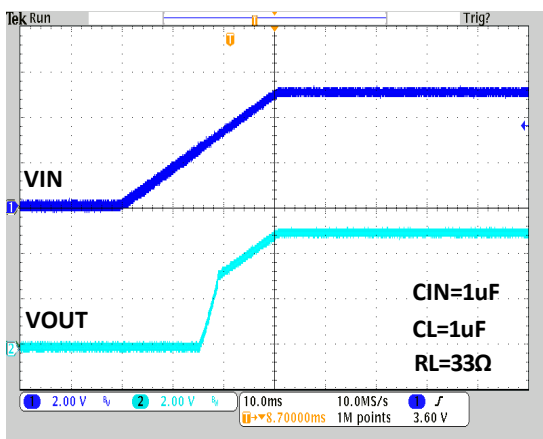


**UVLO Protection at Falling**

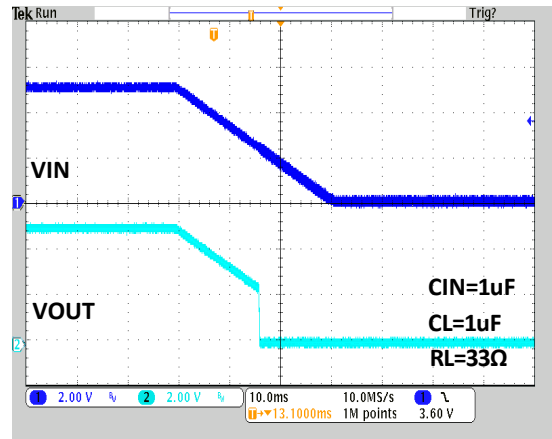


Typical Performance Characteristics (Continued)


Inrush Short Circuit Response

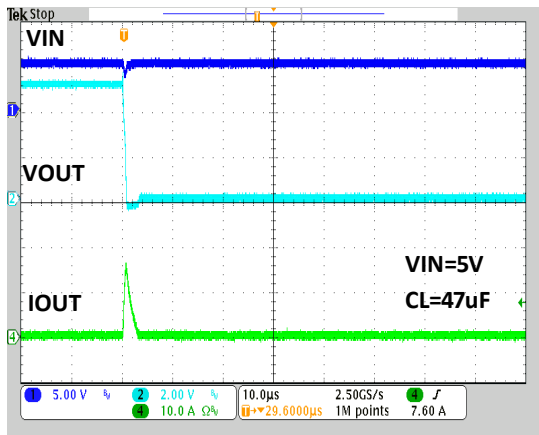


Resistance Load Inrush Response

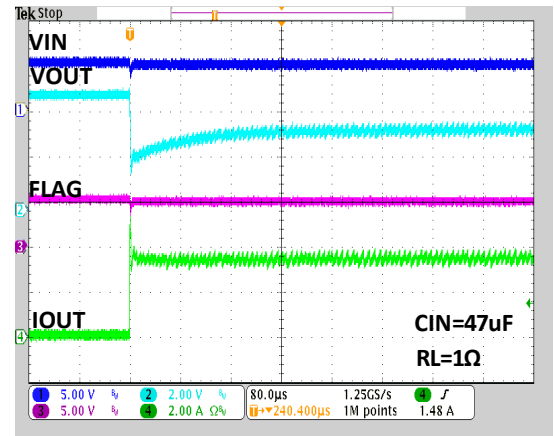


Short-Circuit Current, Device Enable into Short

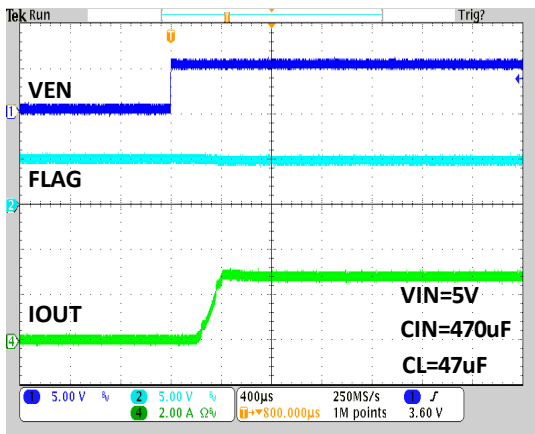


Short Circuit Response at Start up

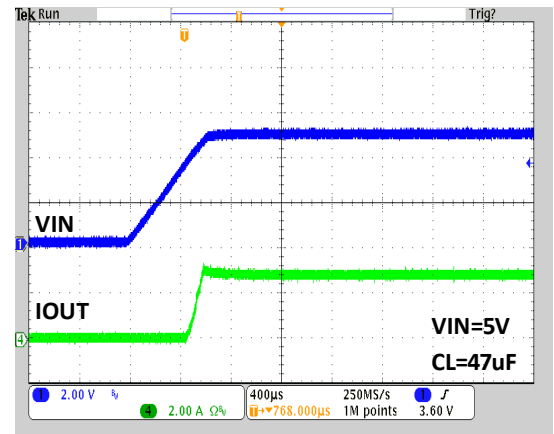

Capacitance Load Inrush Response

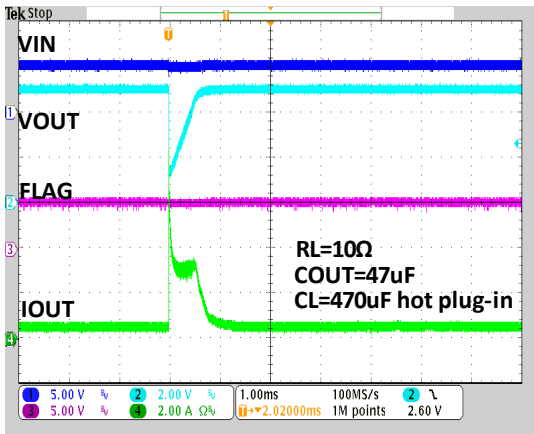


Capacitance Load Inrush Response

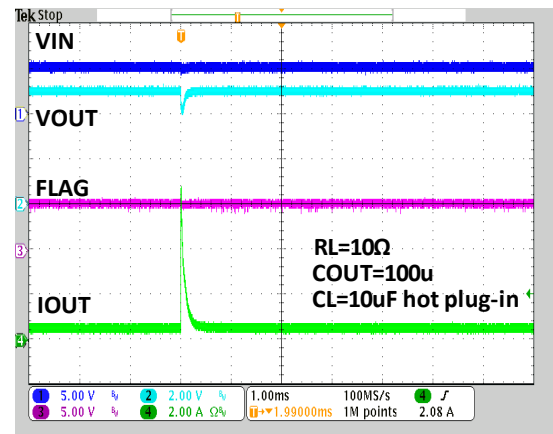


Typical Performance Characteristics (Continued)

Reverse-Current Protection Response

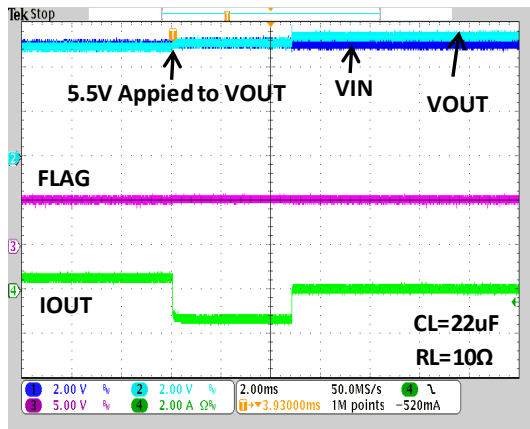

Reverse-Current Protection Recovery

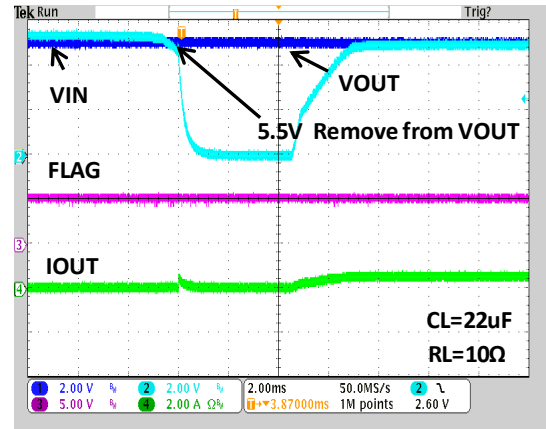

**Pin Description (G517AH)**

| PIN                |             | NAME    | FUNCTION                                                                                                                                                                                                 |
|--------------------|-------------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SOT-23-6/TSOT-23-6 | TDFN2x2-6   |         |                                                                                                                                                                                                          |
| 1                  | 6           | OUT     | Switch Output                                                                                                                                                                                            |
| 2                  | 2           | GND     | Ground                                                                                                                                                                                                   |
| 3                  | 4           | FLAG/EN | A bi-directional interface pin. As an output pin, voltage becomes low to indicate overcurrent and thermal shutdown. As an input pin, high voltage level enables chip and low voltage level disables chip |
| 4                  | 3           | DSG     | External resistor utilized to set output discharge current                                                                                                                                               |
| 5                  | 5           | SET     | Current limit set input                                                                                                                                                                                  |
| 6                  | 1           | IN      | Supply Voltage                                                                                                                                                                                           |
|                    | Thermal Pad |         | Recommend connecting the Thermal Pad to the GND for excellent power dissipation.                                                                                                                         |

**Pin Description (G517AL)**


| PIN                |             | NAME   | FUNCTION                                                                         |
|--------------------|-------------|--------|----------------------------------------------------------------------------------|
| SOT-23-6/TSOT-23-6 | TDFN2x2-6   |        |                                                                                  |
| 6                  | 1           | OUT    | Switch Output                                                                    |
| 2                  | 5           | GND    | Ground                                                                           |
| 4                  | 3           | FLAG   | Open-Drain Fault Flag (Output): Indicates overcurrent, thermal shutdown          |
| 3                  | 4           | EN(EN) | Enable Logic Input                                                               |
| 5                  | 2           | SET    | Current limit set input                                                          |
| 1                  | 6           | IN     | Supply Voltage                                                                   |
|                    | Thermal Pad |        | Recommend connecting the Thermal Pad to the GND for excellent power dissipation. |

**Pin Description (G517B/C/D/E/F/G/H)**


| PIN                    |           |                 |        |             | NAME   | PIN FUNCTION                                                                                                       |
|------------------------|-----------|-----------------|--------|-------------|--------|--------------------------------------------------------------------------------------------------------------------|
| SOT-23-5/<br>TSOT-23-5 | TSOT-23-6 | TSOT-23-6<br>FC | MSOP-8 | WDFN2x2-6   |        |                                                                                                                    |
| 2                      | 2         | 2               | 1      | 1           | GND    |                                                                                                                    |
| 5                      | 3         | 6               | 2,3    | 2           | IN     | <b>Input Supply:</b> Output MOSFET Drain, which also supplies IC's internal circuitry. Connect to positive supply. |
| 4                      | 1         | 4               | 4      | 3           | EN(EN) | <b>Enable:</b> Logic level enable input. Make sure EN pin never floating.                                          |
| 3                      | 6         | 3               | 5      | 4           | FLAG   | <b>Over-Current:</b> Open-Drain FLAG output.                                                                       |
| 1                      | 4,5       | 1               | 6,7,8  | 5,6         | OUT    | <b>Switch Output:</b> Output MOSFET Source of switch. Typically connect to switched side of load.                  |
|                        |           |                 |        | Thermal Pad |        | Recommend connecting the Thermal Pad to the GND for excellent power dissipation.                                   |

Available package type is shown on the ordering formation table.


**Block Diagrams (G517AH)**

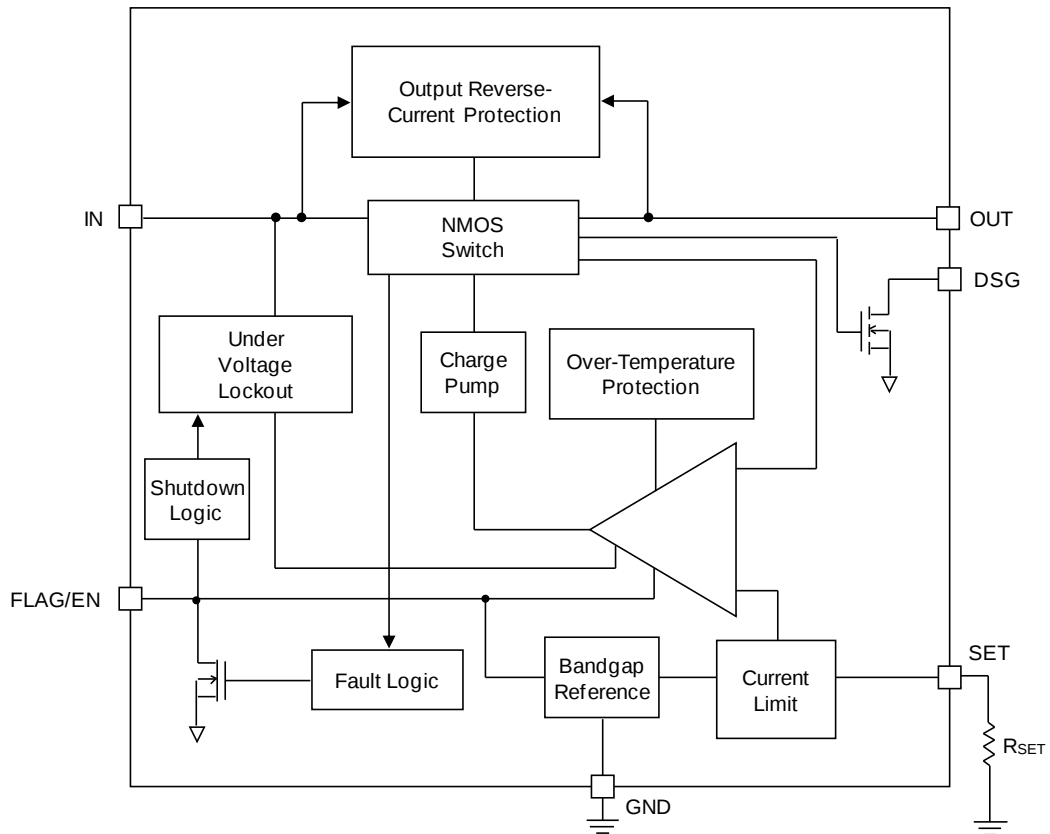

**Block Diagrams (G517AL)**

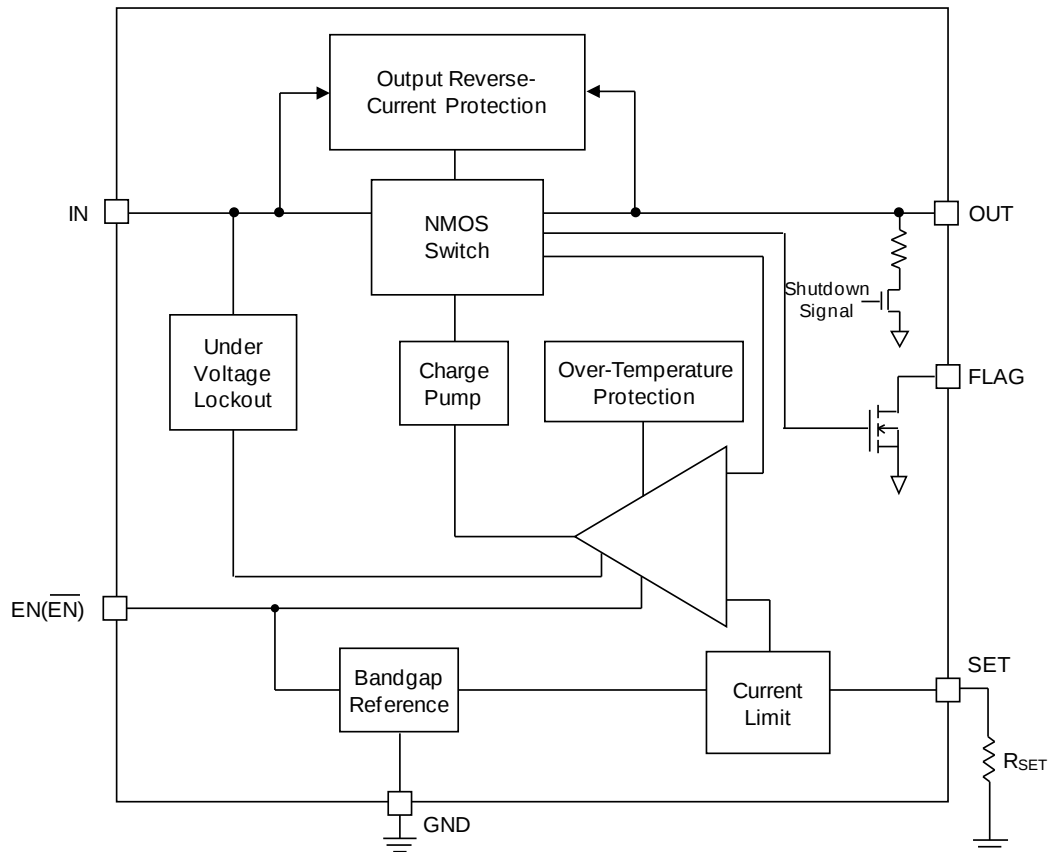

**Block Diagram (G517B/C/D/E/F/G/H)**

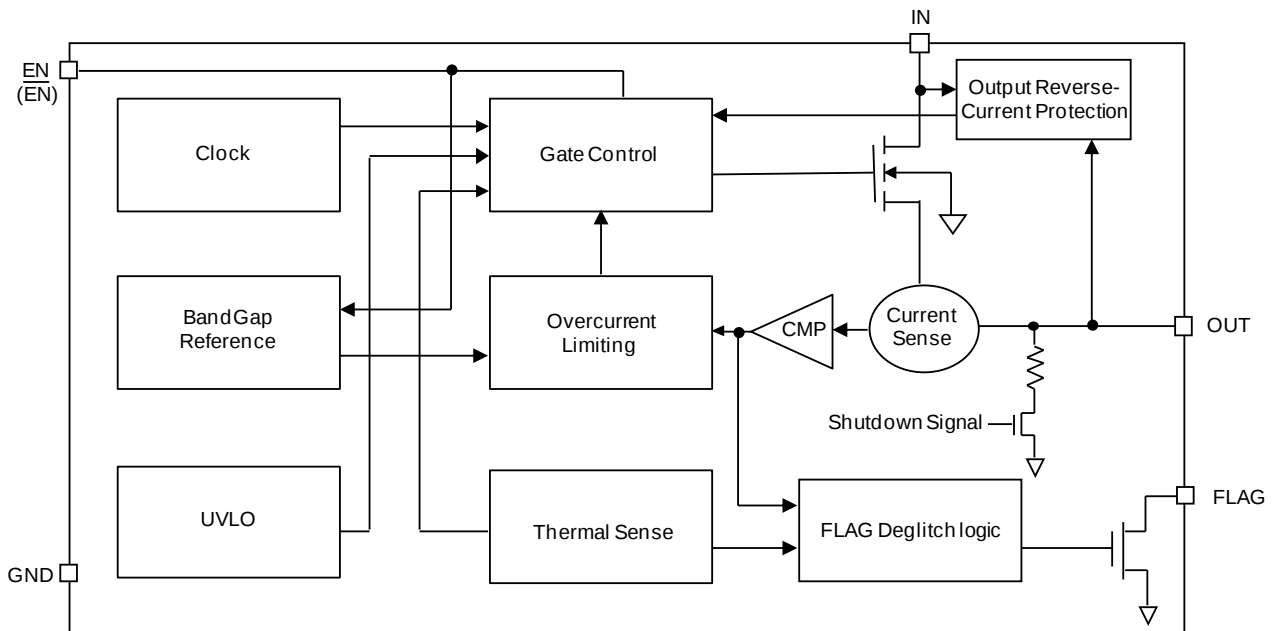

## Functional Description

### Input and Output

IN (input) is the power supply connection to the logic circuitry and the drain of the output MOSFET. OUT (output) is the source of the output MOSFET. In a typical application, current flows through the switch from IN to OUT toward the load. Both OUT pins must be connected together to the load.

### Thermal Shutdown

Thermal shutdown protects G517AH/AL/BCDEFGH from excessive power dissipation. If the die temperature exceeds aforementioned OT spec., the MOSFETS switch is shut off. The hysteresis prevents the switch from turning on until the die temperature drops to  $OT_{HYS}$ . Thermal shutdown circuit functions only when the switch is enabled.

### Undervoltage Lockout

UVLO (undervoltage lockout) prevents the output MOSFET from turning on until IN (input voltage) exceeds 2.1/2.4V typically. After the switch turns on, if the voltage drops below 2.1/2.4V typically, UVLO shuts off the output MOSFET.

### Over Current Trigger Point (G517AH)

The G517AH over current trigger point is programmed with a resistor from SET to ground. The typical value is determined by  $R_{SET}$ . We can choose the proper  $R_{SET}$  by Table1.

### Over Current Trigger Point (G517AL)

The G517AL over current trigger point is programmed with a resistor from SET to ground. The typical value is determined by  $R_{SET}$ . We can choose the proper  $R_{SET}$  by Table2. There is short-circuit fold-back current limit when  $V_{IN} > 3.5V$  and  $V_{OUT} < 1V$ .

### Over Current Trigger Point (G517B/C/D/E/F/G/H)

The typical over current trigger point of G517 is 3.4A, 3.2A, 2.5A, 1.8A, 1.3A, 0.8A, 0.4A. There is short-circuit fold-back current when  $V_{IN} > 3.5V$  and  $V_{OUT} < 1V$ . (See Typical Performance Characteristics)

### Output Reverse Current Protection

The output reverse-current protection turns off the MOSFET switch whenever the unexpected continuously reverse current is higher than the 0.8/1.9/0.8A (typ) for 0.7/5/5ms (typ) and the MOSFET switch will turn on when output reverse-current condition is removed for 0.7/5/5ms (typ) (G517AH/G517AL/G517X).

### Discharge Function (G517AH)

When the device is disabled or IN is below UVLO threshold, the discharge function is active. The discharge function provides a discharge path for external storage capacitor by connecting a resistor between OUT and DSG. 150/100 Ohm is minimum requirement for  $V_{IN} = 5/3V$  application.

### FLAG Function

The FLAG open-drain output is asserted (active low) when an over current condition is encountered after a 9-ms deglitch timeout. The output remains asserted until the overcurrent condition is removed. Over temperature condition is also reported immediately by FLAG open-drain output.

### Over Current Regulation and Protection (G517AL)

In over current condition, the temperature of the chip will rise. It results in thermal shutdown of the MOSFETS switch as over current condition is not removed. Then, the device enters in over current regulation and protection modes. In over current regulation mode, the current is regulated to the desired over current level and the MOSFETS switch is turned off in over current protection mode. The over current regulation and protection modes allow the device to release high thermal dissipation within temperature operation condition.

### FLAG/EN Function (G517AH)

This pin serves as both an input and output pin. The FLAG/EN output is asserted (active low) when an over current condition is encountered after a 3ms deglitch timeout. The output remains asserted until the IN voltage is below UVLO to reset the switch. Over temperature condition is also reported immediately by FLAG/EN open-drain output. The FLAG/EN input is inactive with low voltage level and active with high voltage level.

### Soft-Start Protection (G517AH)

When power switch turns on, the soft-start protection is utilized to ensure 5ms(typ) on-time of power switch and all operation of G517AH is recommended to be performed after this soft-start protection.

## Applications Information

### Supply Filtering

A 1 $\mu$ F bypass capacitor from IN to GND, located near the G517, is strongly recommended to control supply transients. Without a bypass capacitor, an output short may cause sufficient ringing on the input (from supply lead inductance) to damage internal control circuitry.

Input transients must not exceed the absolute maximum supply voltage ( $V_{IN\ max} = 6V$ ) even for a short duration.

### EN, the Enable Input

EN must be driven logic high or logic low for a clearly defined input. Floating the input may cause unpredictable operation. EN should not be allowed to go negative with respect to GND.

**Table 1. Current Limit RSET Value for G517AH**

| RSET(kΩ) | Current Limit Min (A) | Current Limit Typ (A) | Current Limit Max (A) |
|----------|-----------------------|-----------------------|-----------------------|
| 7.68     | 2.43 (-10%)           | 2.7                   | 2.97 (+10%)           |
| 8.25     | 2.25 (-10%)           | 2.5                   | 2.75 (+10%)           |
| 9.53     | 1.98 (-10%)           | 2.2                   | 2.42 (+10%)           |
| 10.5     | 1.8 (-10%)            | 2                     | 2.2 (+10%)            |
| 11.5     | 1.62 (-10%)           | 1.8                   | 1.98 (+10%)           |
| 14.3     | 1.35 (-10%)           | 1.5                   | 1.65 (+10%)           |
| 17.4     | 1.08 (-10%)           | 1.2                   | 1.32 (+10%)           |
| 21       | 0.9 (-10%)            | 1                     | 1.1 (+10%)            |
| 34.8     | 0.5 (-16.7%)          | 0.6                   | 0.7 (+16.7%)          |
| 42       | 0.4 (-20%)            | 0.5                   | 0.6 (+20%)            |


Note: The Relationship between RSET (KΩ) and Typical Current Limit (A) is about Current Limit =21/RSET

**Table 2. Current Limit RSET Value for G517AL**



| RSET(kΩ) | Current Limit Min (A) | Current Limit Typ (A) | Current Limit Max (A) |
|----------|-----------------------|-----------------------|-----------------------|
| 9.76     | 2.58 (-10%)           | 2.87                  | 3.16 (+10%)           |
| 11       | 2.25 (-10%)           | 2.5                   | 2.75 (+10%)           |
| 24.9     | 0.9 (-10%)            | 1.0                   | 1.1 (+10%)            |
| 37.4     | 0.6 (-15%)            | 0.7                   | 0.8 (+15%)            |
| 49.9     | 0.425 (-15%)          | 0.5                   | 0.575 (+15%)          |
| 100      | 0.175 (-30%)          | 0.25                  | 0.325 (+30%)          |

Note: The Relationship between RSET (KΩ) and Typical Current Limit (A) is about Current Limit =30.9/(RSET)^1.05


## Test Circuit

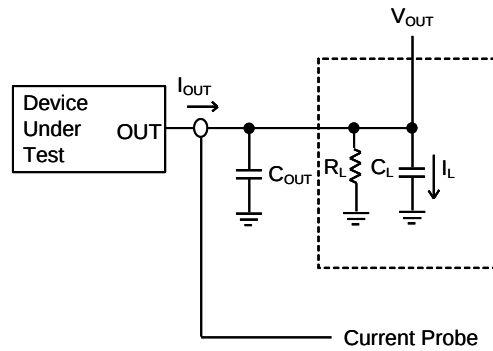

## Timing Diagrams

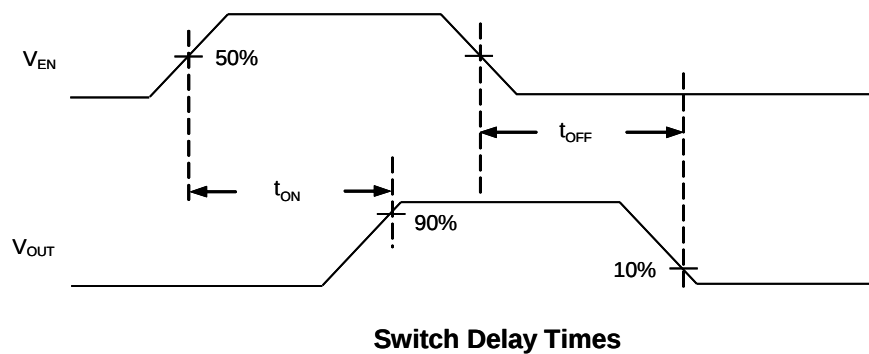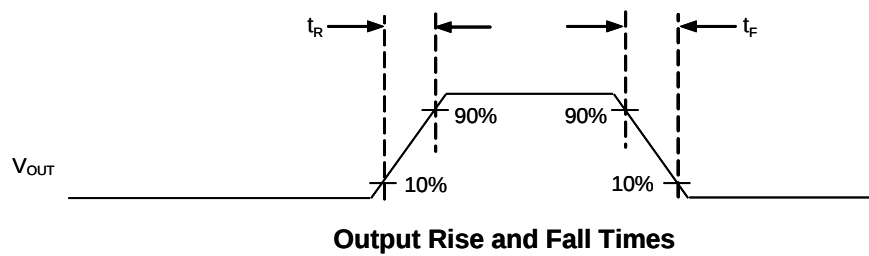


**Package Information**

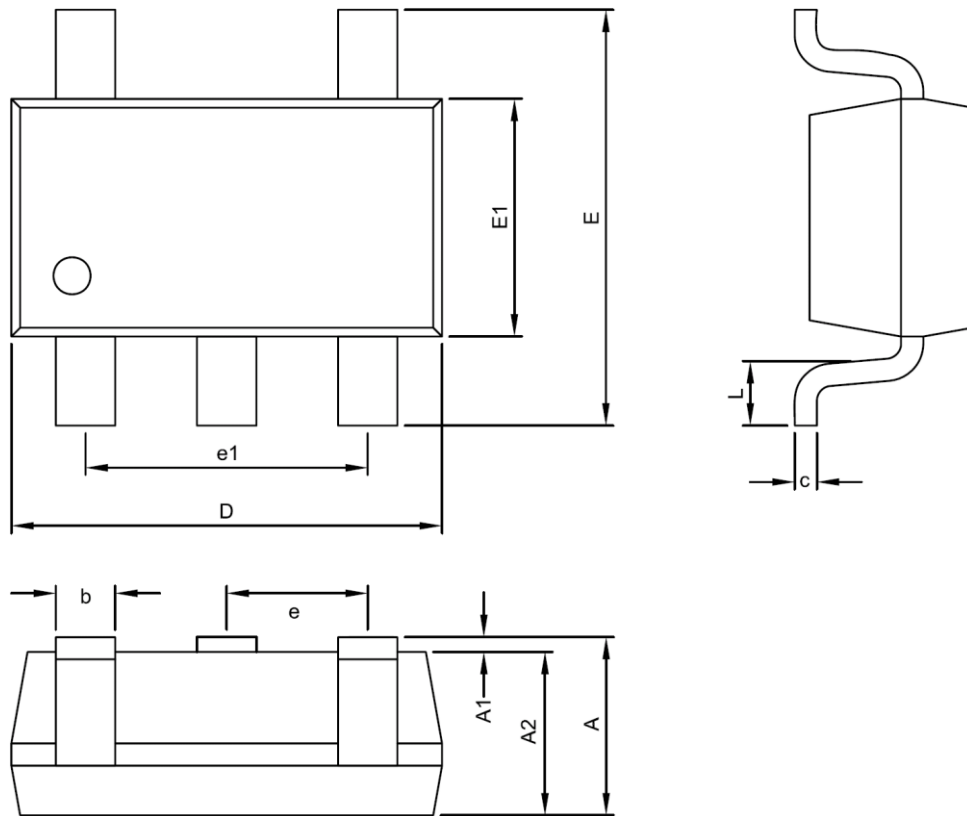

**SOT-23-5 Package**




| Symbol | DIMENSION IN MM |      |      | DIMENSION IN INCH |       |       |
|--------|-----------------|------|------|-------------------|-------|-------|
|        | MIN.            | NOM. | MAX. | MIN.              | NOM.  | MAX.  |
| A      | 0.95            | 1.10 | 1.45 | 0.037             | 0.043 | 0.057 |
| A1     | 0.00            | ---  | 0.15 | 0.000             | ---   | 0.006 |
| A2     | 0.90            | 1.10 | 1.30 | 0.035             | 0.043 | 0.051 |
| D      | 2.70            | 2.90 | 3.10 | 0.106             | 0.114 | 0.122 |
| E      | 2.60            | 2.80 | 3.00 | 0.102             | 0.110 | 0.118 |
| E1     | 1.50            | 1.60 | 1.70 | 0.059             | 0.063 | 0.067 |
| c      | 0.08            | 0.15 | 0.25 | 0.003             | 0.006 | 0.010 |
| b      | 0.30            | 0.40 | 0.50 | 0.012             | 0.016 | 0.020 |
| e      | 0.95 BSC        |      |      | 0.037 BSC         |       |       |
| e1     | 1.90 BSC        |      |      | 0.075 BSC         |       |       |
| L      | 0.30            | 0.45 | 0.60 | 0.012             | 0.018 | 0.024 |

**Taping Specification**



Feed Direction


| PACKAGE  | Q'TY/REEL |
|----------|-----------|
| SOT-23-5 | 3,000 ea  |

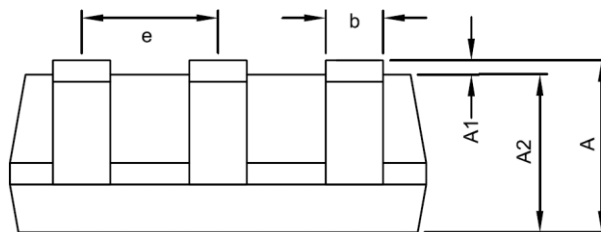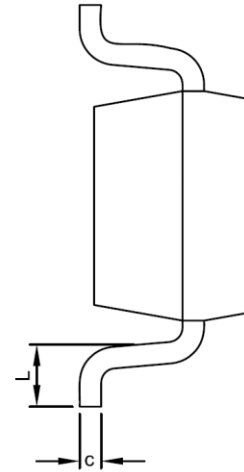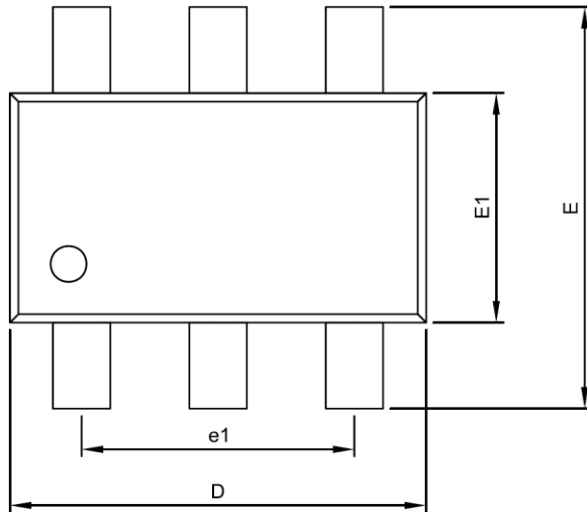




**SOT-23-6 Package**

| Symbol | DIMENSION IN MM |      |      | DIMENSION IN INCH |       |       |
|--------|-----------------|------|------|-------------------|-------|-------|
|        | MIN.            | NOM. | MAX. | MIN.              | NOM.  | MAX.  |
| A      | 0.95            | 1.10 | 1.45 | 0.037             | 0.043 | 0.057 |
| A1     | 0.00            | ---  | 0.15 | 0.000             | ---   | 0.006 |
| A2     | 0.90            | 1.10 | 1.30 | 0.035             | 0.043 | 0.051 |
| D      | 2.70            | 2.90 | 3.10 | 0.106             | 0.114 | 0.122 |
| E      | 2.60            | 2.80 | 3.00 | 0.102             | 0.110 | 0.118 |
| E1     | 1.50            | 1.60 | 1.70 | 0.059             | 0.063 | 0.067 |
| c      | 0.08            | 0.15 | 0.25 | 0.003             | 0.006 | 0.010 |
| b      | 0.30            | 0.40 | 0.50 | 0.012             | 0.016 | 0.020 |
| e      | 0.95 BSC        |      |      | 0.037 BSC         |       |       |
| e1     | 1.90 BSC        |      |      | 0.075 BSC         |       |       |
| L      | 0.30            | 0.45 | 0.60 | 0.012             | 0.018 | 0.024 |

## Taping Specification




| PACKAGE  | Q'TY/REEL |
|----------|-----------|
| SOT-23-6 | 3,000 ea  |

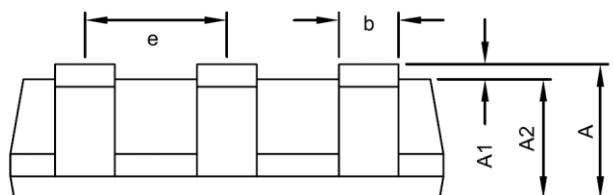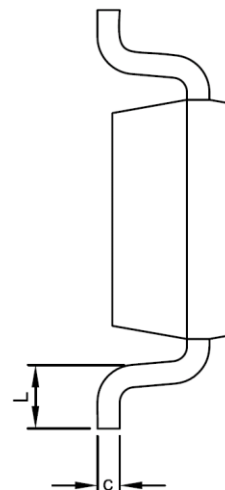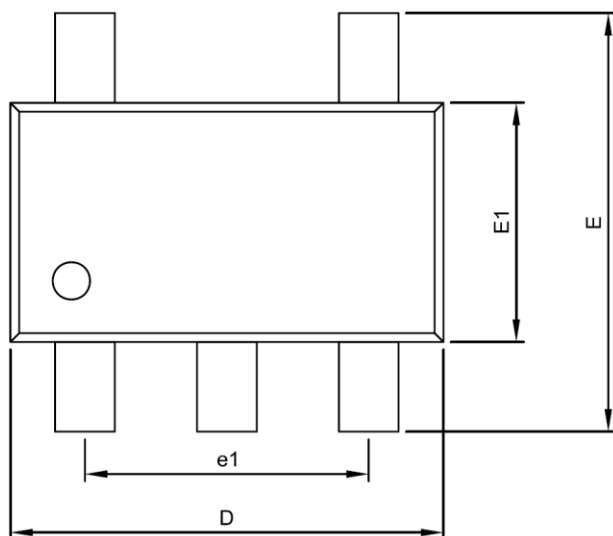

**TSOT-23-5 Package**

| Symbol | DIMENSION IN MM |      |      | DIMENSION IN INCH |       |       |
|--------|-----------------|------|------|-------------------|-------|-------|
|        | MIN.            | NOM. | MAX. | MIN.              | NOM.  | MAX.  |
| A      | ---             | ---  | 0.90 | ---               | ---   | 0.035 |
| A1     | 0.00            | 0.05 | 0.10 | 0.000             | 0.002 | 0.004 |
| A2     | 0.70            | 0.75 | 0.80 | 0.028             | 0.030 | 0.031 |
| D      | 2.70            | 2.90 | 3.10 | 0.106             | 0.114 | 0.122 |
| E      | 2.60            | 2.80 | 3.00 | 0.102             | 0.110 | 0.118 |
| E1     | 1.50            | 1.60 | 1.70 | 0.059             | 0.063 | 0.067 |
| c      | 0.15 REF        |      |      | 0.006 REF         |       |       |
| b      | 0.30            | 0.40 | 0.50 | 0.012             | 0.016 | 0.020 |
| e      | 0.95 BSC        |      |      | 0.037 BSC         |       |       |
| e1     | 1.90 BSC        |      |      | 0.075 BSC         |       |       |
| L      | 0.30            | 0.45 | 0.60 | 0.012             | 0.018 | 0.024 |

## Taping Specification




| PACKAGE   | Q'TY/REEL |
|-----------|-----------|
| TSOT-23-5 | 3,000 ea  |

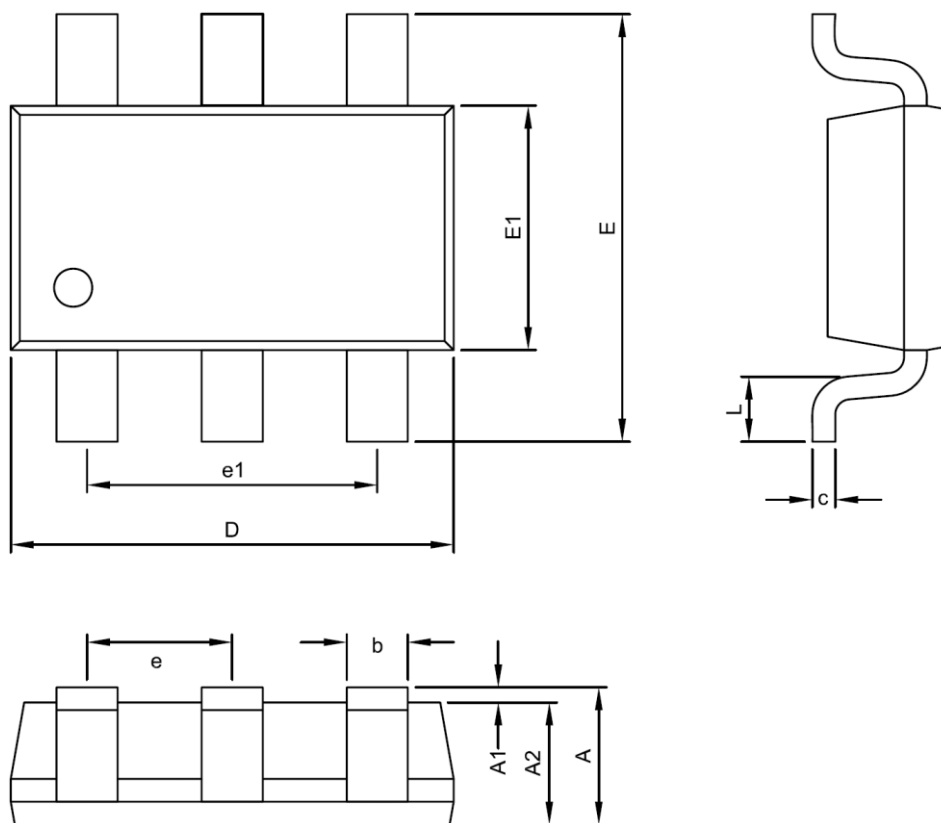

**TSOT-23-6 Package**


| Symbol | DIMENSION IN MM |      |      | DIMENSION IN INCH |       |       |
|--------|-----------------|------|------|-------------------|-------|-------|
|        | MIN.            | NOM. | MAX. | MIN.              | NOM.  | MAX.  |
| A      | ---             | ---  | 0.90 | ---               | ---   | 0.035 |
| A1     | 0.00            | 0.05 | 0.10 | 0.000             | 0.002 | 0.004 |
| A2     | 0.70            | 0.75 | 0.80 | 0.028             | 0.030 | 0.031 |
| D      | 2.70            | 2.90 | 3.10 | 0.106             | 0.114 | 0.122 |
| E      | 2.60            | 2.80 | 3.00 | 0.102             | 0.110 | 0.118 |
| E1     | 1.50            | 1.60 | 1.70 | 0.059             | 0.063 | 0.067 |
| c      | 0.08            | 0.15 | 0.25 | 0.003             | 0.006 | 0.010 |
| b      | 0.30            | 0.40 | 0.50 | 0.012             | 0.016 | 0.020 |
| e      | 0.95 BSC        |      |      | 0.037 BSC         |       |       |
| e1     | 1.90 BSC        |      |      | 0.075 BSC         |       |       |
| L      | 0.30            | 0.45 | 0.60 | 0.012             | 0.018 | 0.024 |

## Taping Specification



Feed Direction


| PACKAGE   | Q'TY/REEL |
|-----------|-----------|
| TSOT-23-6 | 3,000 ea  |

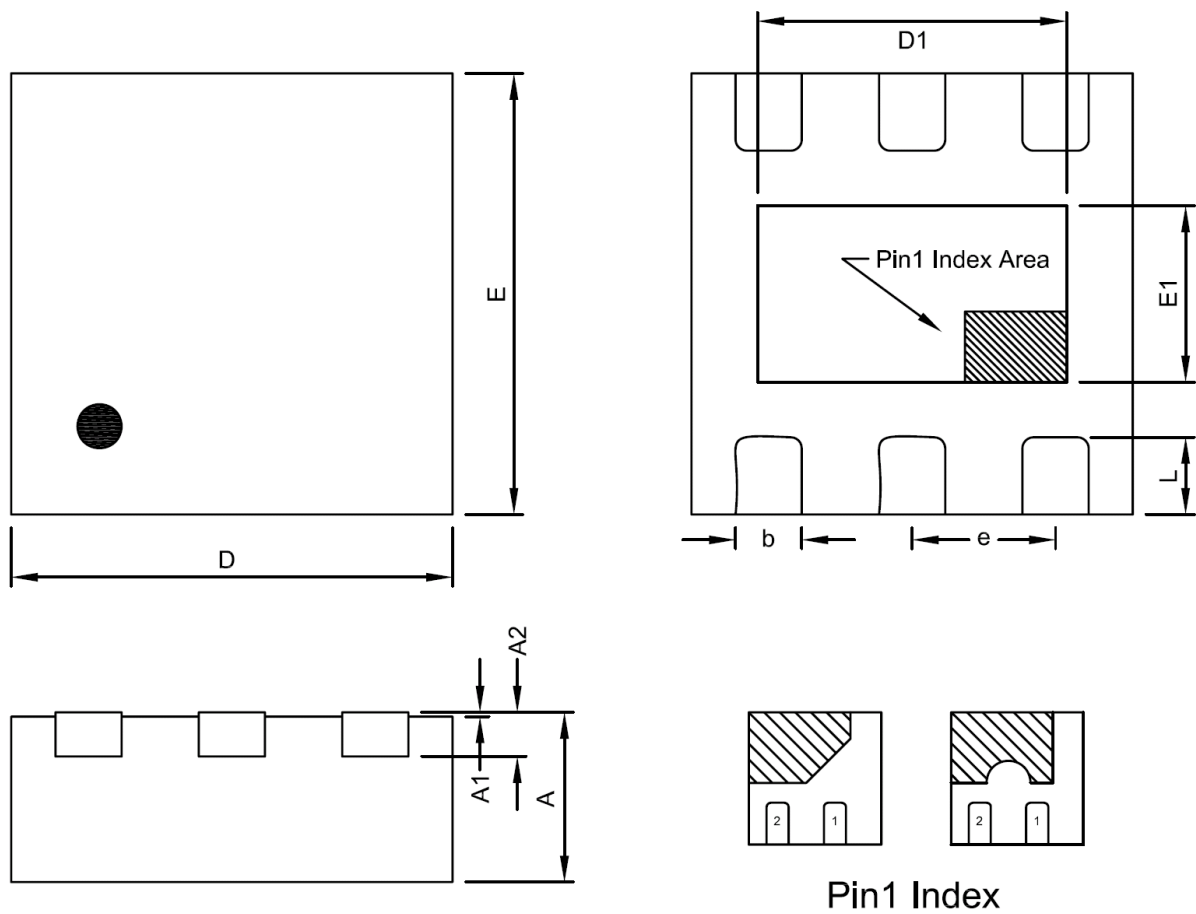


**TDFN2X2-6 Package**

| Symbol | DIMENSION IN MM |      |      | DIMENSION IN INCH |        |        |
|--------|-----------------|------|------|-------------------|--------|--------|
|        | MIN.            | NOM. | MAX. | MIN.              | NOM.   | MAX.   |
| A      | 0.70            | 0.75 | 0.80 | 0.0276            | 0.0295 | 0.0315 |
| A1     | 0.00            | ---  | 0.05 | 0.0000            | ---    | 0.0020 |
| A2     | 0.20 REF        |      |      | 0.0079 REF        |        |        |
| D      | 1.95            | 2.00 | 2.05 | 0.0768            | 0.0787 | 0.0807 |
| E      | 1.95            | 2.00 | 2.05 | 0.0768            | 0.0787 | 0.0807 |
| D1     | 1.15            | 1.30 | 1.45 | 0.0453            | 0.0512 | 0.0571 |
| E1     | 0.55            | 0.70 | 0.85 | 0.0217            | 0.0276 | 0.0335 |
| b      | 0.20            | 0.30 | 0.35 | 0.0079            | 0.0118 | 0.0138 |
| e      | 0.65 BSC        |      |      | 0.0256 BSC        |        |        |
| L      | 0.30            | 0.35 | 0.40 | 0.0118            | 0.0138 | 0.0157 |

## Taping Specification

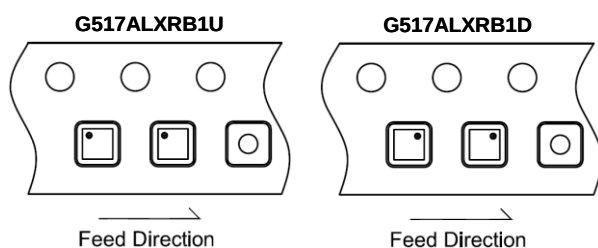


| PACKAGE   | Q'TY/REEL |
|-----------|-----------|
| TDFN2X2-6 | 3,000 ea  |

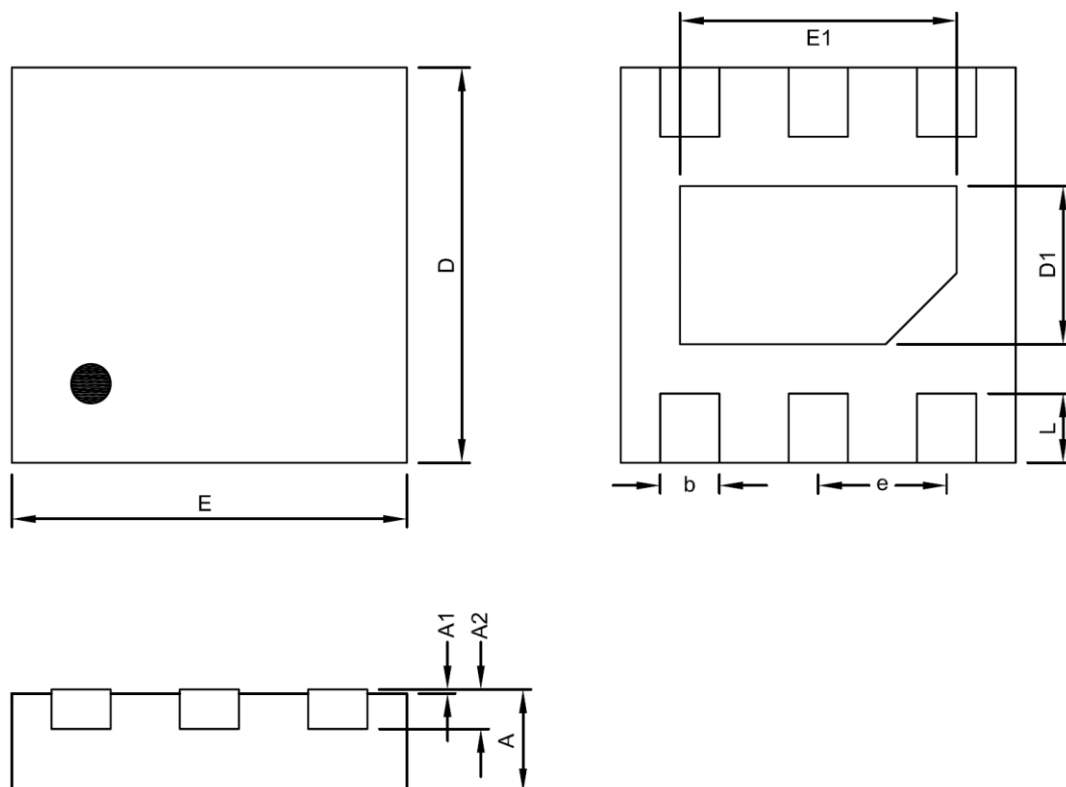
**WDFN2X2-6 Package**


| Symbol | DIMENSION IN MM |      |      | DIMENSION IN INCH |        |        |
|--------|-----------------|------|------|-------------------|--------|--------|
|        | MIN.            | NOM. | MAX. | MIN.              | NOM.   | MAX.   |
| A      | 0.45            | 0.50 | 0.55 | 0.0177            | 0.0197 | 0.0217 |
| A1     | 0.00            | ---  | 0.05 | 0.0000            | ---    | 0.0020 |
| A2     | 0.20 REF        |      |      | 0.0079 REF        |        |        |
| D      | 1.95            | 2.00 | 2.05 | 0.0768            | 0.0787 | 0.0807 |
| E      | 1.95            | 2.00 | 2.05 | 0.0768            | 0.0787 | 0.0807 |
| D1     | 0.70            | 0.80 | 0.90 | 0.0276            | 0.0315 | 0.0354 |
| E1     | 1.30            | 1.40 | 1.50 | 0.0512            | 0.0551 | 0.0591 |
| b      | 0.20            | 0.30 | 0.35 | 0.0079            | 0.0118 | 0.0138 |
| e      | 0.65 BSC        |      |      | 0.0256 BSC        |        |        |
| L      | 0.30            | 0.35 | 0.40 | 0.0118            | 0.0138 | 0.0157 |

### Taping Specification




Feed Direction

| PACKAGE   | Q'TY/REEL |
|-----------|-----------|
| WDFN2X2-6 | 3,000 ea  |

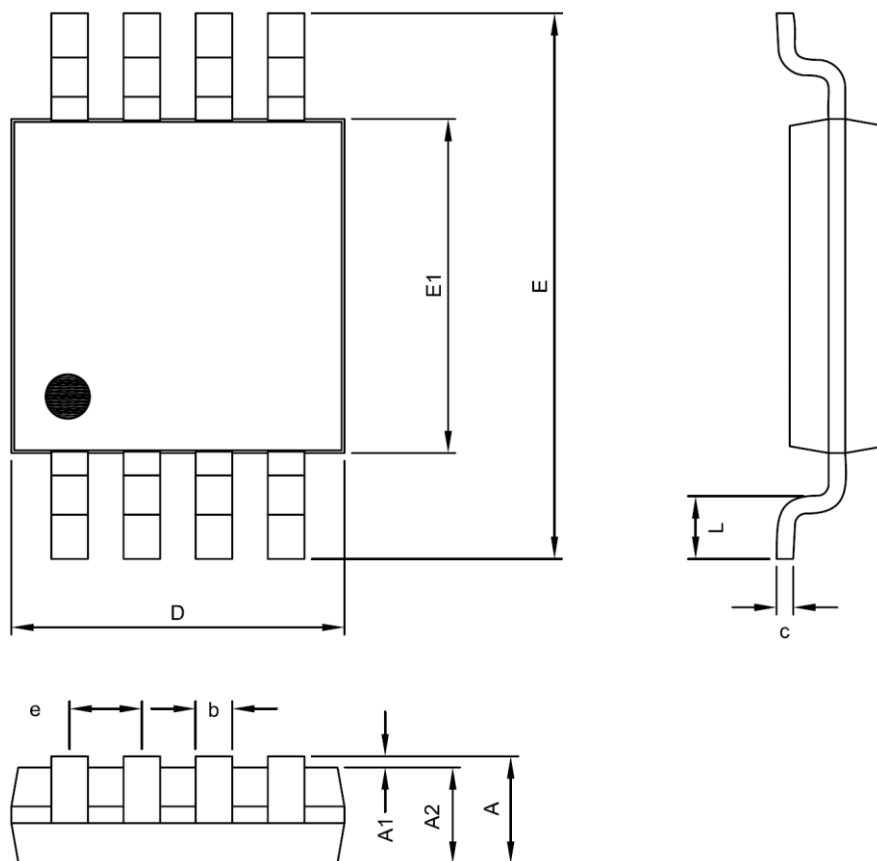
**MSOP-8 Package**

| Symbol | DIMENSION IN MM |      |      | DIMENSION IN INCH |       |       |
|--------|-----------------|------|------|-------------------|-------|-------|
|        | MIN.            | NOM. | MAX. | MIN.              | NOM.  | MAX.  |
| A      | 0.81            | 0.95 | 1.10 | 0.032             | 0.037 | 0.043 |
| A1     | 0.00            | ---  | 0.15 | 0.000             | ---   | 0.006 |
| A2     | 0.75            | 0.86 | 0.96 | 0.030             | 0.034 | 0.038 |
| D      | 2.85            | 3.00 | 3.15 | 0.112             | 0.118 | 0.124 |
| E      | 4.75            | 4.90 | 5.05 | 0.187             | 0.193 | 0.199 |
| E1     | 2.85            | 3.00 | 3.15 | 0.112             | 0.118 | 0.124 |
| b      | 0.22            | 0.30 | 0.38 | 0.009             | 0.012 | 0.015 |
| c      | 0.15 REF        |      |      | 0.006 REF         |       |       |
| e      | 0.65 BSC        |      |      | 0.026 BSC         |       |       |
| L      | 0.4             | 0.53 | 0.8  | 0.016             | 0.021 | 0.031 |

## Taping Specification

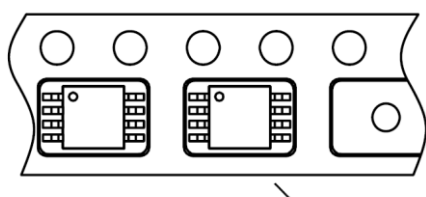

Feed Direction

| PACKAGE | Q'TY/REEL |
|---------|-----------|
| MSOP-8  | 3,000 ea  |