

Resistor-Programmable SOT Temperature Switches

Features

- $\pm 0.5^{\circ}\text{C}$ Typical Threshold Accuracy
- $\pm 3.5^{\circ}\text{C}$ (max) Threshold Accuracy (0°C to $+125^{\circ}\text{C}$)
- $\pm 3^{\circ}\text{C}$ Threshold Accuracy (60°C to $+100^{\circ}\text{C}$)
- Temperature Threshold Set by a 1% External Resistor
- Low $33\mu\text{A}$ Supply Current
- Open-Drain Active Low Output Stage
- Guaranteed Reset Valid to $V_{\text{CC}} = 0.8\text{V}$
- Pin-Selectable 10°C or 30°C Hysteresis
- SOT-23-5 and TDFN2X2-8 Packages

Applications

- μP Temperature Monitoring in High-Speed Computers
- Temperature Control
- Temperature Alarms
- Fan Control
- Automotive

General Description

The G708 are fully integrated, resistor programmable temperature switches with thresholds set by an external resistor. They require only one external resistor to set the temperature threshold within a wide 0°C to $+125^{\circ}\text{C}$ temperature range. The G708 provides an open-drain, active low output. These switches operate with a $+2.7\text{V}$ to $+5.5\text{V}$ single supply while providing a temperature threshold accuracy of $\pm 0.5^{\circ}\text{C}$ (TYP) or $\pm 3.5^{\circ}\text{C}$ (MAX) or $\pm 3^{\circ}\text{C}$ (60°C to $+100^{\circ}\text{C}$). They typically consume $33\mu\text{A}$ supply current. Hysteresis is pin selectable to 10°C or 30°C . The G708 are available in 5-pin SOT-23 and TDFN2X2-8 packages.


Ordering Information

ORDER NUMBER	MARKING	TEMP. RANGE	PACKAGE (Green)
G708T1U	708xx	$-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$	SOT-23-5
G708RCU	708	$-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$	TDFN2X2-8

Note: T1: SOT-23-5 RC: TDFN2X2-8


U: Tape & Reel

Pin Configuration

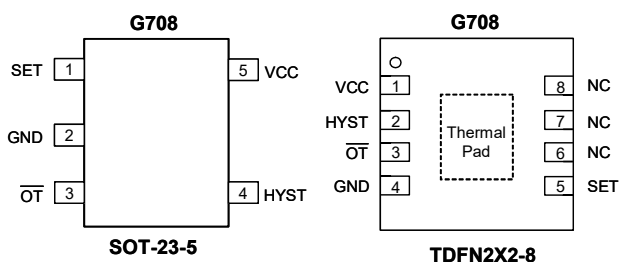

Note 1: Thermal Pad is NC
 Note 2: Connect Thermal Pad and pin 6,7,8 to heat source by PCB copper for good heat conduction.

Typical Application Circuit

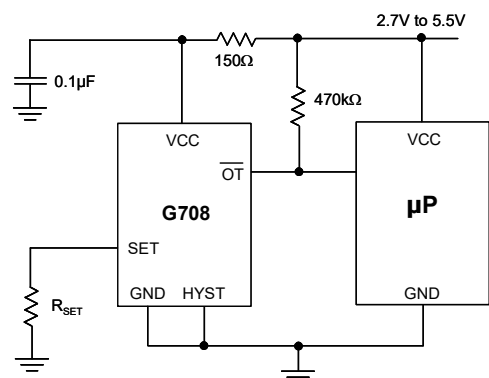

Absolute Maximum Ratings

Reference to GND Supply Voltage (VCC) .. -0.3V to +6V
 $\overline{OT}$ -0.3V to +6V
 SET, HYST. -0.3V to (VCC + 0.3V)
 Output Current (all pins) 20mA
 Input Current (all pins) 20mA

Continuous Power Dissipation ($T_A = +70^\circ\text{C}$)
 SOT-23 (derate 7.1mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$) 571mW
 Operating Temperature Range. -40°C to $+125^\circ\text{C}$
 Junction Temperature. $+150^\circ\text{C}$
 Storage Temperature Range. -65°C to $+150^\circ\text{C}$
 Reflow Temperature (soldering, 10s) 260°C
 ESD Protection 2kV

* Please refer to Minimum Footprint PCB Layout Section.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Electrical Characteristics




V_{CC} = +2.7V to +5.5V.

The device is not guaranteed to function outside its operating conditions. Parameters with MIN and/or MAX limits are 100% tested at $+25^\circ\text{C}$, unless otherwise specified.


PARAMETER	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
Supply Voltage Range	V _{CC}		2.7	---	5.5	V
Supply Current	I _{CC}	V _{CC} =3.3V	---	33	55	μA
Temperature Threshold Accuracy	ΔT_{TH}	T _A = 0°C to $+125^\circ\text{C}$	-3.5	±0.5	3.5	$^\circ\text{C}$
Temperature Threshold Accuracy	ΔT_{TH}	T _A = 60°C to $+100^\circ\text{C}$	-3	±0.5	3	$^\circ\text{C}$
HYST Input Leakage			---	1	---	μA
HYST Input Threshold	V _{IH}		0.7 x V _{CC}	---	---	V
	V _{IL}		---	---	0.3 x V _{CC}	V
Open-Drain Output Sink Current	I _{OT}	V _{OT} = 0.3V	5	12	---	mA
Open-Drain Output Leakage Current	I _{LEAK OT}	V _{OT} = V _{CC}	---	1	---	μA

Typical Operating Characteristics

$V_{CC} = +5V$

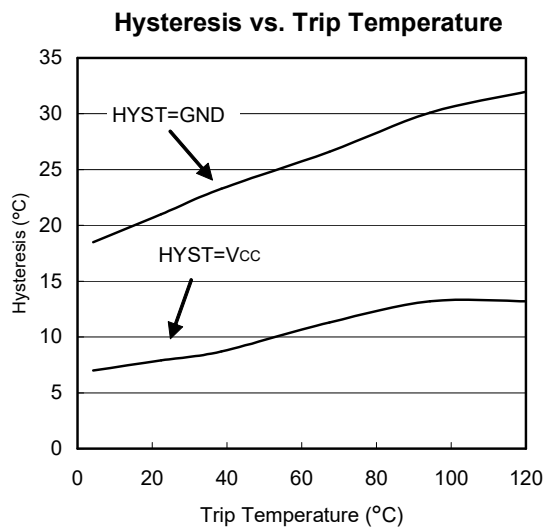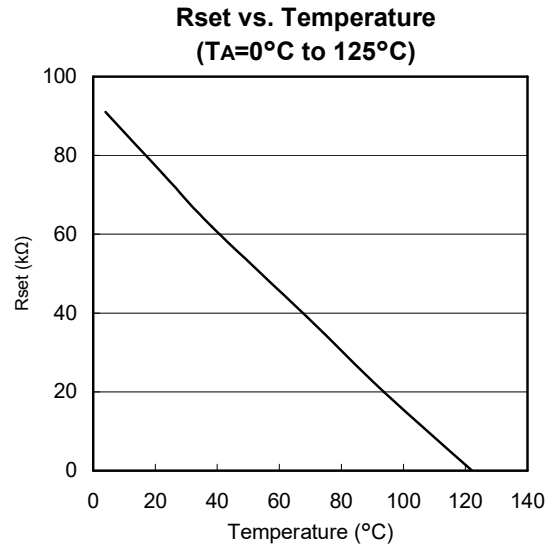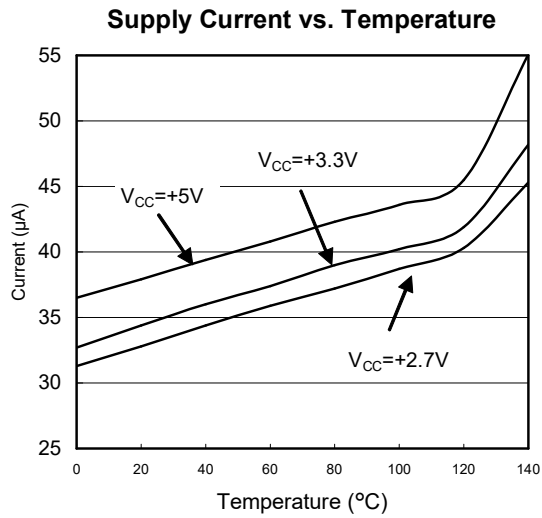


Minimum Footprint PCB Layout Section

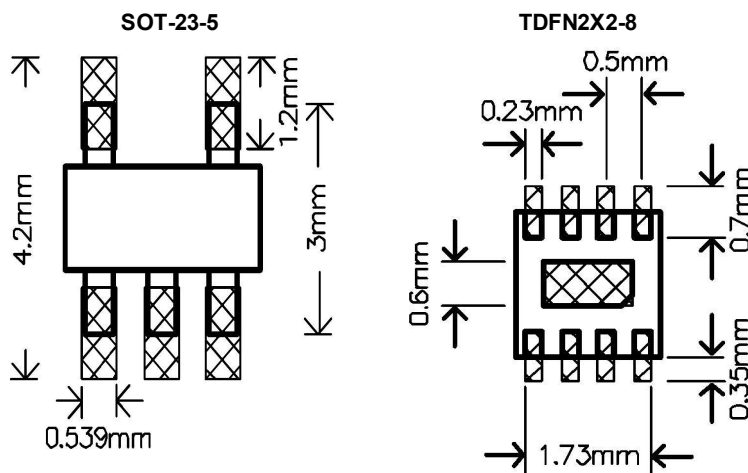

Pin Description

PIN		NAME	FUNCTION
SOT-23-5	TDFN2X2-8		
1	5	SET	Temperature Set Point, Connect an external 1% resistor from SET to GND to set trip point.
2	4	GND	Ground
3	3	$\overline{\text{OT}}$	Open-Drain Active Low Output.
4	2	HYST	Hysteresis Selection. Hysteresis is 10°C for HYST = V _{CC} , 30°C for HYST = GND.
	6,7,8	NC	Not Connected.
5	1	VCC	Power-Supply Input.

Block Diagram

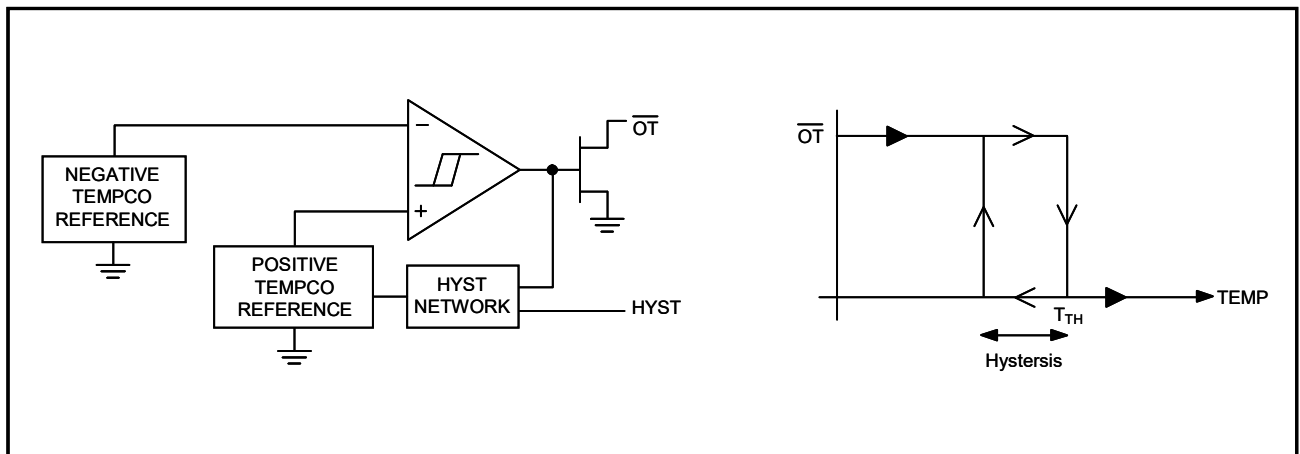

Detailed Description

The G708 fully integrated temperature switches incorporate two temperature-dependent references and one comparator. One reference exhibits a positive temperature coefficient, and the other has a negative temperature coefficient. The temperature at which the two reference voltages are equal determines the temperature trip point. Pin-selectable 10°C or 30°C hysteresis keeps the output from oscillating when the temperature is close to the threshold. The G708 has an active-low, open-drain output structure.

The G708 are programmable for a wide range of temperature thresholds from 0°C to +125°C. The temperature threshold is set by an external resistor between SET and GND. The G708 output easily interfaces with a microprocessor (μP) reset input.

Hysteresis Input

The HYST pin is a CMOS-compatible input that selects hysteresis at either a high level (10°C for HYST = VCC) or a low level (30°C for HYST = GND). Hysteresis prevents the output from oscillating when the temperature is near the trip point. **Do not leave HYST unconnected.** Connect HYST to GND or VCC. Other input voltages cause increased supply current or abnormal function.

Applications Information

Set-Point Resistor

To set the trip-point temperature, connect a resistor between SET and GND. The resistor's value is determined either from the RSET vs. Temperature graphs (see *Typical Operating Characteristics*) or from the equations below.

To set the temperature trip point from 0°C to +125°C, use the following equation:

$$R_{SET} (k\Omega) = 0.0012T^2 - 0.9308T + 96.147$$

where T is the trip temperature in Centigrade. R_{SET} is the set-point resistance.

Thermal Considerations

The G708 supply current is typically 33μA. When used to drive high-impedance loads, the devices dissipate negligible power; therefore, the die temperature is essentially the same as the package temperature. The key to accurate temperature monitoring is good thermal contact between the G708 package and the device being monitored. In some applications, the SOT-23 packages may be small enough to fit underneath a socketed μP, allowing the device to monitor the μP's temperature directly. Use the monitor's output to reset the μP, assert an interrupt, or trigger an external alarm. Accurate temperature monitoring depends on the thermal resistance between the device being monitored and the G708 die.


The rise in die temperature due to self-heating is given by the following formula:

$$\Delta T_J = P_{DISS} \times \theta_{JA}$$


where P_{DISS} is the power dissipated by the G708, and θ_{JA} is the package's thermal resistance. The typical thermal resistance is 115°C/W for the SOT-23 package. To limit the effects of self-heating, minimize the output currents.

Power Noise Filtering


To reduce trig point error caused by power noise, place a 150Ω resistor and 0.1μF capacitor as the low pass filter for V_{CC} .

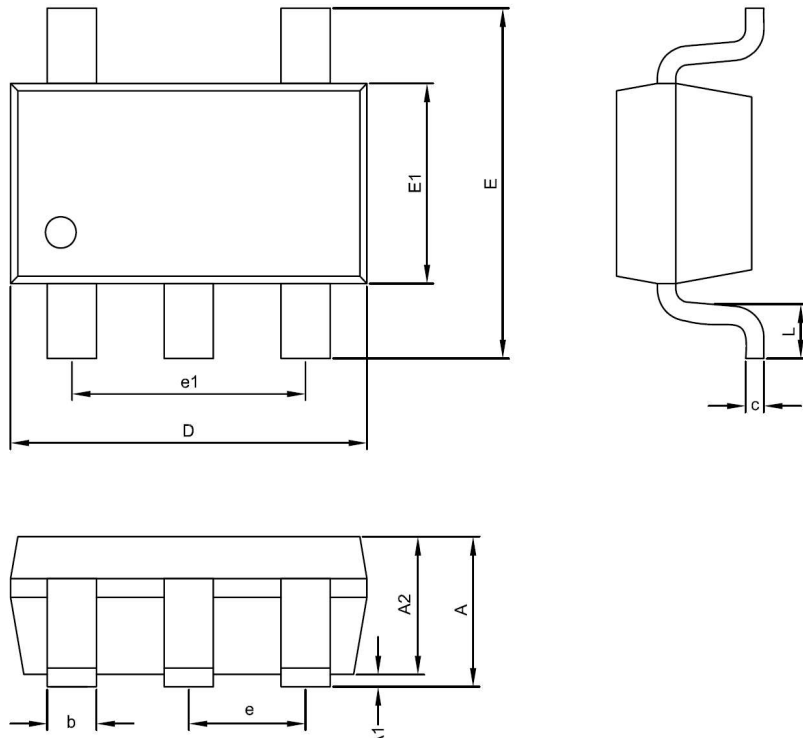Package Information

SOT-23-5 (T1) Package

Symble	DIMENSION IN MM			DIMENSION IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	1.00	1.10	1.45	0.039	0.043	0.057
A1	0.00	---	0.15	0.000	---	0.006
A2	1.00	1.10	1.30	0.039	0.043	0.051
D	2.80	2.90	3.00	0.110	0.114	0.118
E	2.60	2.80	3.00	0.102	0.110	0.118
E1	1.50	1.60	1.70	0.059	0.063	0.067
c	0.08	0.15	0.25	0.003	0.006	0.010
b	0.30	0.40	0.50	0.012	0.016	0.020
e	0.95 BSC			0.037 BSC		
e1	1.90 BSC			0.075 BSC		
L	0.30	0.45	0.60	0.012	0.018	0.024

Taping Specification

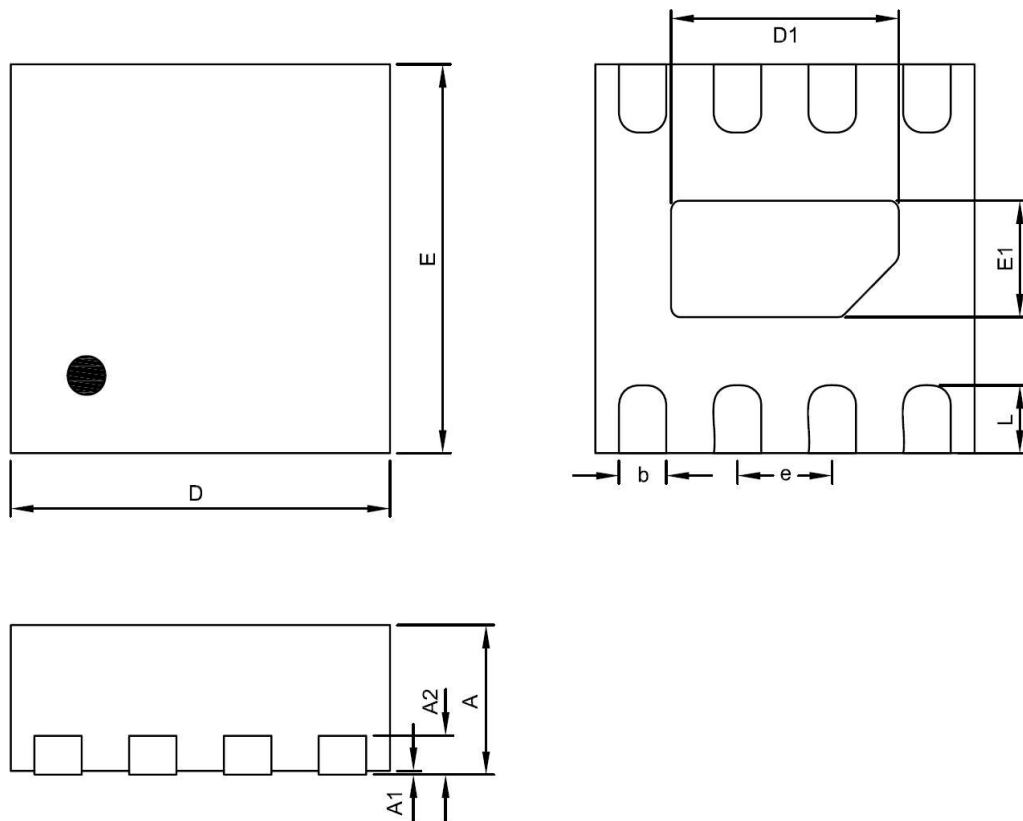

PACKAGE	Q'TY/REEL
SOT-23-5	3,000 ea



TDFN2X2-8 (RC) Package

Symble	DIMENSION IN MM			DIMENSION IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A	0.70	0.75	0.80	0.0276	0.0295	0.0315
A1	0.00	---	0.05	0.0000	---	0.0020
A2	0.19	0.20	0.21	0.0075	0.0079	0.0083
D	1.95	2.00	2.05	0.0768	0.0787	0.0807
E	1.95	2.00	2.05	0.0768	0.0787	0.0807
D1	1.15	1.20	1.25	0.0453	0.0472	0.0492
E1	0.55	0.60	0.65	0.0217	0.0236	0.0256
b	0.18	0.23	0.28	0.0071	0.0091	0.0110
e	0.50 BSC			0.0197 BSC		
L	0.30	0.35	0.40	0.0118	0.0138	0.0157

Taping Specification



PACKAGE	Q'TY/REEL
TDFN2X2-8	3,000 ea

GMT Inc. does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and GMT Inc. reserves the right at any time without notice to change said circuitry and specifications.